
RS1A THRU RS1M-HAF

Surface Mount Fast Recovery Rectifiers
Reverse Voltage - 50 to 1000 V
Forward Current - 1 A

PINNING

PIN	DESCRIPTION
1	Cathode
2	Anode

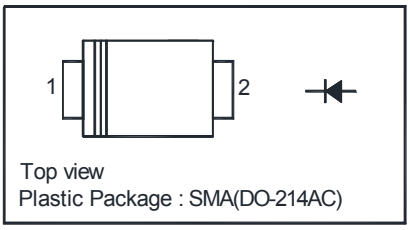

Top view
Plastic Package : SMA(DO-214AC)

Features
- For surface mounted applications
- Low profile package
- Glass Passivated Chip Junction
- Easy to pick and place
- Fast reverse recovery time
- Halogen and Antimony Free(HAF), RoHS compliant

Mechanical Data
- **Case:** SMA (DO-214AC) molded plastic
- **Terminals:** Solderable per MIL-STD-750, Method 2026

Absolute Maximum Ratings and Characteristics
Ratings at 25℃ ambient temperature unless otherwise specified. Single phase, half wave, 60Hz, resistive or inductive load. For capacitive load, derate current by 20%.

Parameter	Symbols	RS1A	RS1B	RS1D	RS1G	RS1J	RS1K	RS1M	Units
Maximum Repetitive Peak Reverse Voltage	V_{RRM}	50	100	200	400	600	800	1000	V
Maximum RMS Voltage	V_{RMS}	35	70	140	280	420	560	700	V
Maximum DC Blocking Voltage	V_{DC}	50	100	200	400	600	800	1000	V
Maximum Average Forward Current at T_C = 125℃	$I_{F(AV)}$	1							A
Peak Forward Surge Current 8.3 ms Single Half Sine-wave Superimposed on Rated Load (JEDEC method)	I_{FSM}	30							A
Maximum Forward Voltage at I_F = 1A	V_F	1.3							V
Maximum DC Reverse Current at T_J = 25℃ at Rated DC Blocking Voltage at T_J = 125℃	I_R	5 50							μA
Maximum Reverse Recovery Time [1]	t_{rr}	150				250	500		ns
Typical Junction Capacitance at V_R = 4 V, f = 1 MHz	C_j	15							pF
Typical Thermal Resistance [2]	$R_{\theta JA}$	75							℃/W
Operating and Storage Temperature Range	T_j, T_{stg}	- 55 to + 150							℃

[1] Measured with I_F = 0.5 A, I_R = 1 A, I_{rr} = 0.25 A.
[2] P.C.B. mounted with 1.0 X 1.0" (2.54 X 2.54 cm) copper pad areas.

Dated: 10/07/2023 JD&SS Rev: 03

Electrical Characteristic Curves

Fig.1 Forward Current Derating Curve

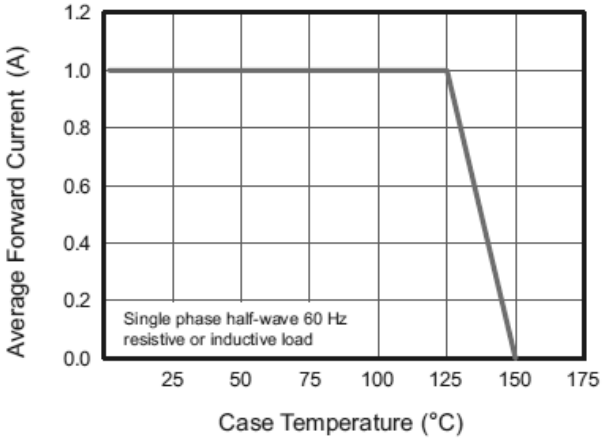


Fig.2 Typical Reverse Characteristics

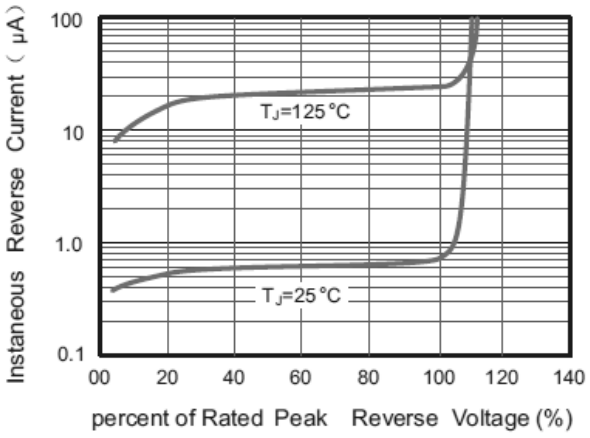


Fig.3 Typical Instaneous Forward Characteristics

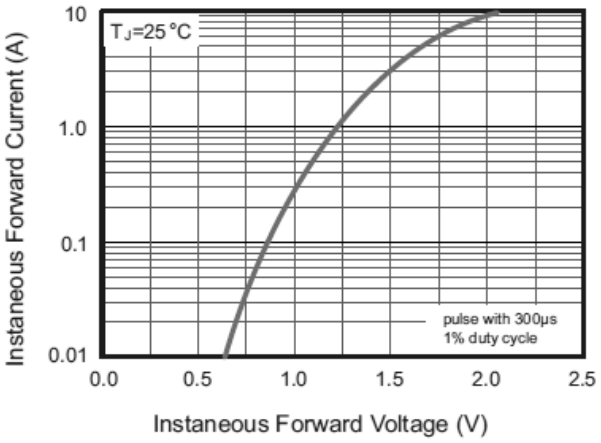


Fig.4 Typical Junction Capacitance



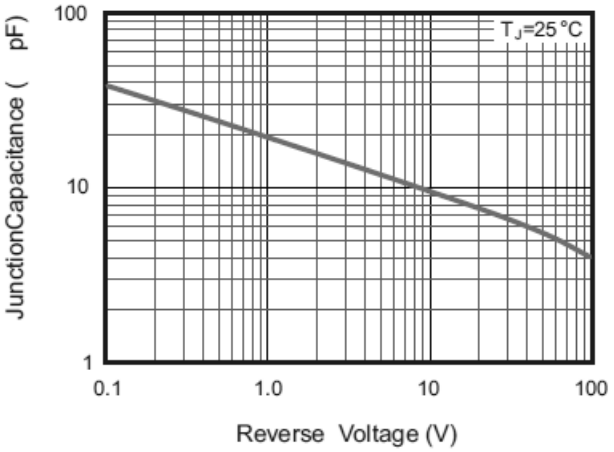



Fig.5 Maximum Non-Repetitive Peak Forward Surage Current

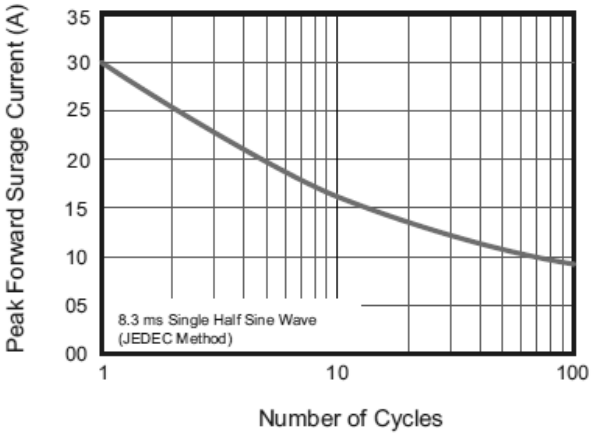

Package Outline Dimensions in inches (millimeters) SMA(DO-214AC)

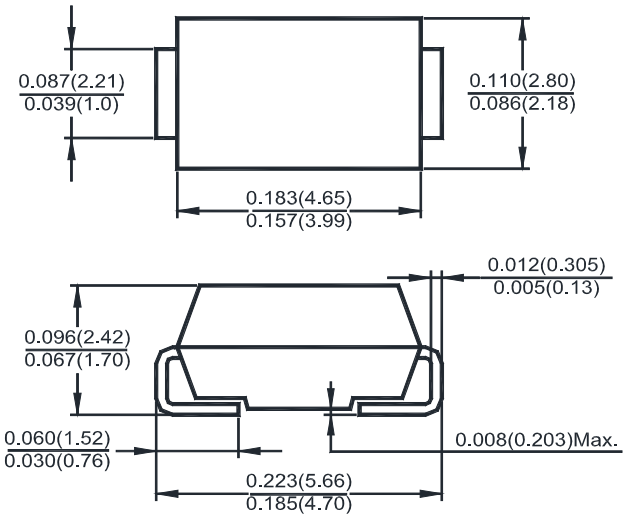

Recommended Soldering Footprint



Marking information


" RS1* " = Part No.

Type	Marking	Type	Marking	Type	Marking	Type	Marking
RS1A	RS1A	RS1B	RS1B	RS1D	RS1D	RS1G	RS1G
RS1J	RS1J	RS1K	RS1K	RS1M	RS1M		

" III " = Cathode line

" • " = HAF (Halogen and Antimony Free)

Font type: Arial



Disclaimer: Our company reserve the right to make modifications, enhancements, improvements, corrections or other changes to improve product design, functions and reliability, anytime without notice. Semtech Electronics Limited makes no warranties, representations or warranties regarding the suitability of its products for any particular purpose, and does not accept any liability arising from the application or use of any product or circuit such as: Apply to medical, military, aircraft, space or life support equipment and expressly waive any and all liability, including but not limited to special, consequential or collateral damage.