
THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION 20
© COPYRIGHT 20 BY - ALL RIGHTS RESERVED.

LOC	DIST
GP	00


REVISIONS


P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	RELEASED PER ECO-12-013192	06SEP2012	BMM	MRS

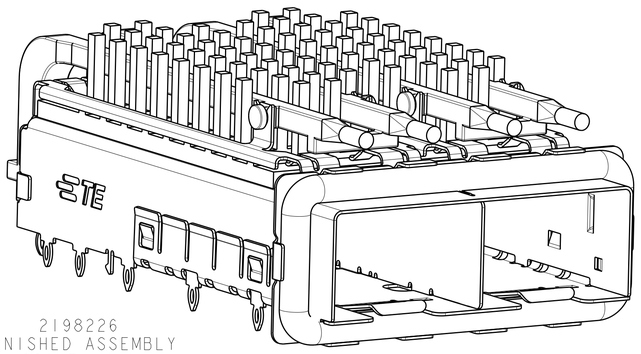


2198226
FINISHED ASSEMBLY
SCALE 4:1

1. MATERIAL:
   CAGE ASSEMBLY: 0.25mm THICK NICKEL SILVER ALLOY
   GASKET RETENTION PLATE: STAINLESS STEEL
   EMI GASKET: PLATED FILLED SILICONE
   HEATSINK/LIGHTPIPE CLIP: STAINLESS STEEL
   HEATSINK: ALUMINUM
   LIGHTPIPE: POLYCARBONATE, CLEAR
2. FINISH:
   HEATSINK: ELECTROLESS NICKEL
   HEATSINK/LIGHTPIPE CLIP: PASSIVATE
3. DATUM AND BASIC DIMENSIONS ESTABLISHED BY CUSTOMER.
4. PADS AND VIAS CHASSIS GROUND.
5. MATES WITH SFP MSA COMPLIANT RECIEVERS.
6. INTERPRETATION OF DATUM REFERENCE FRAME IN ACCORDANCE WITH SECT 4.4.1.1 OR ASME Y14.5M-1994.
7. HOLE PATTERN REPEATS FOR EACH PORT, SPACING BETWEEN PORTS IS 14.25mm.
8. REFERENCE APPLICATION SPEC. 114-13120, HOLE A, FOR RECOMMENDED DRILL HOLE DIAMETER AND PLATING THICKNESS.
9. REFERENCE APPLICATION SPEC. 114-13120, HOLE B, FOR RECOMMENDED DRILL HOLE DIAMETER AND PLATING THICKNESS.
10. MINIMUM PC BOARD THICKNESS:
    SINGLE SIDED: 1.5mm
11. CERTAIN MATING TRANCEIVERS MAY REQUIRE ADDITIONAL PCB THICKNESS THAT WOULD NEED TO BE DETERMINED BY THE CUSTOMER.
12. PRODUCT COMPLIES WITH SPECIFICATION SFF-8433 IMPROVED PLUGGABLE FORM FACTOR FOR SFP+ GANGED CAGES.
13. DIMENSION APPLIES PRIOR TO INSERTION OF SFP MODULE.
14. HEATSINK, HEATSINK CLIP, AND LIGHTPIPE SHIPPED UNASSEMBLED TO CAGE ASSEMBLY. CAGE ASSEMBLY TO BE PRESSED INTO PCB PRIOR TO ATTACHING HEATSINK, HEATSINK CLIP, AND LIGHTPIPE TO THE CAGE ASSEMBLY.
15. PACKAGED AS A COMPLETE ASSEMBLY.

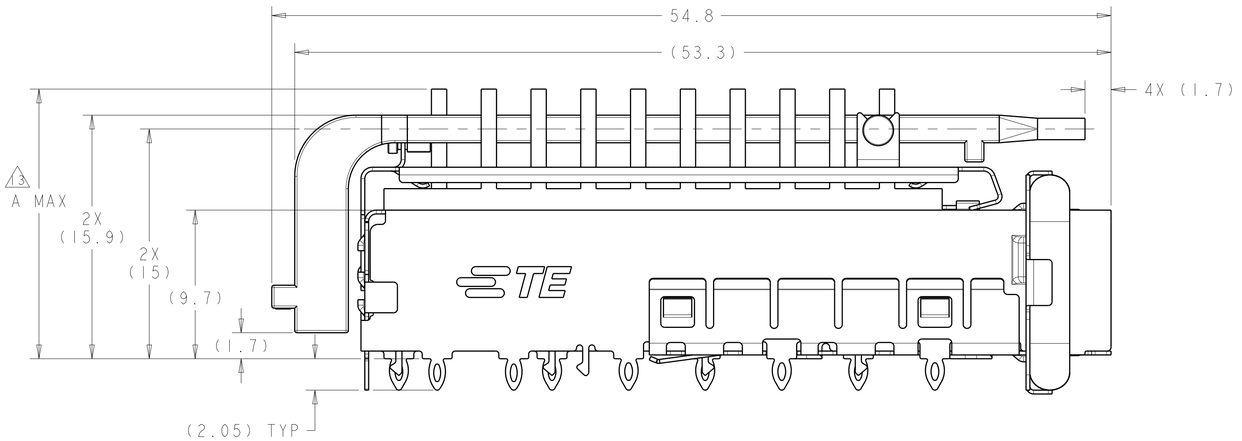

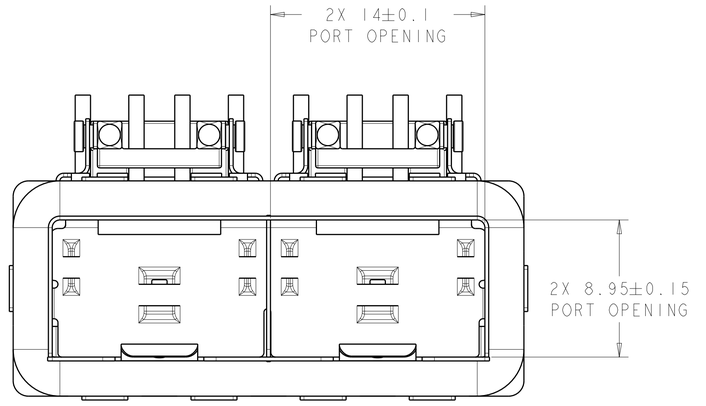

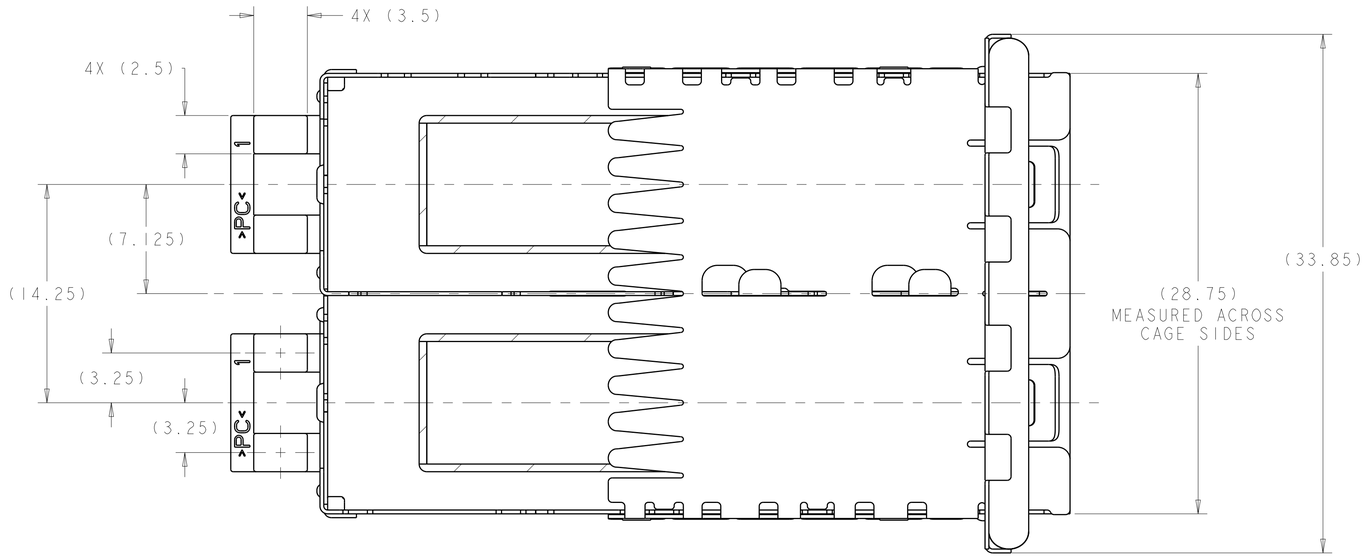

15 22.5	NETWORKING, TALL	2198226-4
15 18.1	NETWORKING, SHORT	2198226-3
14 15.5	SAN	2198226-2
14 13.2	PCI	2198226-1
A MAX	APPLICATION	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ±0.13
1 PLC ±0.1
2 PLC ±0.08
3 PLC ±.05
4 PLC ±.05
ANGLES ±1

MATERIAL 1

FINISH 2

DWN B MATTHEWS 14OCT2011
CHK M SCHMITT 14OCT2011
APVD M SCHMITT 14OCT2011
PRODUCT SPEC 108-2364
APPLICATION SPEC 114-13120
WEIGHT -

TE Connectivity

NAME SFP+ ENHANCED 1X2 CAGE ASSEMBLY, PRESS-FIT, EMI GASKET WITH HEATSINK AND LIGHTPIPE

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A1	00779	C-2198226	-


CUSTOMER DRAWING | SCALE 5:1 | SHEET 1 OF 3 | REV A

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION 20
© COPYRIGHT 20 BY - ALL RIGHTS RESERVED.


LOC	DIST
GP	00

REVISIONS


P	LTR	DESCRIPTION	DATE	DWN	APVD
	-	SEE SHEET 1	-	-	-

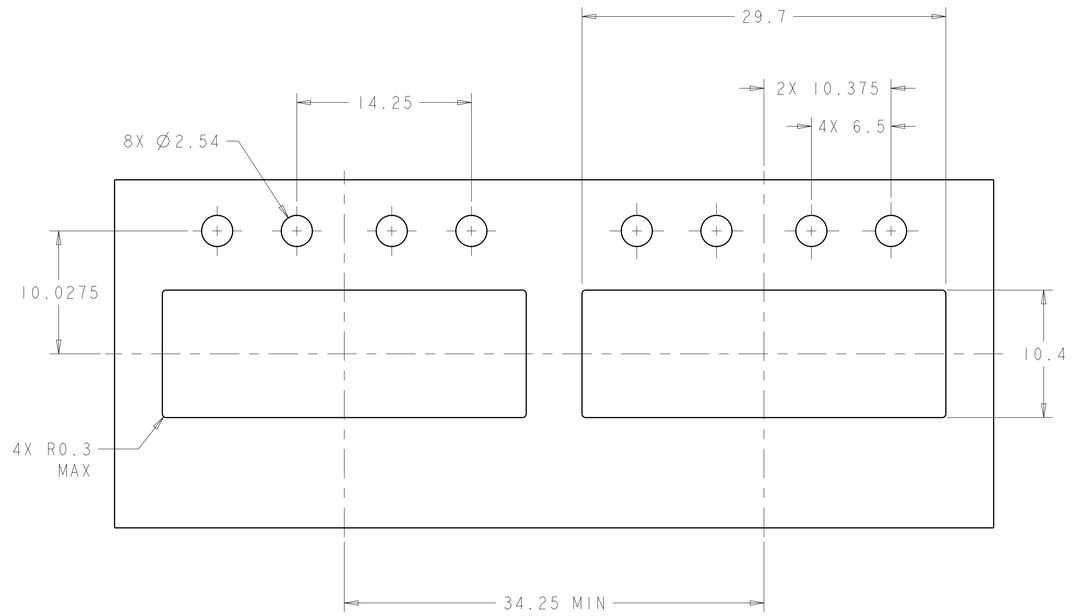

RECOMMENDED BEZEL CUTOUT
SCALE 4:1

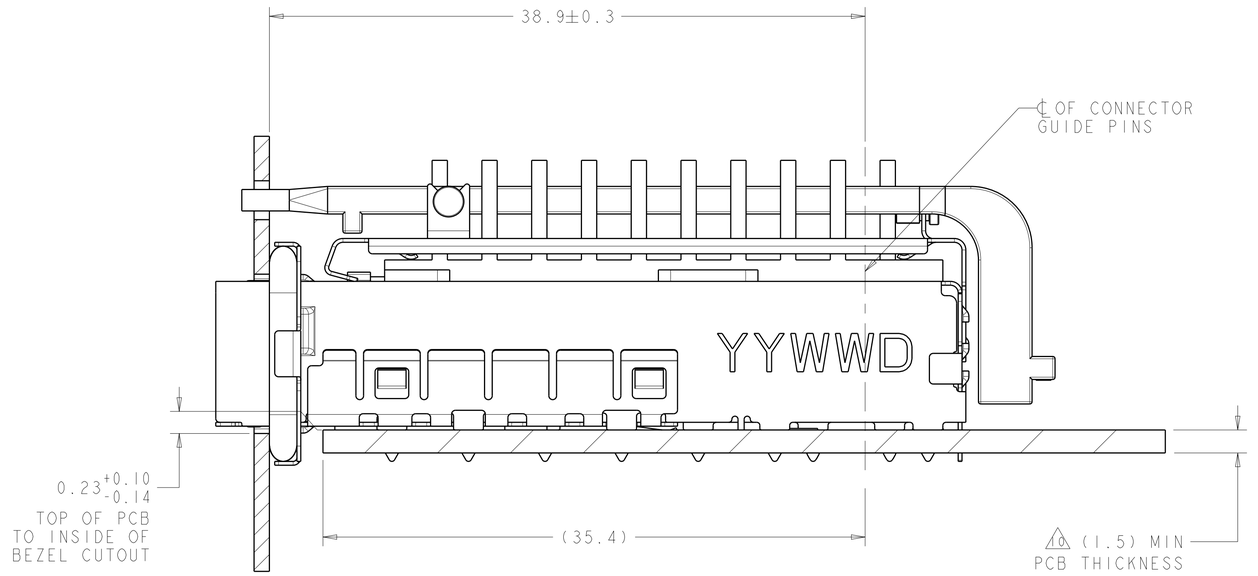

2198226
MOUNTED ON PC BOARD
SHOWN THRU RECOMMENDED BEZEL

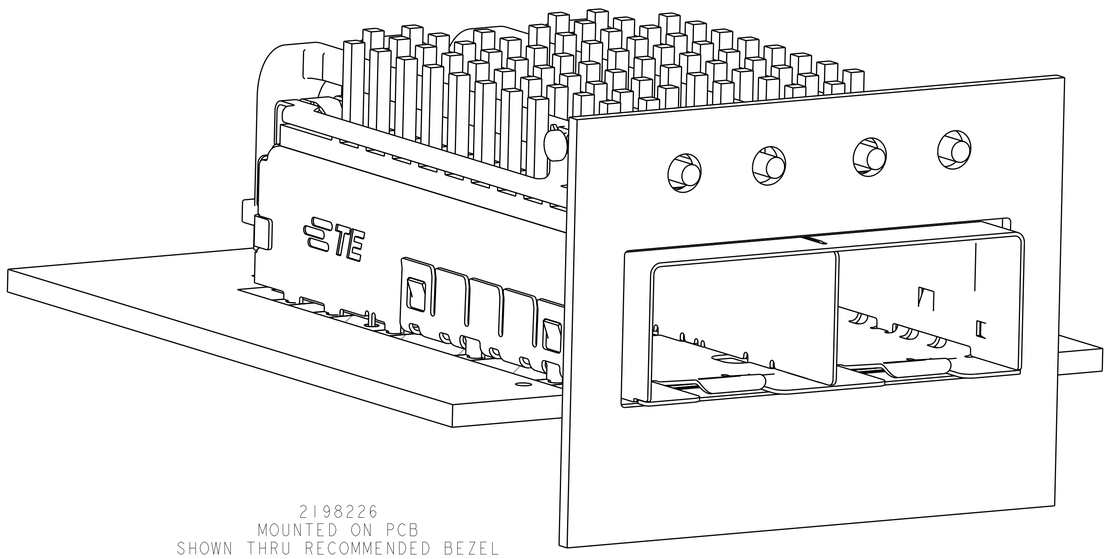

2198226
MOUNTED ON PCB
SHOWN THRU RECOMMENDED BEZEL

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN B MATTHEWS 14OCT2011	TE Connectivity
		CHK M SCHMITT 14OCT2011	
DIMENSIONS: mm	TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ±0.13, 1 PLC ±0.1, 2 PLC ±0.08, 3 PLC ±.05, 4 PLC ±.05, ANGLES ±1	APVD M SCHMITT 14OCT2011	NAME SFP+ ENHANCED 1X2 CAGE ASSEMBLY, PRESS-FIT, EMI GASKET WITH HEATSINK AND LIGHTPIPE
		PRODUCT SPEC 108-2364	
		APPLICATION SPEC 114-13120	SIZE A1 · CAGE CODE 00779 · DRAWING NO C-2198226 · RESTRICTED TO -
MATERIAL	FINISH	WEIGHT -	
		CUSTOMER DRAWING	SCALE 5:1 · SHEET 2 OF 3 · REV A


4805 (3/11)


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION 20
© COPYRIGHT 20 BY - ALL RIGHTS RESERVED.

LOC	DIST
GP	00


REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	-	SEE SHEET 1	-	-	-

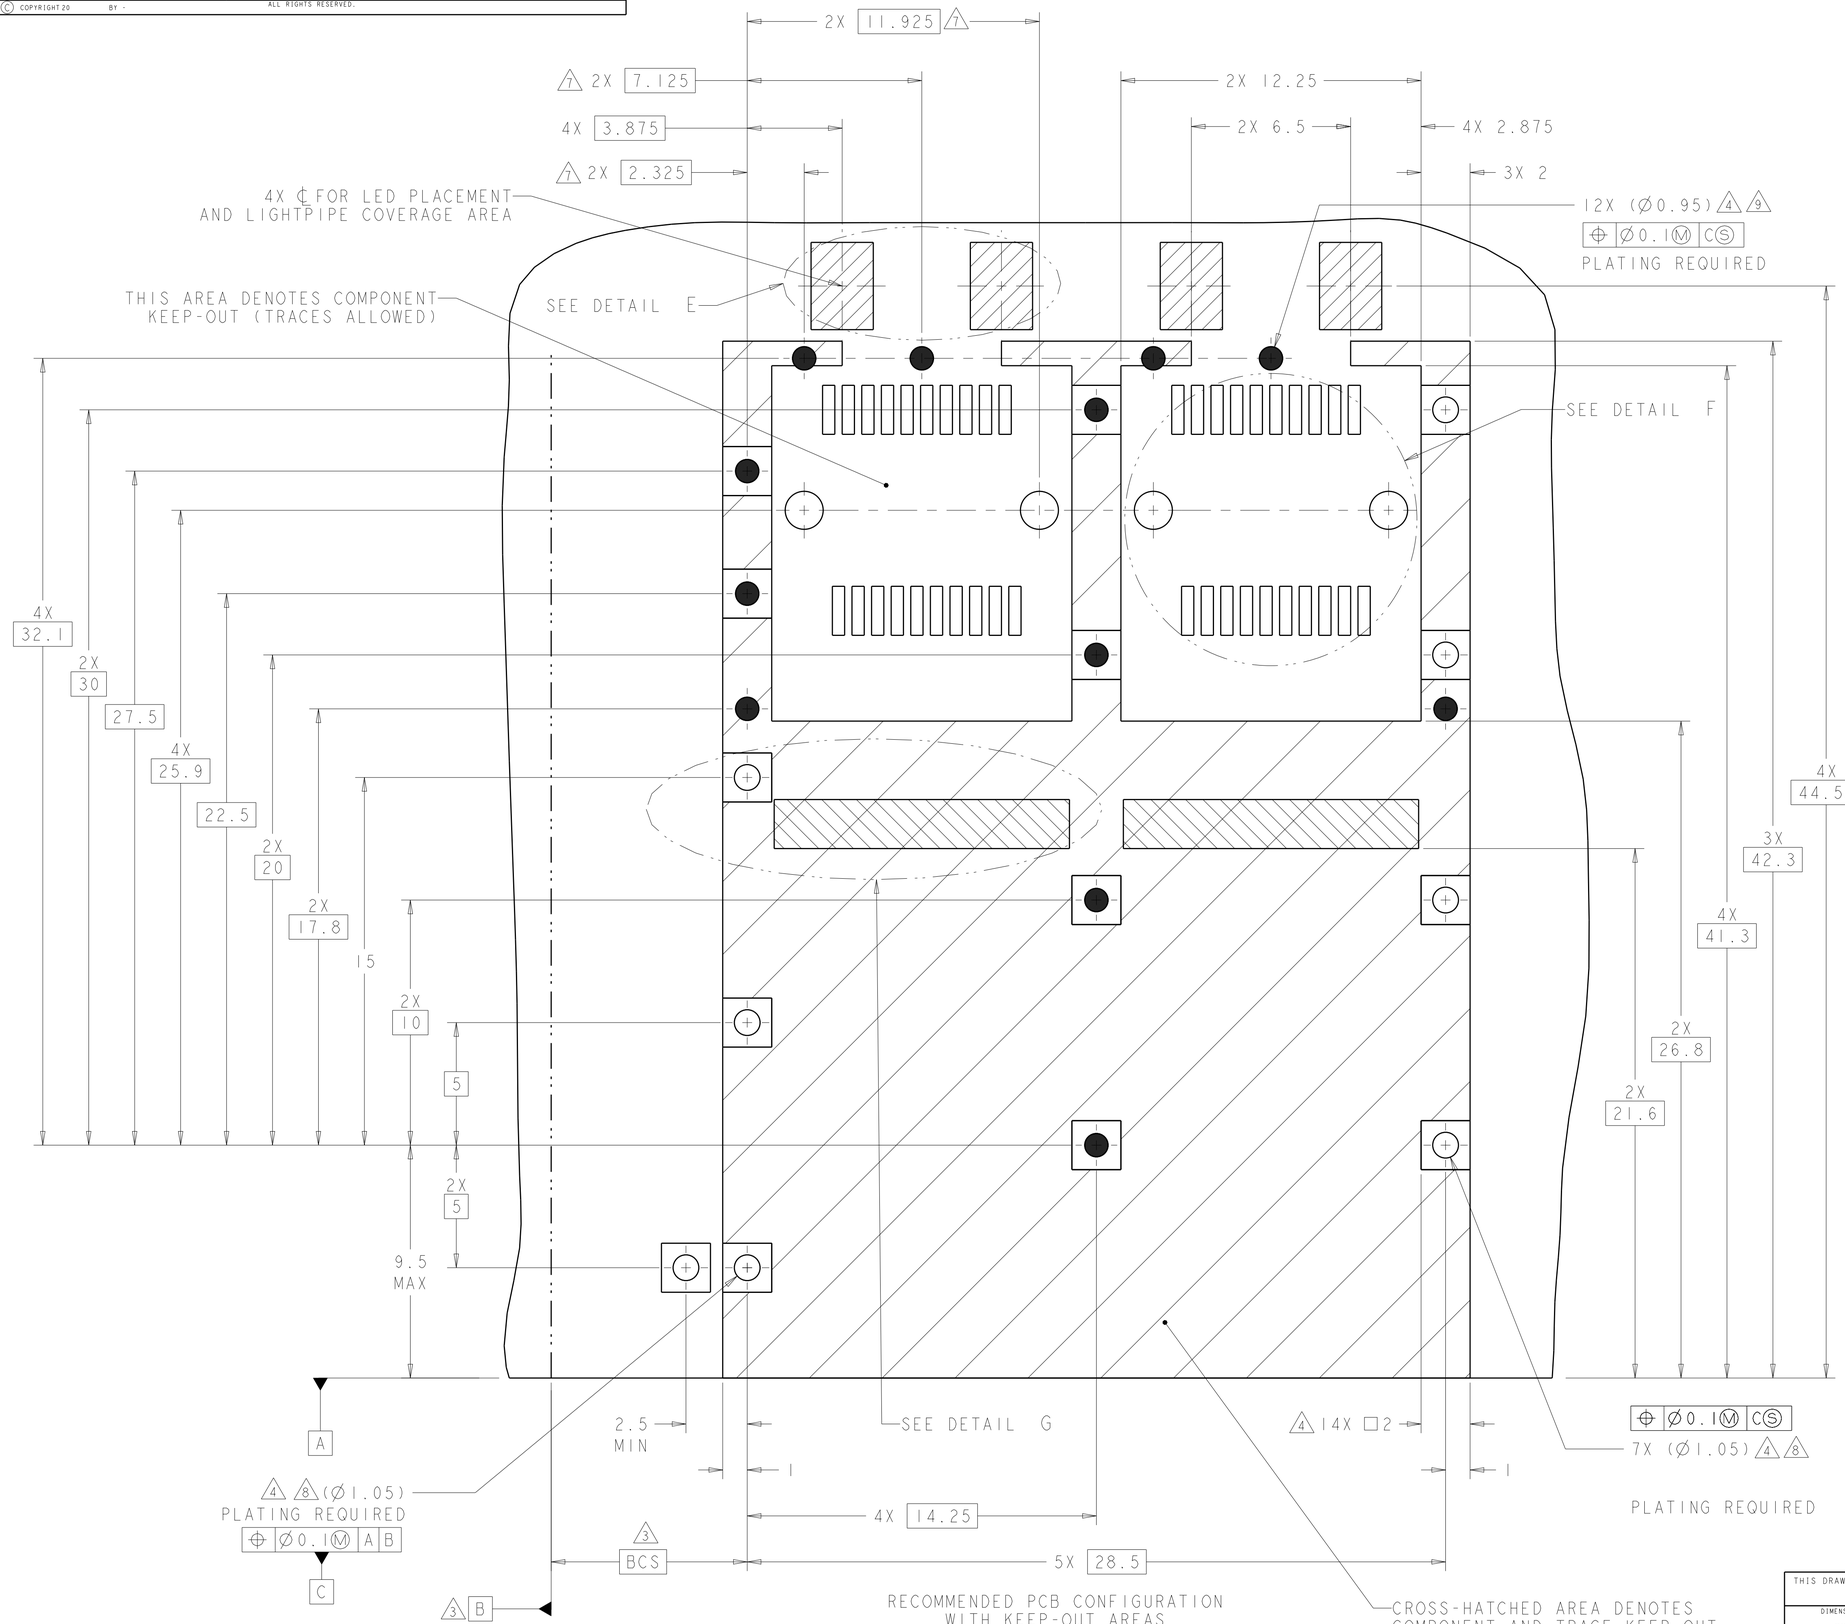


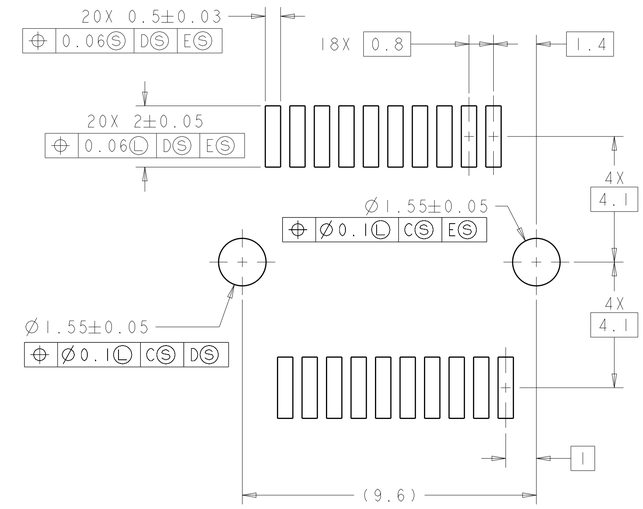

DETAIL F
SCALE 10:1

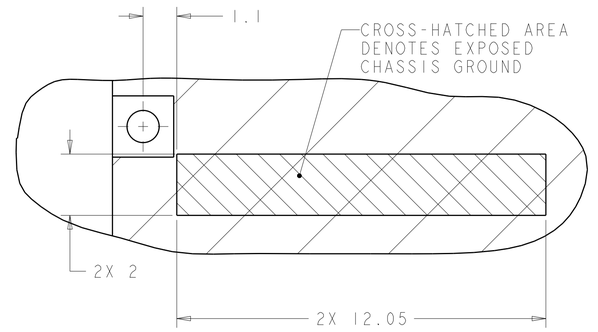

DETAIL G
SCALE 10:1

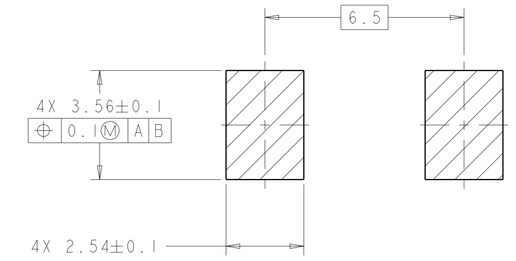

DETAIL E
SCALE 10:1

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ±0.13
1 PLC ±0.1
2 PLC ±0.08
3 PLC ±.05
4 PLC ±.05
ANGLES ±1

MATERIAL
FINISH

DWN B MATTHEWS 14OCT2011
CHK M SCHMITT 14OCT2011
APVD M SCHMITT 14OCT2011
PRODUCT SPEC 108-2364
APPLICATION SPEC 114-13120
WEIGHT -

TE Connectivity

NAME SFP+ ENHANCED 1X2 CAGE ASSEMBLY, PRESS-FIT, EMI GASKET WITH HEATSINK AND LIGHTPIPE

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A1	00779	C-2198226	-

CUSTOMER DRAWING | SCALE 5:1 | SHEET 3 OF 3 | REV A

4805 (3/11)