TECH PUBLIC
台舟电子

TPNX138BKMYL

60V N-Channel Mosfet With ESD

www.sot23.com.tw


Product Summary

- V_{DS} = 60V,I_D = 0.3A
  $R_{DS(ON)}$ < 2.5 Ω @ V_{GS}=4.5V
  $R_{DS(ON)}$ < 2.2Ω @ V_{GS}=10V
- ESD Rating : HBM 2000V

Application


- Direct logic-level interface: TTL/CMOS
- Drivers: relays, solenoids, lamps, hammers,display, memories, transistors, etc.
- Battery operated systems
- Solid-state relays

Package and Pin Configuration



DFN1006-3L

Circuit diagram



Marking:4S

Absolute Maximum Ratings (T_A=25℃unless otherwise noted)

Parameter		Symbol	Limit	Unit
Drain-Source Voltage		V_{DS}	60	V
Gate-Source Voltage		V_{GS}	±20	V
Continuous Drain Current (T_J =150℃)	T_A =25℃	I_D	0.3	A
	T_A =100℃		0.19	
Drain Current-Pulsed (Note 1)		I_{DM}	0.8	A
Maximum Power Dissipation		P_D	0.35	W
Operating Junction and Storage Temperature Range		T_J,T_{STG}	-55 To 150	℃


Thermal Characteristic

Thermal Resistance,Junction-to-Ambient (Note 2)	$R_{\theta JA}$	350	℃/W

Electrical Characteristics (T_A = 25°C unless otherwise noted)


Parameter	Symbol	Condition	Min	Typ	Max	Unit
Off Characteristics						
Drain-Source Breakdown Voltage	BV_{DSS}	V_{GS}=0V I_D=250μA	60		-	V
Zero Gate Voltage Drain Current	I_{DSS}	V_{DS}=60V,V_{GS}=0V	-	-	1	μA
Gate-Body Leakage Current	I_{GSS}	V_{GS}=±10V,V_{DS}=0V	-	-	±1	uA
		V_{GS}=±20V,V_{DS}=0V	-		±10	uA
On Characteristics (Note 3)						
Gate Threshold Voltage	$V_{GS(th)}$	V_{DS}=V_{GS},I_D=250μA	1	1.6		
Drain-Source On-State Resistance	$R_{DS(ON)}$	V_{GS}=4.5V, I_D=0.2A	-	1.9	2.5	Ω
		V_{GS}=10V, I_D=0.3A	-	1.8	2.2	Ω
Forward Transconductance	g_{FS}	V_{DS}=10V,I_D=0.2A	0.1	-	-	S
Dynamic Characteristics (Note4)						
Input Capacitance	C_{lss}	V_{DS}=30V,V_{GS}=0V, F=1.0MHz		27		PF
Output Capacitance	C_{oss}			18		PF
Reverse Transfer Capacitance	C_{rss}			2		PF
Switching Characteristics (Note 4)						
Turn-on Delay Time	$t_{d(on)}$	V_{DD}=30V,I_D=0.2A V_{GS}=10V,R_{GEN}=10Ω	-	10	-	nS
Turn-on Rise Time	t_r		-	50	-	nS
Turn-Off Delay Time	$t_{d(off)}$		-	17	-	nS
Turn-Off Fall Time	t_f		-	10	-	nS
Total Gate Charge	Q_g	V_{DS}=10V,I_D=0.3A, V_{GS}=4.5V	-	1.7	3	nC
Drain-Source Diode Characteristics						
Diode Forward Voltage (Note 3)	V_{SD}	V_{GS}=0V,I_S=0.2A	-	-	1.2	V
Diode Forward Current (Note 2)	I_S		-	-	0.3	A

DFN1006-3L Package Outline Drawing

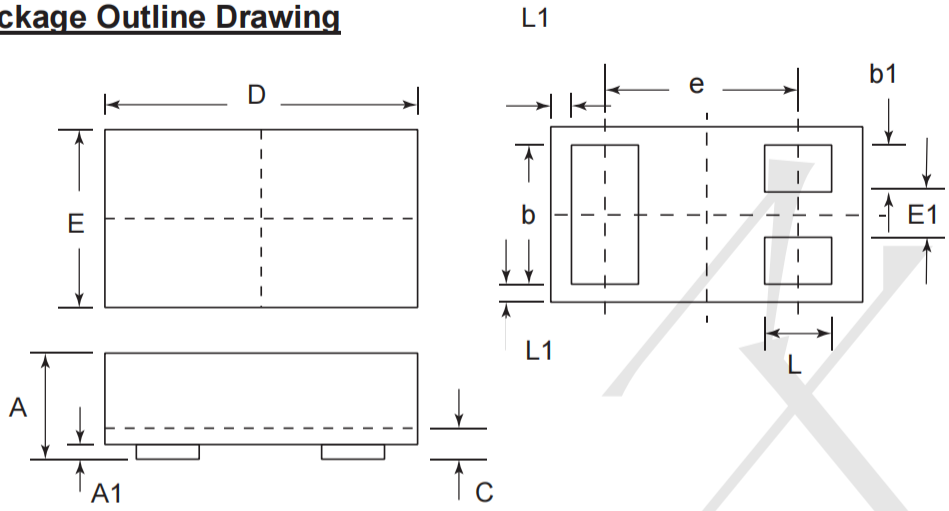

SYM	DIMENSIONS					
	MILLIMETERS			INCHES		
	MIN	NOM	MAX	MIN	NOM	MAX
A	0.45	0.50	0.55	0.018	0.020	0.022
A1	0.00	0.02	0.05	0.000	0.001	0.002
b	0.45	0.50	0.55	0.018	0.020	0.022
b1	0.10	0.15	0.20	0.004	0.006	0.008
C	0.12	0.15	0.18	0.005	0.006	0.007
D	0.95	1.00	1.05	0.037	0.039	0.041
e	0.65 BSC			0.026 BSC		
E	0.55	0.60	0.65	0.022	0.024	0.026
E1	0.15	0.20	0.25	0.006	0.008	0.010
L	0.20	0.25	0.30	0.008	0.010	0.012
L1	0.05 REF			0.0002 REF		

Suggested Land Pattern

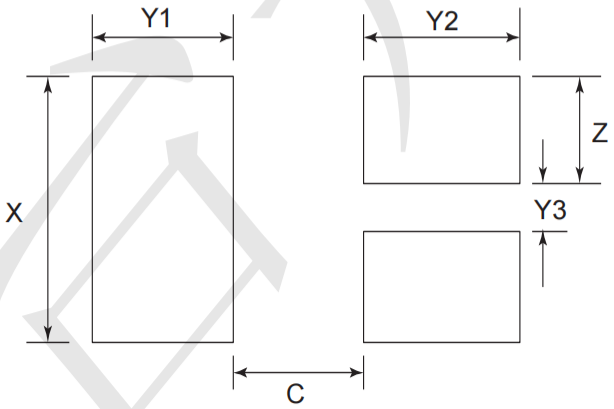

SYM	DIMENSIONS	
	MILLIMETERS	INCHES
C	0.25	0.010
X	0.65	0.024
Y1	0.50	0.020
Y2	0.50	0.020
Y3	0.25	0.010
Z	0.20	0.008