
SPTECH Silicon NPN Power Transistor

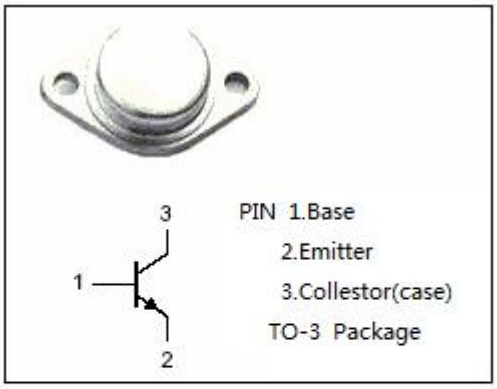

DESCRIPTION


- High Power Dissipation-
  : P_C= 100W@T_C= 25℃
- High Current Capability-
  : I_C = 10A

APPLICATIONS

- Designed for power amplifier , power switching ,DC-DC converter and regulator applications.

ABSOLUTE MAXIMUM RATINGS(T_a=25℃)

SYMBOL	PARAMETER	VALUE	UNIT
V_{CBO}	Collector-Base Voltage	100	V
V_{CEO}	Collector-Emitter Voltage	80	V
V_{EBO}	Emitter-Base Voltage	10	V
I_C	Collector Current-Continuous	10	A
I_E	Emitter Current-Continuous	10	A
I_B	Base Current-Continuous	3	A
P_C	Collector Power Dissipation @T_C=25℃	100	W
T_J	Junction Temperature	150	℃
T_{stg}	Storage Temperature	-65~150	℃

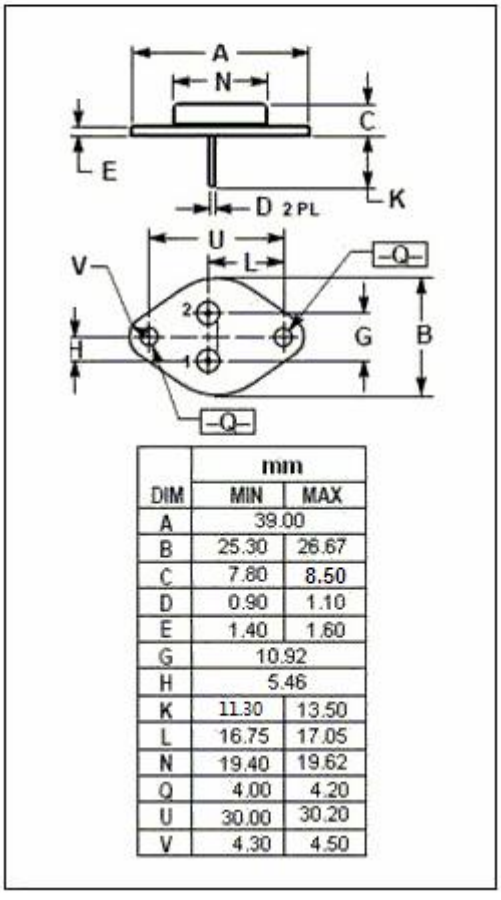

DIM	mm MIN	MAX
A	39.00	
B	25.30	26.67
C	7.80	8.50
D	0.90	1.10
E	1.40	1.60
G	10.92	
H	5.46	
K	11.30	13.50
L	16.75	17.05
N	19.40	19.62
Q	4.00	4.20
U	30.00	30.20
V	4.30	4.50

SPTECH Silicon NPN Power Transistor

ELECTRICAL CHARACTERISTICS

T_C=25℃ unless otherwise specified

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP.	MAX	UNIT
$V_{(BR)CEO}$	Collector-Emitter Breakdown Voltage	I_C= 10mA ; R_{BE}= ∞	80			V
$V_{(BR)EBO}$	Emitter-Base Breakdown Voltage	I_E= 1mA ; I_C= 0	10			V
$V_{CE(sat)}$	Collector-Emitter Saturation Voltage	I_C= 5A; I_B= 1A			1.5	V
$V_{BE(sat)}$	Base-Emitter Saturation Voltage	I_C= 5A; I_B= 1A			2.5	V
I_{CBO}	Collector Cutoff Current	V_{CB}= 50V; I_E= 0			0.5	mA
I_{EBO}	Emitter Cutoff Current	V_{EB}= 10V; I_C=0			10	mA
h_{FE-1}	DC Current Gain	I_C= 1A; V_{CE}= 5V	30		300	
h_{FE-2}	DC Current Gain	I_C= 5A; V_{CE}= 5V	10			
f_T	Current-Gain—Bandwidth Product	I_C= 1A ; V_{CE}= 10V		1		MHz
C_{OB}	Output Capacitance	I_E= 0; V_{CB}= 50V; f= 1MHz		200		pF

◆ **h_{FE-2} Classifications**

R	O	Y
30-90	50-150	100-300