
SPTECH Silicon NPN Power Transistors

DESCRIPTION

- DC Current Gain -h_{FE} = 30~150@ I_C= 0.3A
- Collector-Emitter Sustaining Voltage-
  : $V_{CEO(SUS)}$ = 250V(Min)





PIN 1. BASE
2.COLLECTOR
3. EMITTER
TO-220C package

APPLICATIONS


- Designed for line operated audio output amplifier,switchmode power supply drivers and other switching applications

ABSOLUTE MAXIMUM RATINGS(T_a=25℃)

SYMBOL	PARAMETER	VALUE	UNIT
V_{CBO}	Collector-Base Voltage	350	V
V_{CEO}	Collector-Emitter Voltage	250	V
V_{EBO}	Emitter-Base Voltage	5	V
I_C	Collector Current-Continuous	1.0	A
I_{CM}	Collector Current-Peak	2.0	A
I_B	Base Current	0.6	A
P_D	Collector Power Dissipation T_C=25℃	40	W
	Collector Power Dissipation T_a=25℃	2	
T_j	Junction Temperature	150	℃
T_{stg}	Storage Temperature Range	-65~150	℃

THERMAL CHARACTERISTICS

SYMBOL	PARAMETER	MAX	UNIT
$R_{th\ j\text{-}c}$	Thermal Resistance,Junction to Case	3.125	℃/W
$R_{th\ j\text{-}a}$	Thermal Resistance,Junction to Ambient	62.5	℃/W

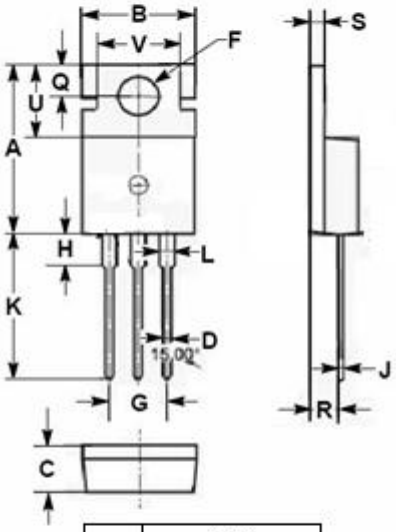

DIM	mm MIN	MAX
A	15.50	15.90
B	9.90	10.20
C	4.20	4.50
D	0.70	0.90
F	3.40	3.70
G	4.98	5.18
H	2.68	2.90
J	0.44	0.60
K	13.00	13.40
L	1.20	1.45
Q	2.70	2.90
R	2.30	2.70
S	1.29	1.35
U	6.45	6.65
V	8.66	8.86

SPTECH Silicon NPN Power Transistors

ELECTRICAL CHARACTERISTICS

T_C=25℃ unless otherwise specified

SYMBOL	PARAMETER	CONDITIONS	MIN	MAX	UNIT
$V_{CEO(SUS)}$	Collector-Emitter Sustaining Voltage	I_C= 30mA; I_B= 0	250		V
$V_{CE(sat)}$	Collector-Emitter Saturation Voltage	I_C= 1A; I_B= 0.2A		1.0	V
$V_{BE(on)}$	Base-Emitter On Voltage	I_C= 1A; V_{CE}= 10V		1.5	V
I_{CBO}	Collector Cutoff Current	V_{CB}= 350V; I_E= 0		1.0	mA
I_{CEO}	Collector Cutoff Current	V_{CE}= 150V; I_B= 0		1.0	mA
I_{EBO}	Emitter Cutoff Current	V_{EB}= 5V; I_C= 0		1.0	mA
h_{FE-1}	DC Current Gain	I_C= 0.3A; V_{CE}= 10V	30	150	
h_{FE-2}	DC Current Gain	I_C= 1A; V_{CE}= 10V	10		
f_T	Current-Gain—Bandwidth Product	I_C= 0.1A; V_{CE}= 10V	10		MHz