
SPTECH Silicon NPN Power Transistor 2SC4382

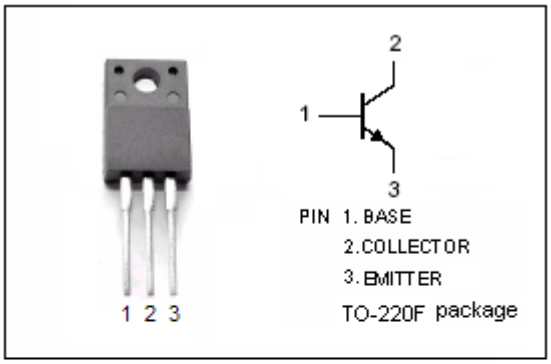

DESCRIPTION


- Collector-Emitter Breakdown Voltage-
  : $V_{(BR)CEO}$= 200V(Min)
- DC Current Gain-
  : h_{FE}= 60(Min)@ (V_{CE}= 10V, I_C= 0.7A)
- Complement to Type 2SA1668

APPLICATIONS

- Designed for TV vertical output ,audio output driver and general purpose applications.

ABSOLUTE MAXIMUM RATINGS(T_a=25℃)

SYMBOL	PARAMETER	VALUE	UNIT
V_{CBO}	Collector-Base Voltage	200	V
V_{CEO}	Collector-Emitter Voltage	200	V
V_{EBO}	Emitter-Base Voltage	6	V
I_C	Collector Current-Continuous	2	A
I_B	Base Current-Continuous	1	A
P_C	Collector Power Dissipation @T_C=25℃	25	W
T_J	Junction Temperature	150	℃
T_{stg}	Storage Temperature	-55~150	℃

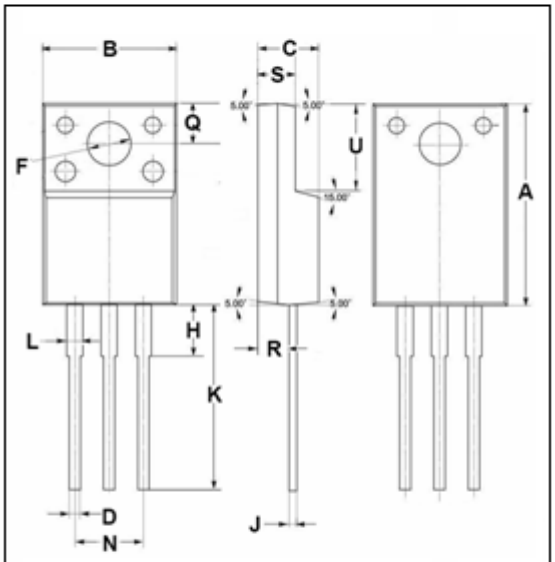

DIM	mm MIN	MAX
A	14.95	15.05
B	10.00	10.10
C	4.40	4.60
D	0.75	0.80
F	3.10	3.30
H	3.70	3.90
J	0.50	0.70
K	13.4	13.6
L	1.10	1.30
N	5.00	5.20
Q	2.70	2.90
R	2.20	2.40
S	2.65	2.85
U	6.40	6.60

SPTECH Silicon NPN Power Transistor

ELECTRICAL CHARACTERISTICS

Tj=25℃ unless otherwise specified

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP.	MAX	UNIT
$V_{(BR)CEO}$	Collector-Emitter Breakdown Voltage	I_C= 25mA ; I_B= 0	200			V
$V_{CE(sat)}$	Collector-Emitter Saturation Voltage	I_C= 0.7A; I_B= 0.07A			1.0	V
I_{CBO}	Collector Cutoff Current	V_{CB}= 200V ; I_E= 0			10	μA
I_{EBO}	Emitter Cutoff Current	V_{EB}= 6V; I_C= 0			10	μA
h_{FE}	DC Current Gain	I_C= 0.7A ; V_{CE}= 10V	60			
C_{OB}	Output Capacitance	I_E= 0; V_{CB}= 10V; f= 1MHz		35		pF
f_T	Current-Gain—Bandwidth Product	I_E= -0.2A ; V_{CE}= 12V		15		MHz

Switching Times

t_{on}	Turn-On Time	I_C= 1A; I_{B1}= -I_{B2}= 0.1A; V_{CC}= 20V; R_L= 20Ω		1.0		μs
t_{stg}	Storage Time			3.0		μs
t_f	Fall Time			1.5		μs