This document is the property of Xinshengyue Corporation and is delivered on the express condition that it is not to be disclosed, reproduced or used, in whole or in part, for manufacture or sale by anyone other than Xinshengyue Corporation without its prior concert&that no right is granted to disclose or to use any information in this document.

REV.	ECN NO.	DESCRIPTION	DATE	DESIGN
A	ECN NO.	NEW DRAWING	2026.05.05	Janus

P/N: 103042-120101

- 1: DIP
- PACKAGING: 2. TRAY
- SERIES NUMBER: 01~99
- CONTACT AREA PLATED 1: Au G/F
- SOLDER AREA PLATED 0: SN

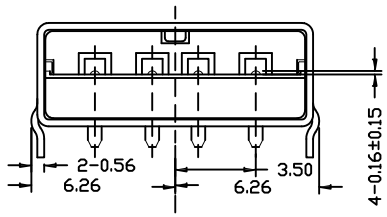

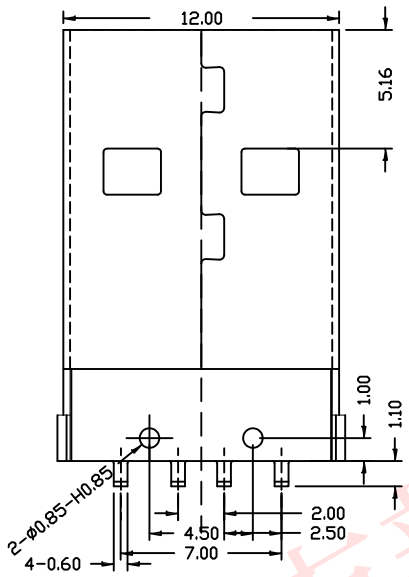

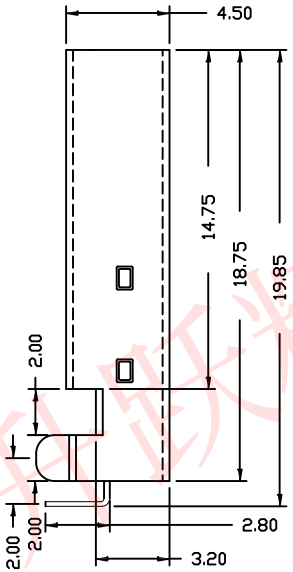

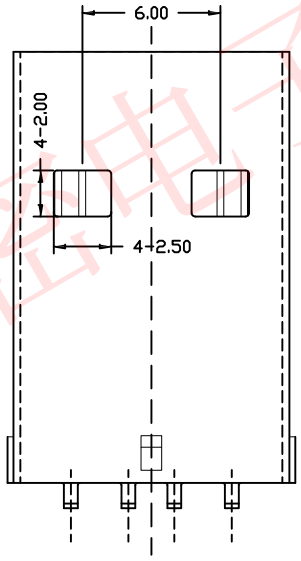



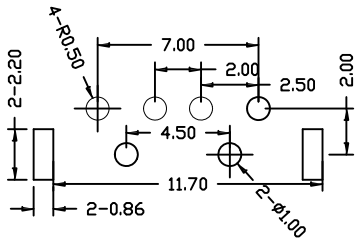

规格说明:Specifications:
电气特性:Electrical:
1.额定电流：Current Rating
1.5A/contact terminal
2.额定电压：Voltage Rating
30V DC
3.接触阻抗:Contact Resistance
30 milliohms MAX
4.耐电压:Dielectnic Withstanding Voitage:
500 V AC AT Sea Levol
5.绝缘阻抗:Lnsulation Resistance:
1000MEGA ohms MIN
物理性能:Mechanical:
1.插拔力：Cnnector Mate and Unmate Force
Mate force:35N(MAX)
Unmate force:10N(MIN)
2.端子保持力：Terminal Retenion
10N(MIN)
原材料:Matorial:
1.塑胶:Housing:
Hing Temperature Tnermaplastics,
UL 94V-0 PBT White ROHS
2.端子:Contact:Copper Alloy C2680
3.外壳:Shell: Copper Alloy SPCC
电镀:Finish:
1.端子:Contact: Piated Gold G/F in Mating Area;
Tin On Solder Talls
2.外壳:Shell:
Nickel Plating

TOLERANCE		NAME(INTENDED USE) CUSTOMER DRAWING	XSUA® 深圳市新升跃精密电子有限公司 SHENZHEN XINSHENGYUE PRECISION ELECTRONICS CO., LTD
X.X ±0.30	X.° ±10°	PART NO.	TITLE: USB AM 90度DIP弯脚铁壳白胶(H=5.85)
.XX ±0.20	.X° ± 8°		
.XXX ±0.10	.XX° ± 5°	DESIGN: Arvin	DRAWG NO. C-103042
UNITS	mm	CHED:	SCALE 1:1 / SHEET 1/1 / REV. A
MATERILA		APPD:	
FINISH			

深圳市新升跃精密电子有限公司