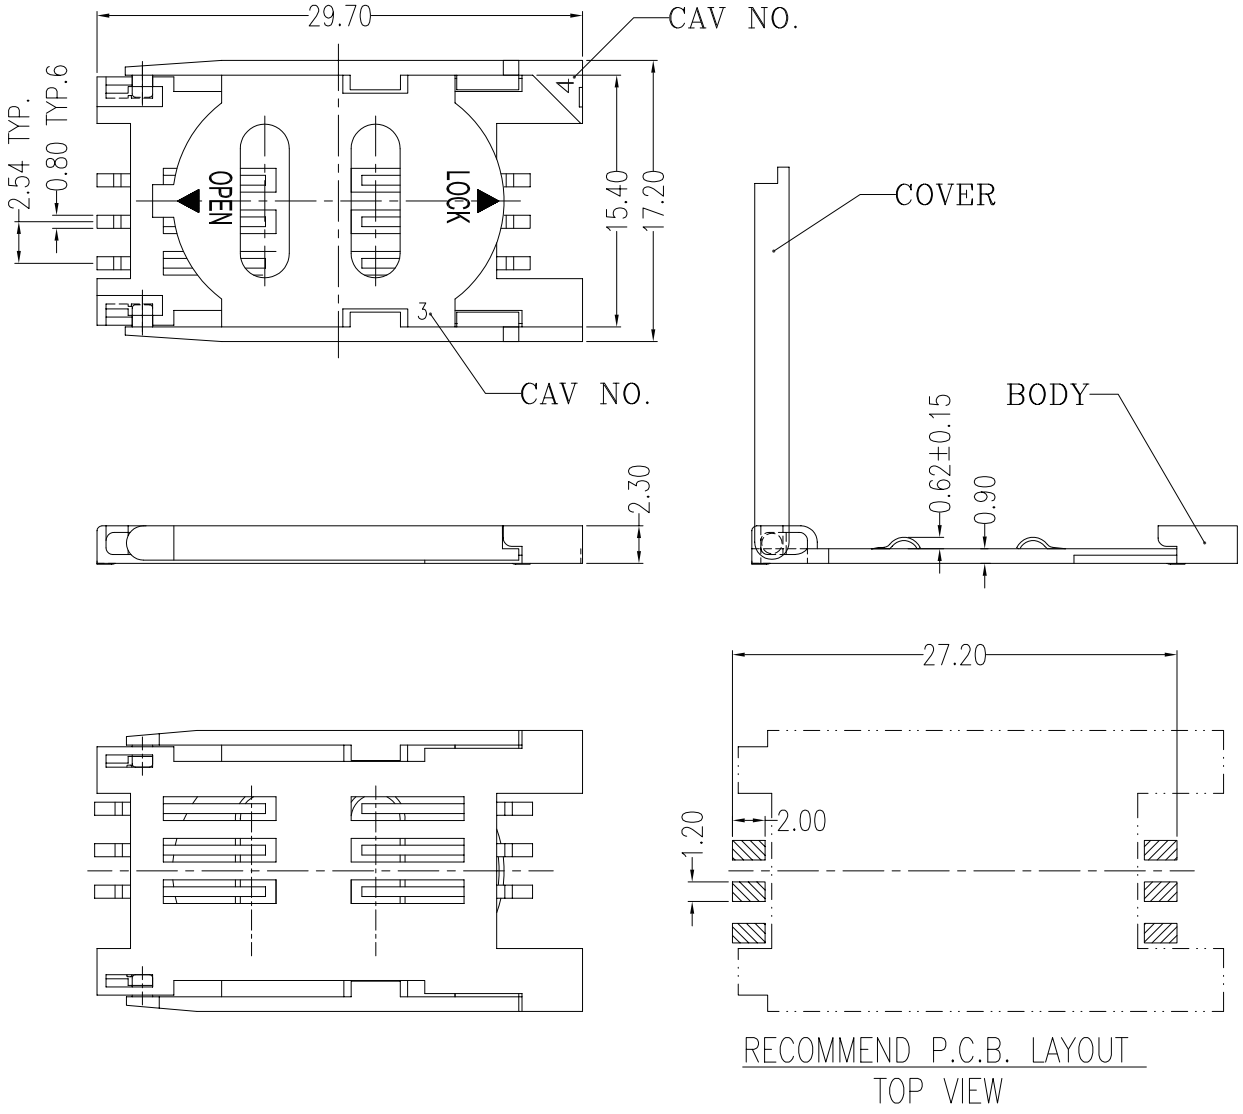


NOTES

*Material:

1.Body: PPS UL 94V-0 Rated, Color:Black;
2.Cover: LCP UL 94V-0 Rated, Color:Black;
3.Contact: Phosphor Bronze;
4.Contact Plating: Gold Plating Over Nickel on Contact Area, Tin Plating on Solder Tail.


*Specification:

1.Current Rating: 0.5 AMP. Max.;
2.Dielectric Withstanding Voltage: 500V AC R.M.S For One Minute;
3.Insulation Resistance: 1000 M Ohms Min. AT 500V AC;
4.Contact Resistance: 30 M Ohms Max.;
5.Operatimg Temperature: -25°C to +85°C;
6.Processing Temp: 245°C for 30~60 Seconds Max.;
7.Durability: 5000 Cycles.

RoHS Compliant

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES
煜倫股份有限公司
www.morethanall.com

DRAWING BY CY	TOLERANCES ARE
CHECKED BY GENIUS	X. ±
UNIT / mm	SCALE 1 : 1	.X ± 0.20
DATE	.XX ± 0.10
SIZE A4	PPOJECTION	.XXX ±
	ANG ±





ORDER INFORMATION

SCV-W2523XR-06-LF

SERIES
90°SMT
REEL
06WAY
LEADFREE
PAD TO PAD 25.2mm
NON POST
BODY HIGH 2.3mm

DESCRIPTION: Sim Card 6Pin Without Post

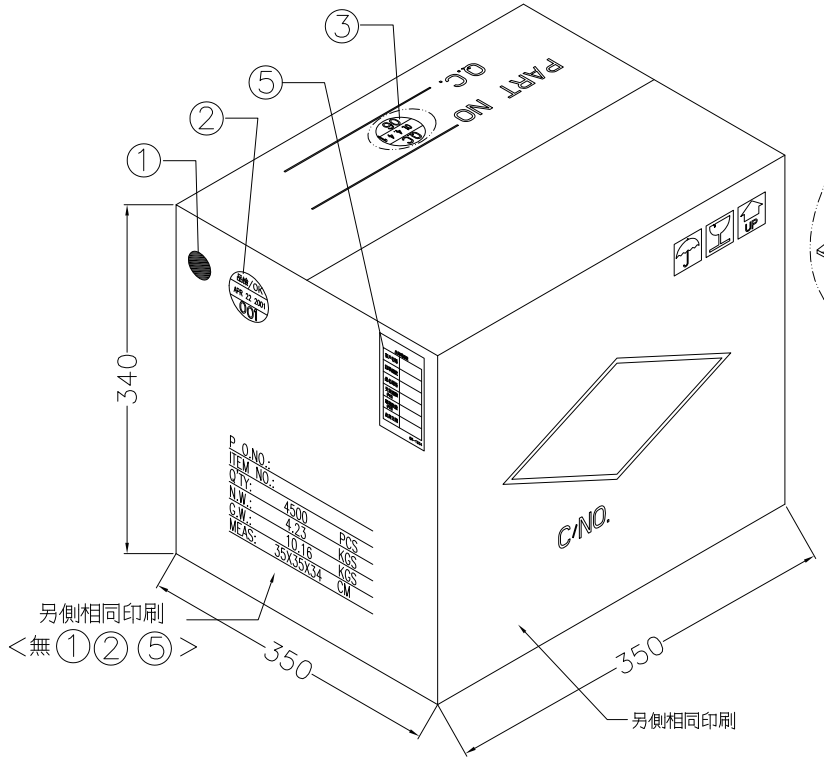

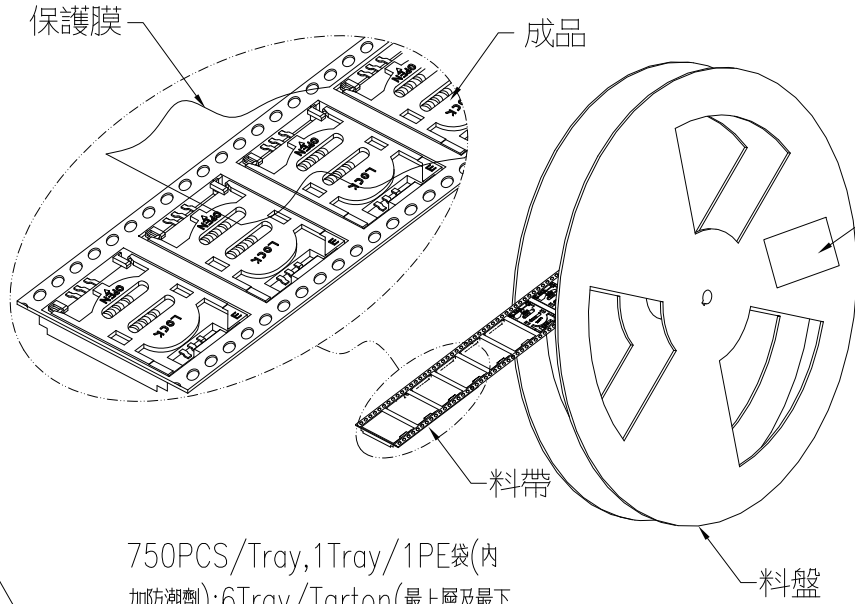

750PCS/Tray,1Tray/1PE袋(內加防潮劑);6Tray/Tarton(最上層及最下層各放一塊保力龍，料盤的四周加放三角形防振紙板)4500PCS/Tarton.

出貨明細表

客戶名稱	
訂單編號	
品名規格	
交貨總數(PCS)	
單箱數量(PCS)	
出貨日期	

⑤ QR-1504

注:加蓋印記位置

① 月份標記
② 品管注介章(檢驗合格章)
③ 生產制造日期,檢驗員代號.
④ 該產品的料號.
⑤ 出貨明細表

材質:
外箱:K=K<雙浪型>

PACKING DETAILS(無柱有上蓋成品)

P/O.NO.:
ITEM NO.:


Q'TY:	4500	PCS
N.W.:	4.23	KGS
G.W.:	10.16	KGS
MEAS:	35X35X34	CM

注：1.外箱隨產品的不同而印刷(側面)
2.料帶專用包裝.

RoHS Compliant

MORETHANALL PCB CONNECTORS Cable ASSEMBLIES
煜倫股份有限公司
www.morethanall.com

DRAWING BY CY		TOLERANCES ARE
CHECKED BY GENIUS		X. ± .X ± 0.20 .XX ± 0.10 .XXX ± ANG ±
UNIT / mm	SCALE 1 : 1	
DATE		
SIZE A4	PPOJECTION	





ORDER INFORMATION


SCV-W2523XR-06-LF

SERIES
90°SMT
REEL
06WAY
LEADFREE
PAD TO PAD 25.2mm
NON POST
BODY HIGH 2.3mm

DESCRIPTION: Sim Card 6Pin Without Post

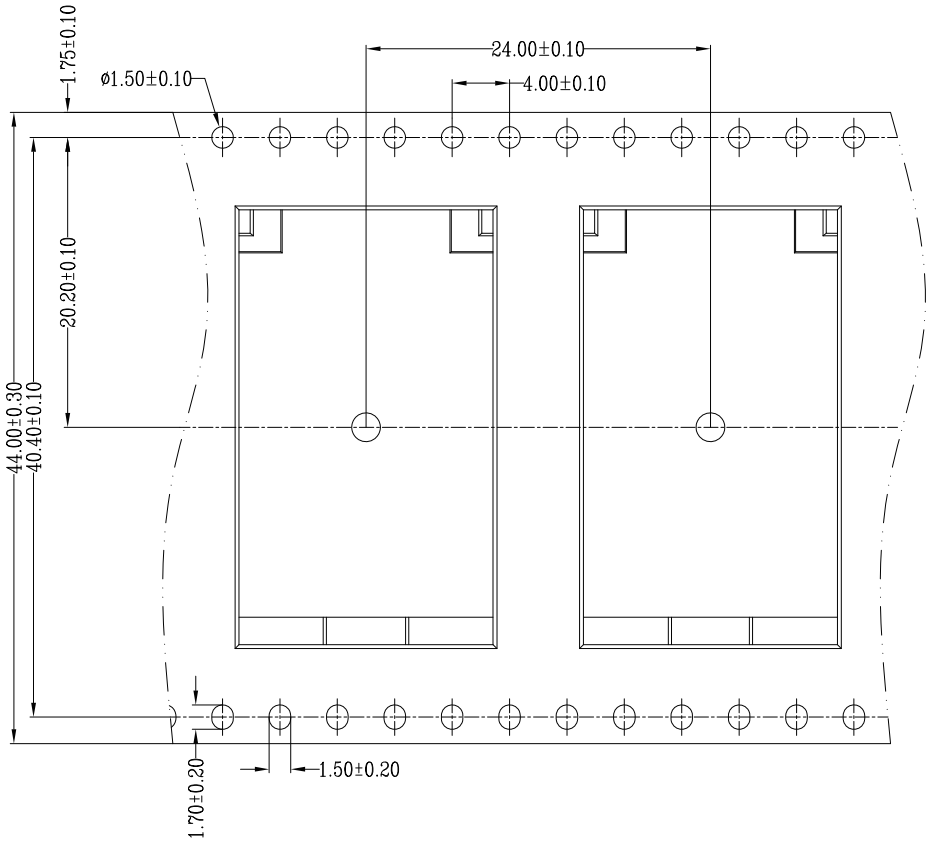

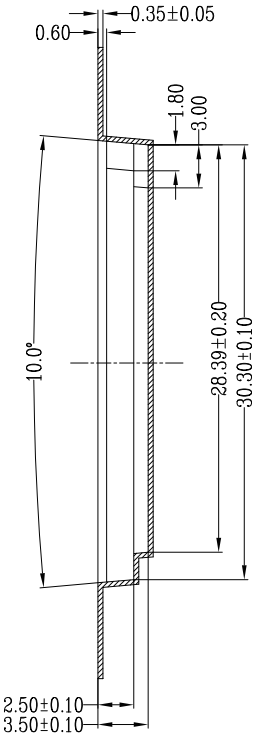

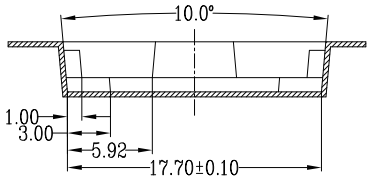


附注：1.材質：PS；
2.卷盤顏色：藍色(ø330mm)；
3.單卷可裝長度：16.2M；
4.單卷可裝產品：650PCS；
5.脫模斜度：5°；

RoHS Compliant

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES
煜倫股份有限公司
www.morethanall.com

DRAWING BY CY		TOLERANCES ARE
CHECKED BY GENIUS		X. ±
UNIT / mm	SCALE 1 : 1	.X ± 0.20
DATE		.XX ± 0.10
SIZE A4	PPOJECTION	.XXX ±
		ANG ±



ORDER INFORMATION

SCV-W2523XR-06-LF

SERIES
90°SMT
REEL
06WAY
LEADFREE
PAD TO PAD 25.2mm
NON POST
BODY HIGH 2.3mm

DESCRIPTION: Sim Card 6Pin Without Post