APPROVAL SHEET

MULTILAYER CERAMIC CAPACITORS

Safety Certified X1/Y2, S2 Series

1808 to 2220 Sizes

NP0 & X7R Dielectrics

Halogen Free & RoHS Compliance

PSA PASSIVE SYSTEM ALLIANCE
Walsin Technology Corporation
COPYRIGHT © WALSIN TECHNOLOGY CORPORATION. ALL RIGHTS RESERVED.

*Contents in this sheet are subject to change without prior notice.

Copyright © by Walsin Technology Corporation. | All rights reserved.

1. DESCRIPTION

WTC's SAFETY CERTIFIED CAPACITORS are designed for surge or lightning immunity in modem facsimile and other equipments. The capacitors of series S2 are class X1/Y2 compliant respectively.

The green type capacitors in S2 and S3 series are manufactured by using environmentally friendly materials without lead or cadmium.

The terminations are composed of plated nickel and pure tin to feature the superior leaching resistance during soldering.

2. FEATURES

a. High reliability and stability.
b. Small size and high capacitance
c. RoHS compliant
d. Safety standard approval by
   EN 60384-14 : 2013
   IEC 60384-14 : 2013
   UL 60384-14 (Ed 2.0)
e. Certificate number:
   TUV: R50195920, TUV: R50381780
   UL: E182369
f. HALOGEN compliant.

3. APPLICATIONS

a. Modem.
b. Facsimile.
c. Telephone.
d. Other electronic equipment for lighting or surge protection and isolation





版權所有 侵害必究
Walsin Technology Corporation
COPYRIGHT © WALSIN ALL RIGHTS RESERVED.

4. HOW TO ORDER

S2	42	N	100	J	502	C	T
Series	**Size**	**Dielectric**	**Capacitance**	**Tolerance**	**Impulse voltage**	**Termination**	**Packaging**
S2=X1/Y2 Safety Certified	**42**=1808 (4520) **43**=1812 (4532) **52**=2211 (5728) **55**=2220 (5750)	**N**=NP0 **B**=X7R	Two significant digits followed by no. of zeros. And R is in place of decimal point. eg.: 0R5=0.5pF 1R0=1.0pF 100=10x10^0 =10pF	**D**= ±0.5pF **F**= ±1.0% **G**= ±2.0% **J**= ±5.0% **K**= ±10% **M**= ±20%	Two significant digits followed by no. of zeros. And R is in place of decimal point. **502:** 5000V Impulse Voltage **602:** 6000V Impulse Voltage	**C**=Cu/Ni/Sn **E**=Cu+Conductive resin /Ni /Sn	**T**=7" reeled **G**=13" reeled

Copyright © by Walsin Technology Corporation. | All rights reserved.

5. EXTERNAL DIMENSIONS & STRUCTURE

5-1 Safety certified Caps.

Size Inch (mm)	L (mm)	W (mm)	T (mm)	M_B (mm)
1808 (4520)	4.50 +0.5/-0.3	2.00±0.25	1.25±0.10 (D) 1.40±0.15 (F) 1.60±0.20 (G) 2.00±0.20 (K) 2.50±0.30 (M) 2.80±0.30 (U)	0.50±0.25
1812 (4532)	4.50 +0.5/-0.3	3.20±0.40		0.50±0.25
2211 (5728)	5.70±0.40	2.80±0.30		0.60±0.30
2220 (5750)	5.70±0.40	5.00±0.40		0.60±0.30

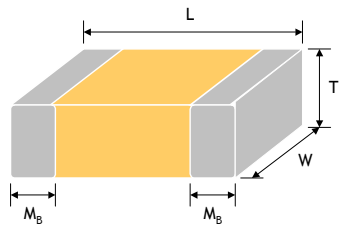

Fig. 1 The outline of MLCC

5-2 Safety certified Caps. with soft termination

Size Inch (mm)	L (mm)	W (mm)	T (mm)	M_B (mm)
1808 (4520)	4.50 +0.6/-0.3	2.00±0.30	1.25±0.10 (D) 1.40±0.15 (F) 1.60±0.20 (G) 2.00±0.20 (K) 2.50±0.30 (M) 2.80±0.30 (U)	0.50±0.25
1812 (4532)	4.50 +0.6/-0.3	3.20±0.40		0.50±0.25
2211 (5728)	5.70±0.50	2.80±0.40		0.60±0.30
2220 (5750)	5.70±0.50	5.00±0.50		0.60±0.30

Reflow soldering only is recommended

6. GENERAL ELECTRICAL DATA

Dielectric	NP0	X7R
Size	1808, 1812, 2211	1808, 1812, 2211, 2220
Capacitance	3pF to 680pF	100pF to 4700pF
Capacitance tolerance	Cap.<10pF: D (±0.5pF) Cap.≥10pF: F (±1%), G (±2%), J (±5%), K (±10%), M (±20%)	J (±5%), K (±10%), M (±20%)
Rated voltage (WVAC)	250Vac	
Q/ DF(Tan δ)	Cap<30pF: Q≥400+20C Cap≥30pF: Q≥1000	DF≤2.5%
Insulation resistance at Ur	≥10GΩ	
Peak impulse voltage	5000V ~ 6000V	
Operating temperature	-55 to +125℃	
Capacitance characteristic	±30ppm/℃	±15%
Termination	Ni/Sn (lead-free termination)	
Certified number	TUV: R50195920, TUV: R50381780, UL: E182369	
Test standard	EN 60384-14 : 2013, IEC 60384-14 : 2013, UL 60384-14 (Ed 2.0)	

* NP0: Apply 1.0±0.2Vrms, 1.0MHz±10% for Cap≤1000pF and 1.0±0.2Vrms, 1.0kHz±10% for Cap>1000pF, at 25℃ ambient temperature.
* X7R: Apply 1.0±0.2Vrms, 1.0kHz±10%, at 25℃ ambie nt temperature.

7. PACKAGE DIMENSION AND QUANTITY

Size	Thickness (mm)/Symbol		Plastic tape	
			7" reel	13" reel
1808 (4520)	1.40±0.15	F	2k	-
	1.60±0.20	G	2k	8k
	2.00±0.20	K	1k	6k
1812 (4532)	1.25±0.10	D	1k	-
	1.60±0.20	G	1k	
	2.00±0.20	K	1k	-
	2.50±0.30	M	0.5k	3k
2211 (5728)	1.60±0.20	G	1k	-
	2.00±0.20	K	1k	-
	2.50±0.30	M	0.5k	-
	2.80±0.30	U	0.5k	-
2220 (5750)	2.00±0.20	K	1k	-
	2.50±0.30	M	0.5k	2k

Unit: pieces

Copyright © by Walsin Technology Corporation. | All rights reserved.

8. CAPACITANCE RANGE

DIELECTRIC		NP0							
SIZE		1808		1812		2211		2211	
PEAK IMPULSE VOLTAGE		5000						6000	
Certificated		TUV IEC60384-14	UL 60384	TUV IEC60384-14	UL 60384	TUV IEC60384-14	UL 60384	TUV IEC60384-14	UL 60384
Capacitance	3.0pF (3R0)	F	F						
	3.3pF (3R3)	F	F						
	3.9pF (3R9)	F	F						
	4.0pF (4R0)	F	F			K	K	K	K
	4.7pF (4R7)	F	F			K	K	K	K
	5.0pF (5R0)	F	F			K	K	K	K
	5.6pF (5R6)	F	F			K	K	K	K
	6.0pF (6R0)	F	F			K	K	K	K
	6.8pF (6R8)	F	F			K	K	K	K
	7.0pF (7R0)	F	F			K	K	K	K
	8.0pF (8R0)	F	F			K	K	K	K
	8.2pF (8R2)	F	F			K	K	K	K
	9.0pF (9R0)	F	F				K		K
	10pF (100)	F	F	D	D	K	K	K	K
	12pF (120)	F	F	D	D	K	K	K	K
	15pF (150)	F	F	D	D	K	K	K	K
	18pF (180)	F	F	D	D	K	K	K	K
	22pF (220)	F	F	D	D	K	K	K	K
	27pF (270)	F	F	D	D	K	K	K	K
	33pF (330)	F	F	D	D	K	K	K	K
	39pF (390)	G	G	D	D	K	K	K	K
	47pF (470)	G	G	D	D	K	K	K	K
	56pF (560)	G	G	D	D	K	K	K	K
	68pF (680)	G	G	D	D	K	K	M	M
	82pF (820)	G	G	D	D	K	K	M	M
	100pF (101)	K	K	D	D	K	K	U	U
	120pF (121)	K	K	D	D	M	M		
	130pF (131)	K	K	D	D		M		
	150pF (151)	K	K	D	D	M	M		
	160pF (161)	K	K	D	D	M	M		
	180pF (181)	K	K	D	D	M	M		
	220pF (221)	K	K	K	K	M	M		
	270pF (271)	K	K	K	K	M	M		
	300pF (301)			K	K		M		
	330pF (331)			K	K	M	M		
	390pF (391)			K	K	M	M		
	470pF (471)			K	K	M	M		
	560pF (561)					M	M		
	680pF (681)					M	M		
	720pF (721)								

1. The letter in cell is expressed the symbol of product thickness.
2. For more information about products with special capacitance or other data, please contact WTC local representative.

Copyright © by Walsin Technology Corporation. | All rights reserved.

DIELECTRIC		X7R							
SIZE		1808		1812		2211		2220	
PEAK IMPULSE VOLTAGE		5000							
Certificated		TUV IEC60384-14	UL 60384	TUV IEC60384-14	UL 60384	TUV IEC60384-14	UL 60384	TUV IEC60384-14	UL 60384
Capacitance	100pF (101)	G	G			G	G		
	120pF (121)	G	G			G	G		
	130pF (131)		G			G	G		
	150pF (151)	G	G	G	G	G	G		
	160pF (161)		G		G		G	K	K
	180pF (181)	G	G	G	G	G	G	K	K
	220pF (221)	G	G	G	G	G	G	K	K
	270pF (271)	K	K	G	G	G	G	K	K
	300pF (301)		K		G		G		K
	330pF (331)	K	K	G	G	G	G	K	K
	390pF (391)	K	K	G	G	G	G	K	K
	470pF (471)	K	K	G	G	K	K	K	K
	560pF (561)	K	K	G	G	K	K	K	K
	680pF (681)	K	K	K	K	K	K	K	K
	720pF (721)		K		K		K	K	K
	820pF (821)	K	K	K	K	K	K	K	K
	1,000pF (102)	K	K	M	M	M	M	K	K
	1,200pF (122)					M	M	M	M
	1,500pF (152)					M	M	M	M
	1,800pF (182)					M	M	M	M
	2,200pF (222)					M	M	M	M
	2,700pF (272)					U	U	M	M
	3,300pF (332)							M	M
	3,900pF (392)							M	M
	4,700pF (472)							M	M

1. The letter in cell is expressed the symbol of product thickness.
2. For more information about products with special capacitance or other data, please contact WTC local representative.

PSA PASSIVE SYSTEM ALLIANCE
Walsin Technology Corporation
COPYRIGHT © WALSIN TECHNOLOGY CORPORATION. ALL RIGHTS RESERVED.

Copyright © by Walsin Technology Corporation. | All rights reserved.

9. RELIABILITY TEST CONDITIONS AND REQUIREMENTS

<table>
<tr><th>No.</th><th>Item</th><th>Standard Method</th><th>Test Condition</th><th>Requirements</th></tr>
<tr><td>1.</td><td>Visual examination and Dimensions</td><td>IEC 60384-1 4.1</td><td></td><td>* No remarkable defect.
* Dimensions to confirm to individual specification sheet.</td></tr>
<tr><td>2.</td><td>Capacitance</td><td>IEC 60384-1 4.2.2</td><td>* Class I : (C0G)
Cap.≤1000pF, 1.0±0.2Vrms, 1MHz±10%.
Cap.>1000pF, 1.0±0.2Vrms, 1KHz±10%.</td><td>* Capacitance is within specified tolerance.
* C_R means rated capacitance for conform to the E6 series of preferred values given in IEC 60063.</td></tr>
<tr><td>3.</td><td>D.F. (Dissipation Factor) Tangent of loos angle</td><td>IEC 60384-1 4.2.3</td><td>* Class II : (X7R)
1.0±0.2Vrms, 1KHz±10%.</td><td><table><tr><th>Dielectric</th><th>Q/D.F.</th><th>Remark</th></tr><tr><td rowspan="2">Class I (C0G)</td><td>Q≥1000</td><td>Cap.≥30pF</td></tr><tr><td>Q≥400+20C</td><td>Cap.<30pF</td></tr><tr><td>Class II (X7R)</td><td>D.F.≤2.5%</td><td></td></tr></table></td></tr>
<tr><td>4.</td><td>Temperature Coefficient</td><td>IEC 60384-21/22 4.6</td><td>With no electrical load.<table><tr><th>T.C.</th><th>Operating Temp</th></tr><tr><td>C0G(NP0)</td><td>-55~125℃ at 25℃</td></tr><tr><td>X7R</td><td>-55~125℃ at 25℃</td></tr></table></td><td><table><tr><th>T.C.</th><th>Capacitance Change</th></tr><tr><td>C0G(NP0)</td><td>Within ±30ppm/℃</td></tr><tr><td>X7R</td><td>Within ±15%</td></tr></table></td></tr>
<tr><td>5.</td><td>Voltage proof (Dielectric Strength)</td><td>IEC 60384-14 4.2.1</td><td>* To apply voltage :
X Capacitor : 1075Vdc (4.3U_R).
Y Capacitor : 1500Vac.
* Duration : 60 sec.
* The charge current shall not exceed 0.05A.
* The voltage shall be raised from the near zero to the test voltage a rate not exceeding 150V(r.m.s.)/sec.</td><td>* No evidence of damage or flash over during test.</td></tr>
<tr><td>6.</td><td>Insulation Resistance</td><td>IEC 60384-21/22 4.5.3</td><td><table><tr><th>Rated Vol.(V)</th><th>Apply Voltage</th><th>Charge Current</th><th>Charge Time</th></tr><tr><td>>500</td><td>500Vdc</td><td>≤50mA</td><td>60 sec.</td></tr></table></td><td><table><tr><th>Dielectric</th><th>Requirements</th></tr><tr><td>Class I (C0G)</td><td>≥100GΩ or RxC≥1000Ω-F, whichever is smaller</td></tr><tr><td>Class II (X7R)</td><td>≥10GΩ or RxC≥500Ω-F, whichever is smaller</td></tr></table></td></tr>
<tr><td>7.</td><td>Solderability</td><td>IEC 60384-21/22 4.10</td><td>* Solder temperature: 235±5℃(0201~1210).
* Solder temperature: 245±5℃(1808~2225).
* Dipping time : 2±0.5 sec.</td><td>* 75% min. coverage of all metalized area.</td></tr>
<tr><td>8.</td><td>Resistance to Soldering Heat</td><td>IEC 60384-14 4.4
IEC 60384-21/22 4.9</td><td>* Solder temperature : 260±5℃.
* Dipping time : 10±1 sec.
* Preheating : 120 to 150℃ for 1 minute before immerse the capacitor in a eutectic solder.
* Measurement to be made after keeping at room temperature for 24±2 hrs.</td><td><table><tr><th>Dielectric</th><th>I.R.</th><th>Cap. Change</th><th>Q/D.F.</th></tr><tr><td>Class I (C0G)</td><td>≥1GΩ</td><td>Within ±2.5% or ±0.25pF, whichever is larger</td><td rowspan="2">≤100% of initial requirement</td></tr><tr><td>Class II (X7R)</td><td>≥1GΩ</td><td>Within ±7.5%</td></tr></table></td></tr>
<tr><td>9.</td><td>Temperature Cycle</td><td>IEC 60384-21/22 4.11</td><td>* Conduct the five cycles according to the temperatures and time.<table><tr><th>Step</th><th>Temp.(℃)</th><th>Time(min.)</th></tr><tr><td>1</td><td>Min. operating temp. +0/-3</td><td>30±3</td></tr><tr><td>2</td><td>Room temp.</td><td>2~3</td></tr><tr><td>3</td><td>Max.operating temp. +3/-0</td><td>30±3</td></tr><tr><td>4</td><td>Room temp.</td><td>2~3</td></tr></table>* Measurement to be made after keeping at room temperature for 24±2 hrs.</td><td><table><tr><th>Dielectric</th><th>I.R.</th><th>Cap. Change</th><th>Q/D.F.</th></tr><tr><td>Class I (C0G)</td><td rowspan="2">To meet initial require ment</td><td>Within ±2.5% or ±0.25pF, whichever is larger</td><td>≤1.0(Q) × initial requirement</td></tr><tr><td>Class II (X7R)</td><td>Within ±7.5%</td><td>≤1.5(D.F.) × initial requirement</td></tr></table></td></tr>
</table>

Copyright © by Walsin Technology Corporation. | All rights reserved.

<table>
<tr><th>No.</th><th>Item</th><th>Standard Method</th><th>Test Condition</th><th>Requirements</th></tr>
<tr><td>10.</td><td>Humidity (Damp Heat) Steady State</td><td>IEC 60384-14 4.12</td><td>* Test temp. : 40±2℃.
* Humidity : 90~95% RH.
* Test time : 500 +24/-0hrs.
* Applied voltage : 250Vac.
* Measurement to be made after keeping at room temp. for 24±2 hrs (Class I) and 48±4 hrs (Class II).</td><td>* No remarkable damage.
<table>
<tr><th>Dielectric</th><th>I.R.</th><th>Cap. Change</th><th>Q/D.F.</th></tr>
<tr><td>Class I (C0G)</td><td rowspan="2">≥1GΩ or RxC≥ 25Ω-F, whichever is smaller</td><td>Within ±3.0% or ±2pF, whichever is larger</td><td>≤0.25%</td></tr>
<tr><td>Class II (X7R)</td><td>Within ±15%</td><td>≤2.0(D.F.) × initial requirement</td></tr>
</table></td></tr>
<tr><td>11.</td><td>Passive Flammability</td><td>IEC 60384-14 4.17
IEC 60384-1 4.38</td><td>* Volume sample: 21.56 mm^3
* Flame exposure time: 5 sec Max.
* Category of flammability : C.</td><td>* Capacitor didn’t burn at all.</td></tr>
<tr><td>12.</td><td>Active Flammability</td><td>IEC 60384-21/22 4.18</td><td>* The capacitors applied UR (250Vac). Then each sample shall be subjected to 20 discharges from a tank capacitor, charge to a voltage that, when discharged, plase Ui 2500V for X1Y2 across the capacitor under test. The interval between successive discharges shall be 5 sec.</td><td>* The cheese cloth shall not burn with a flame.</td></tr>
<tr><td>13.</td><td>High Temperature Load (Endurance)</td><td>IEC 60384-14 4.14</td><td>* Impulse Voltage :
Each individual capacitor shall be subjected to a Vp = 5.0KV (X1Y2 Class Impulse 5KV) & Vp = 6.0KV (X1Y2 Class Impulse 6KV) impulse for three times before applied to endurance test.
* Test temp. : 125±3℃.
* Test time: 1000 +48/-0 hrs.
* Applied voltage :
X capacitor: 1.25UR (312.5Vac).
Y capacitor: 1.70UR (425Vac).
Once every hour the voltage shall be increased to 1000Vrms for 0.1 sec.
* Measurement to be made after keeping at room temp. for 24±2 hrs (Class I) and 48±4 hrs (Class II).</td><td>* Appearance :
No mechanical damage.
* Cap. change :
C0G within ±5% or ±0.5pF, whichever is larger.
X7R within ±20%.
* D.F. value :
C0G≤0.25%.
X7R≤5.0%.
* I.R.≥1GΩ.
* Dielectric strength satisfies the specified initial value.</td></tr>
<tr><td>14.</td><td>Resistance to Flexure of Substrate</td><td>IEC 60384-21/22 4.8</td><td>* Capacitors mounted on a substrate. The board shall be bent 1mm with a rate of 1mm/sec.
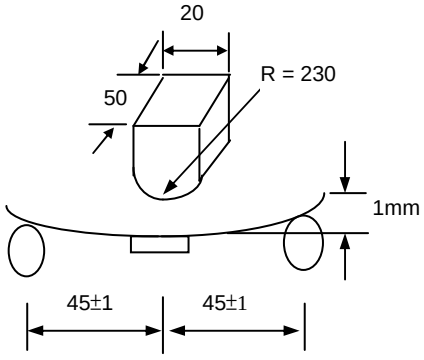
</td><td>* No remarkable damage.
<table>
<tr><th>Dielectric</th><th>Cap. Change</th></tr>
<tr><td>Class I (C0G)</td><td>Within ±3.0% or ±2pF, whichever is larger</td></tr>
<tr><td>Class II (X7R)</td><td>Within ±12.5%</td></tr>
</table>
(This capacitance change means the change of capacitance under specified flexure of substrate from the capacitance measured before the test)</td></tr>
</table>

Copyright © by Walsin Technology Corporation. | All rights reserved.

No.	Item	Standard Method	Test Condition	Requirements
15.	**Adhesive Strength of Termination**	IEC 60384-21/22 4.15 IEC 60384-1 4.13	* Capacitors mounted on a substrate. A force of 10N applied perpendicular to the place of substrate and parallel the line joining the center of terminations for 10±1 sec. 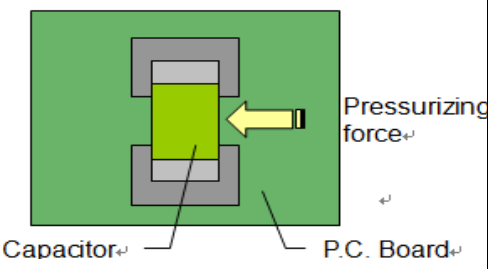 	* No remarkable damage or removal of the terminations.
16.	**Vibration**	IEC 60384-1 4.17	* Reflow solder the capacitors on P. C. Board before test. * Vibration frequency : 10~55 Hz/min. * Total amplitude : 1.5mm. * Repeat the conditions for 2 hours each in 3 perpendicular directions.	* No remarkable damage. * Cap. change and Q/D.F. : To meet initial spec.
17.	**Impulse Voltage**	IEC 60384-14 4.13	* X1 : 4.0KV * Y2 : 5.0KV. * Number of impulse : 24 max.	* There shall be no permanent breakdown or flashover.

PSA PASSIVE SYSTEM ALLIANCE
Walsin Technology Corporation
COPYRIGHT © WALSIN TECHNOLOGY CORPORATION. ALL RIGHTS RESERVED.

Copyright © by Walsin Technology Corporation. | All rights reserved.

EMBOSSED TAPE DIMENSIONS

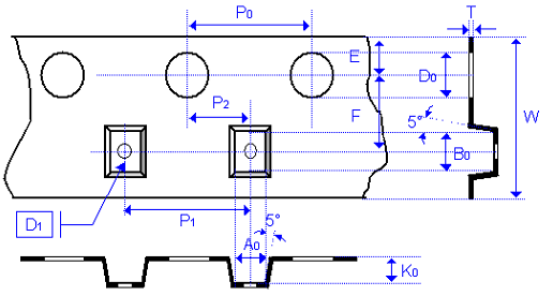

Fig. 2 The dimension of plastic tape

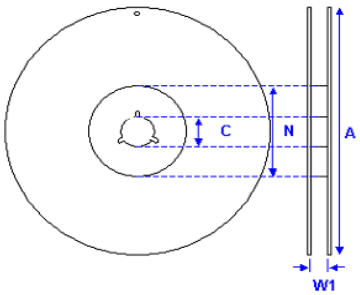

Fig. 3 The dimension of reel

Size	1808		1812		2211		2220	
Chip Thickness	1.25±0.10 1.40±0.15 1.60±0.20	2.00±0.20	1.25±0.10 1.60±0.20 2.00±0.20	2.50±0.30	1.60±0.20 2.00±0.20	2.50±0.30 2.80±0.30	2.00±0.20	2.50±0.30
A_0	<2.50	<2.50	<3.90	<3.90	<3.30	<3.30	<5.80	<5.80
B_0	<5.30	<5.30	<5.30	<5.30	<6.50	<6.50	<6.50	<6.50
T	0.25±0.10	0.25±0.10	0.25±0.10	0.25±0.10	0.30±0.10	0.30±0.10	0.30±0.10	0.30±0.10
K_0	<2.50	<2.50	<2.50	<3.50	<2.50	<3.50	<2.50	<3.50
W	12.0±0.30	12.0±0.30	12.0±0.30	12.0±0.30	12.0±0.30	12.0±0.30	12.0±0.30	12.0±0.30
P_0	4.00±0.10	4.00±0.10	4.00±0.10	4.00±0.10	4.00±0.10	4.00±0.10	4.00±0.10	4.00±0.10
$10xP_0$	40.0±0.20	40.0±0.20	40.00±0.20	40.00±0.20	40.0±0.20	40.0±0.20	40.00±0.20	40.00±0.20
P_1	4.00±0.10	4.00±0.10	8.00±0.10	8.00±0.10	8.00±0.10	8.00±0.10	8.00±0.10	8.00±0.10
P_2	2.00±0.10	2.00±0.10	2.00±0.10	2.00±0.10	2.00±0.10	2.00±0.10	2.00±0.10	2.00±0.10
D_0	1.50+0.10/-0	1.50+0.10/-0	1.50+0.10/-0	1.50+0.10/-0	1.50+0.10/-0	1.50+0.10/-0	1.50+0.10/-0	1.50+0.10/-0
D_1	1.50±0.10	1.50±0.10	1.50±0.10	1.50±0.10	1.50±0.10	1.50±0.10	1.50±0.10	1.50±0.10
E	1.75±0.10	1.75±0.10	1.75±0.10	1.75±0.10	1.75±0.10	1.75±0.10	1.75±0.10	1.75±0.10
F	5.50±0.10	5.50±0.10	5.50±0.10	5.50±0.10	5.50±0.10	5.50±0.10	5.50±0.10	5.50±0.10

Size	1808, 1812, 2211, 2220	
Reel size	7”	13”
C	13.0+0.5/-0.2	13.0+0.5/-0.2
W_1	12.4+2.0/-0	12.4+2.0/-0
A	178.0±1.0	330.0±1.0
N	60.0+1.0/-0	100±1.0

Copyright © by Walsin Technology Corporation. | All rights reserved.

APPLICATION NOTES

◙ Storage

To prevent the damage of solderability of terminations, the following storage conditions are recommended:

Indoors under 5 ~ 40℃ and 20% ~ 70% RH.

No harmful gases containing sulfuric acid, ammonia, hydrogen sulfide or chlorine.

Packaging should not be opened until the capacitors are required for use. If opened, the pack should be re-sealed as soon as is practicable. Taped product should be stored out of direct sunlight, which might promote deterioration in tape or adhesion performance. The product is recommended to be used within 12 months after shipment and checked the solderability before use.

◙ Handling

Chip capacitors are dense, hard, brittle, and abrasive materials. They are liable to suffer mechanical damage, in the form of cracks or chips. Chip Capacitors should be handled with care to avoid contamination or damage. To use vacuum or plastic tweezers to pick up or plastic tweezers is recommended for manual placement. Tape and reeled packages are suitable for automatic pick and placement machine.

◙ Preheat

In order to minimize the risk of thermal shock during soldering, a carefully controlled preheat is required. The rate of preheat should not exceed 3℃ per secon d.

◙ Soldering

Use middy activated rosin RA and RMA fluxes do not use activated flux. The amount of solder in each solder joint should be controlled to prevent the damage of chip capacitors caused by the stress between solder, chips, and substrate.

a.) Hand soldering :

Fig. 4.1 Hand Soldering Profile

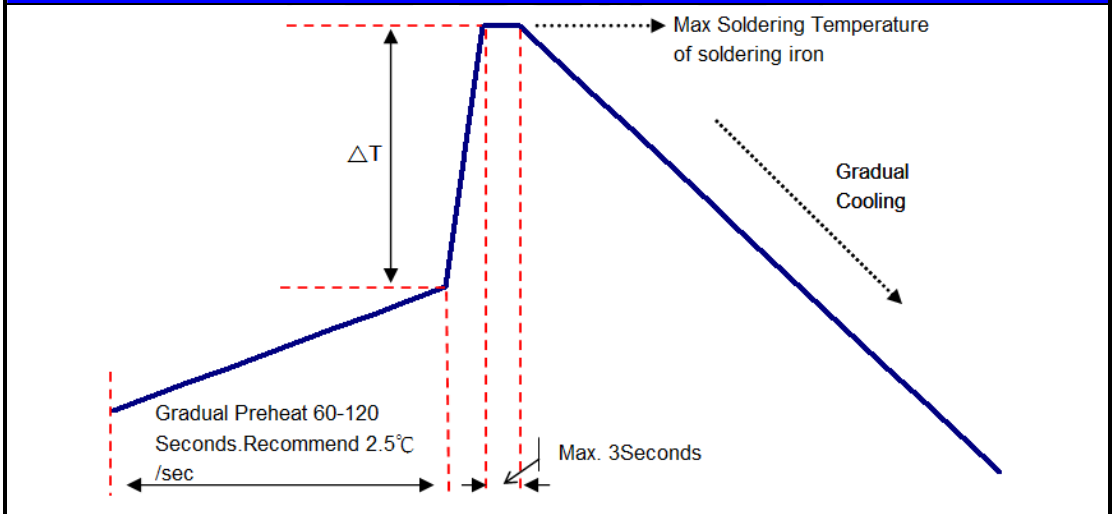

Chip Size	Pre-Heat temp.	ΔT	Max. soldering iron temp.
≤1206	≥150℃	≤150℃	≤350℃
1210~2225	≥150℃	≤130℃	≤280℃

* Soldering iron tip diameter ≤1.0 mm and wattage max. 20W.
* The Capacitors shall be pre-heated and that the temperature gradient between the devices and the tip of the soldering iron.
* The required amount of solder shall be melted on the soldering tip.
* The tip of iron should not contact the ceramic body directly.
* The Capacitors shall be cooled gradually at room temperature after soldering.
* Forced air cooling is not allowed.

Copyright © by Walsin Technology Corporation. | All rights reserved.

b.) Reflow soldering :

Fig. 4.2 Reflow soldering profile

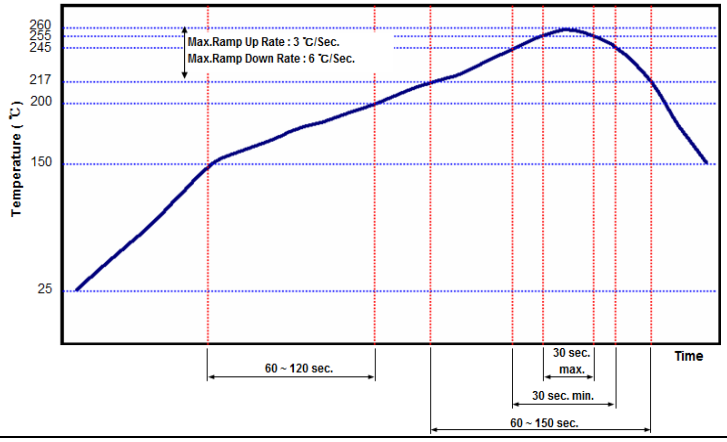

For Sn/Ag/Cu Series solder paste (Pb-Free)

◙ Cooling

After soldering, cool the chips and the substrate gradually to room temperature. Natural cooling in air is recommended to minimize stress in the solder joint.

◙ Cleaning

All flux residues must be removed by using suitable electronic-grade vapor-cleaning solvents to eliminate contamination that could cause electrolytic surface corrosion. Good results can be obtained by using ultrasonic cleaning of the solvent. The choice of the proper system is depends upon many factors such as component mix, flux, and solder paste and assembly method. The ability of the cleaning system to remove flux residues and contamination from under the chips is very important.

Copyright © by Walsin Technology Corporation. | All rights reserved.