


RoHS Compliant 2011/65/EU


端子镀半金雾锡


REV.	ECN NO.	DESCRIPTION	DATE	DESIGN



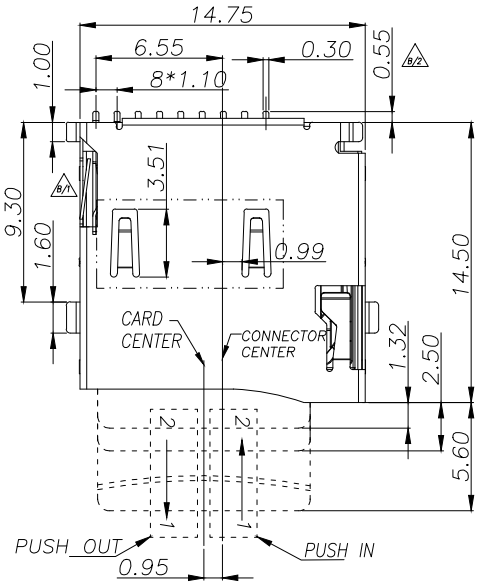


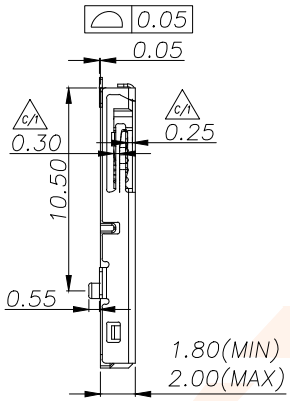





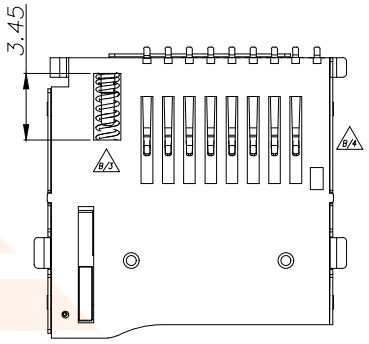


NOTES:
1.MATERIAL:
HOUSING: HIGH TEMPERATURE THERMOPLASTIC UL94V_0,COLOR:BLACK.
CONTACT: COPPER ALLOYS.
COVER: COPPER ALLOYS OR STEEL.
2.PLATING:
UNDERPLATE: NICKEL.
CONTACT AREA: GOLD OVER NICKEL.
SOLDER AREA: TIN OVER NICKEL.
3.MULTIMEDIA CARD COMPATIBLE

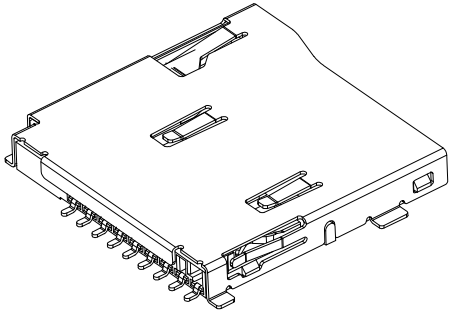

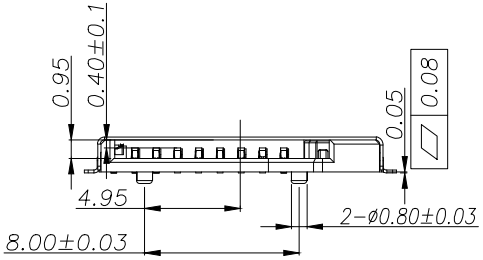

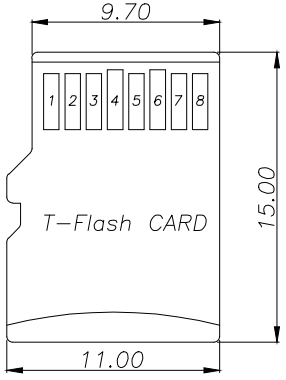

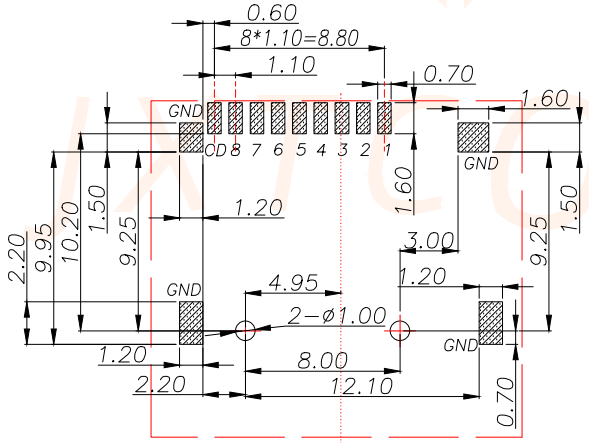

PAD AREA

KEEP OUT AREA

RECOMMENDED PCB LAYOUT

GENERAL TOLERANCE ±0.05

Circuit Diagram for Detect Switch


WITHOUT CARD	OPEN	OPEN CD GND(SHELL)
INSERTING CARD	CLOSE	CLOSE CD GND(SHELL)

TF CARD PIN DEFINE


PIN NO.	NAME	YTPE	DESCRIPTION
1	DAT2	I/O/PP	DATE LINE(BIT2)
2	CD/DAT3	I/O/PP	CARD DETECT DATE LIN(BIT3)
3	CMD	PP	COMMAND RESPONSE
4	VDD	S	SUPPLY VOLTAGE
5	CLX	I	CLOCK
6	VSS	S	SUPPLY VOLTAGE GROUND
7	DATO	I/O/PP	DATE LINE(BITO)
8	DAT1	I/O/PP	DATE LINE(DIT1)

TOLERANCE		深圳聚兴泰电子科技有限公司 Shenzhen Juxingtai Electronic Technology Co., Ltd	
X.X:±0.35	X.X°:±3°	PART NO. TF-015-N	TITLE: MICRO SD CARD PUSH PUSH SMT 不镀金 双压片 外焊
X.XX:±0.25	X.XX°:±2°		
X.XXX:±0.15		DESIGN: Ethan	MANUFACTURE DWG
UNITS	mm	CHED: Olvia	
MATERILA	— — —	APPD: Ava	SCALE N:A / SHEET 1/2
FINISH	— — —		

REV.	ECN NO.	DESCRIPTION	DATE	DESIGN

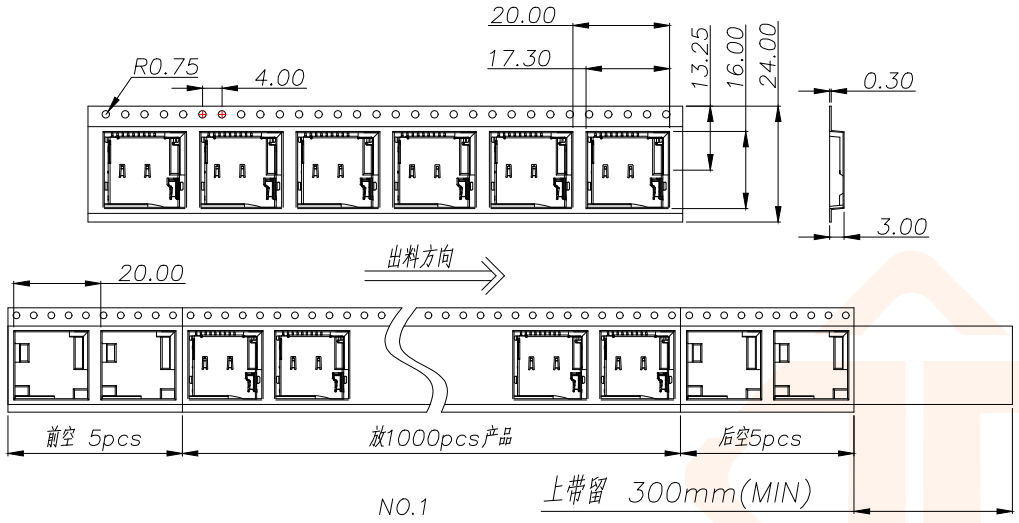

NO.1

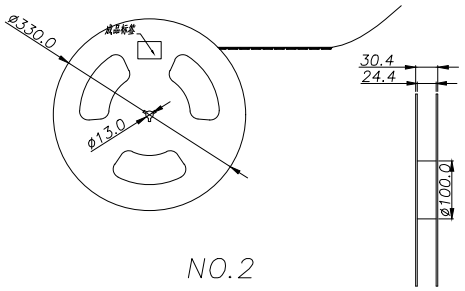

NO.2

1.材质要求:

1.1 纸箱的材质为K=K;外形尺寸为34*34*32.2;

1.2 卷盘的材质为PS,卷盘的外形尺寸为ø330*30.4;


2.包装方式:

2.1 将卷带放入包装机后,前空5PCS,后放产品1000PCS,再后空5PCS;上带留300MM长度。

2.2 将包装好的产品从包装机上取下并包装好,贴上内盘标签;


2.3 把累叠好的7盘叠放入纸箱中共计7Kset,上下放纸板;


2.4 把包装好的成品打包封箱,并在纸箱外贴上标签

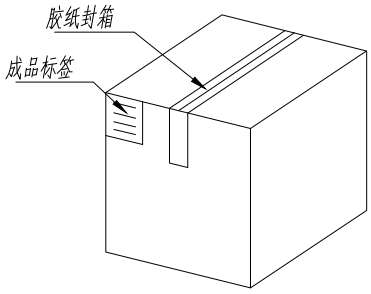

纸箱规格:340*340*322

NO.4



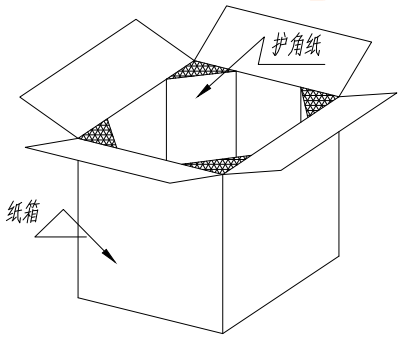

NO.3

TOLERANCE		深圳聚兴泰电子科技有限公司 Shenzhen Juxingtai Electronic Technology Co., Ltd	
X.X:±0.35	X.X°:±3°	PART NO. TF-015-N	TITLE: MICRO SD CARD PUSH PUSH SMT 双压片 外焊 包装图
X.XX:±0.25	X.XX°:±2°		
X.XXX:±0.15		DESIGN: Ethan	MANUFACTURE DWG
UNITS	mm	CHED: Olvia	SCALE N:A / SHEET 2/2
MATERILA	— — —	APPD: Ava	
FINISH	— — —		