CMP130N10/CMB130N10/CMI130N10/CMF130N10

100V, 12mΩ typ., 70A N-Channel MOSFET

General Description

The 130N10 uses advanced SGT technology to provide excellent RDS(ON).These devices are well suited for Synchronous Rectification for Adapter and general purpose applications.

Product Summary

BVDSS	$R_{DS(on)}$ max.	ID
100V	13mΩ	70A


Applications

- Battery managemen
- Synchronous Rectification for AC/DC Quick Charger

Features

- Low On-Resistance
- 100% avalanche tested
- RoHS Compliant

TO-220/263/262/220F Pin Configuration

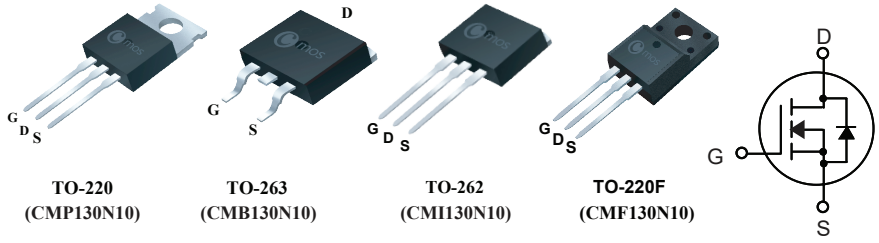

Absolute Maximum Ratings

Symbol	Parameter	220/263/262	220F	Units
V_{DS}	Drain-Source Voltage	100		V
V_{GS}	Gate-Source Voltage	±20		V
I_D@T_C=25℃	Continuous Drain Current	70	70*	A
I_D@T_C=100℃	Continuous Drain Current	49	48*	A
I_{DM}	Pulsed Drain Current	280	280*	A
EAS	Single Pulse Avalanche Energy (Note 1)	160		mJ
P_D@T_C=25℃	Total Power Dissipation	150	35	W
T_{STG}	Storage Temperature Range	-55 to 150		℃
T_J	Operating Junction Temperature Range	-55 to 150		℃

* Drain current limited by maximum junction temperature.

Thermal Data

Symbol	Parameter	220/263/262	220F	Unit
$R_{\theta JA}$	Thermal Resistance Junction-ambient Max.(min. footprint)	62	62	℃/W
$R_{\theta JC}$	Thermal Resistance Junction-case Max.	0.83	3.57	℃/W

100V, 12mΩ typ., 70A N-Channel MOSFET

Electrical Characteristics (T_J=25℃ , unless otherwise noted)

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
BV_{DSS}	Drain-Source Breakdown Voltage	V_{GS}=0V , I_D=250uA	100	---	---	V
$R_{DS(ON)}$	Static Drain-Source On-Resistance	V_{GS}=10V , I_D=20A	---	12	13	mΩ
		V_{GS}=4.5V , I_D=10A	---	15.3	18	
$V_{GS(th)}$	Gate Threshold Voltage	V_{GS}=V_{DS} , I_D =250μA	1	---	3	V
I_{DSS}	Drain-Source Leakage Current	V_{DS}=100V , V_{GS}=0V	---	---	1	uA
I_{GSS}	Gate-Source Leakage Current	V_{GS}= ±20V , V_{DS}=0V	---	---	±100	nA
gfs	Forward Transconductance	V_{DS}=10V , I_D =10A	---	19	---	S
R_g	Gate Resistance	V_{DS}=0V , V_{GS}=0V , f=1MHz	---	3.0	---	Ω
Q_g	Total Gate Charge	V_{DS} =50V , I_D=30A V_{GS}=10V	---	28.2	---	nC
Q_{gs}	Gate-Source Charge		---	6.5	---	
Q_{gd}	Gate-Drain Charge		---	4.5	---	
$T_{d(on)}$	Turn-On Delay Time	V_{DS}=50V R_{G_ext} =2.7Ω , V_{GS}=10V	---	30	---	ns
T_r	Rise Time		---	81	---	
$T_{d(off)}$	Turn-Off Delay Time		---	24	---	
T_f	Fall Time		---	7	---	
C_{iss}	Input Capacitance	V_{DS}=25V , V_{GS}=0V , f=1MHz	---	1100	---	pF
C_{oss}	Output Capacitance		---	520	---	
C_{rss}	Reverse Transfer Capacitance		---	36	---	

Diode Characteristics


Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
I_S	Diode continuous forward current	V_G=V_D=0V , Force Current	---	---	70	A
$I_{S,pulse}$	Diode pulse current		---	---	280	A
V_{SD}	Diode Forward Voltage	V_{GS}=0V , I_F=20A , Tj=25 ℃	---	0.88	1.2	V

Note :


1.The EAS data shows Max. rating .The test condition is V_{DS}=80V , V_{GS}=10V , L=5mH , I_{AS}=8A.

This product has been designed and qualified for the counsumer market.
Cmos assumes no liability for customers' product design or applications.
Cmos reserver the right to improve product design ,functions and reliability wihtout notice.Please refer to the latest version of specification.


Typical Characteristics

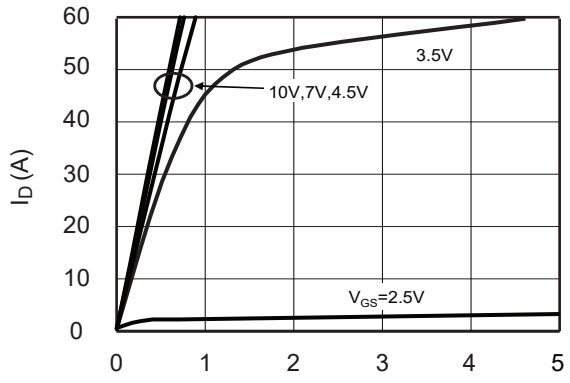


Output Characteristics

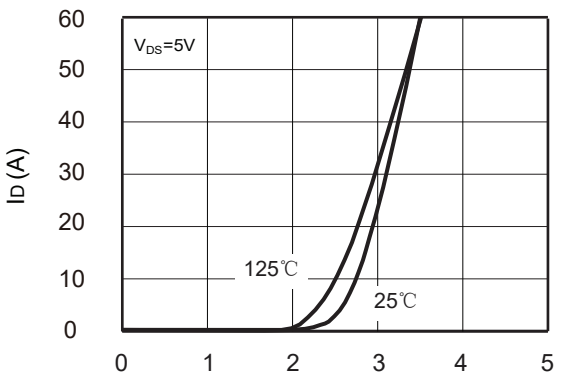


transfer characteristics

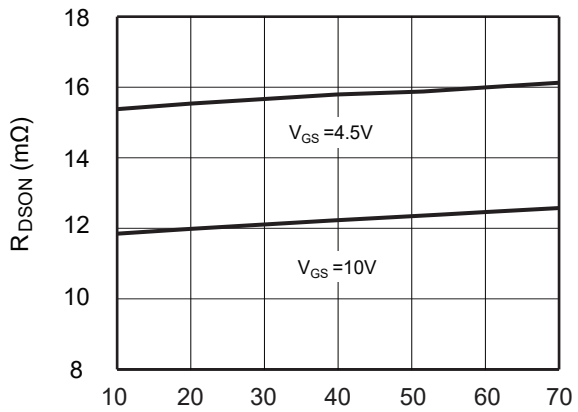


On-Resistance vs. Drain Current

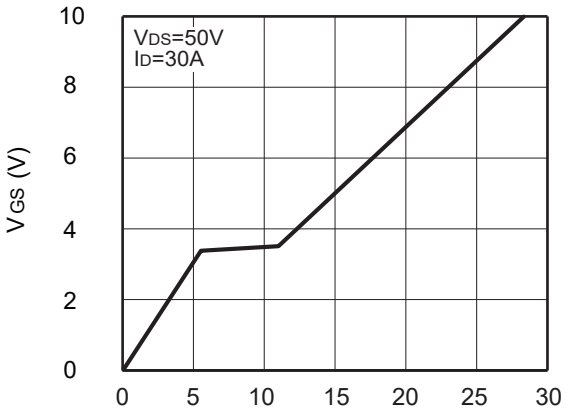

Gate charge vs gate-source voltage

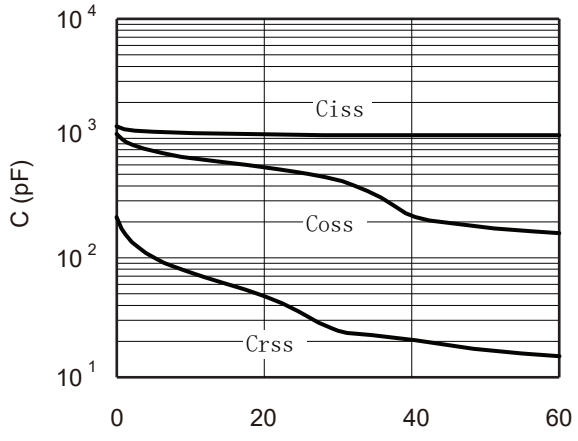


Capacitance Characteristics

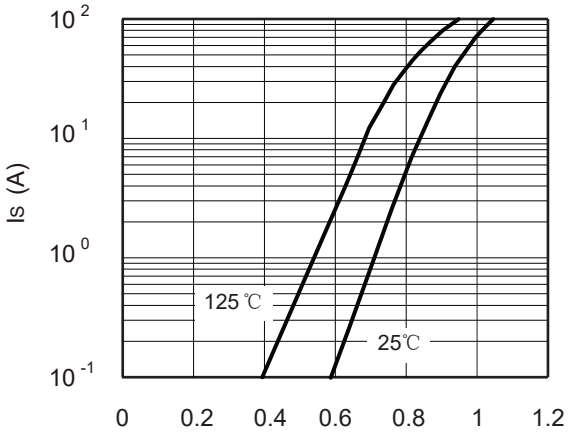

Body-Diode Characteristics

Package Dimension


TO-220 Unit :mm

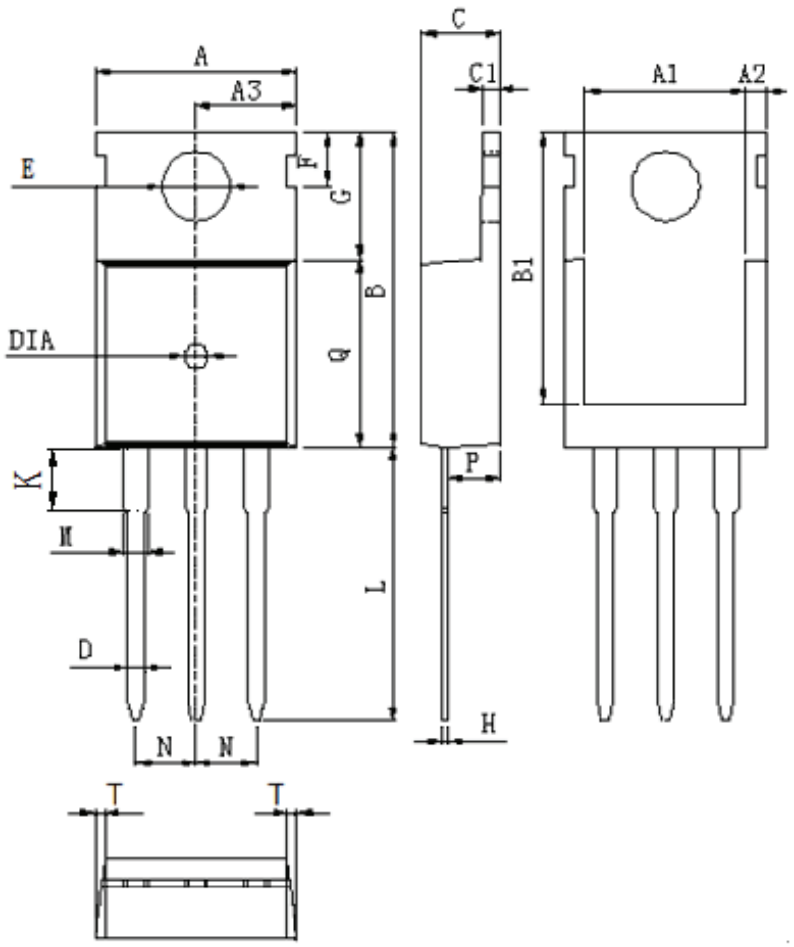

DIM	MILLIMETERS
A	10.0±0.3
A1	8.64±0.2
A2	1.15±0.1
A3	5.0±0.2
B	15.8±0.4
B1	13.2±0.3
C	4.56±0.1
C1	1.3±0.2
D	0.8±0.2
E	3.6±0.2
F	2.95±0.3
G	6.5±0.3
H	0.5±0.1
K	3.1±0.2
L	13.2±0.4
M	1.25±0.1
N	2.54±0.1
P	2.4±0.3
Q	9.0±0.3
T	W:0.35
DIA	⊙1.5(deep 0.2)

Package Dimension


TO-263 Unit :mm

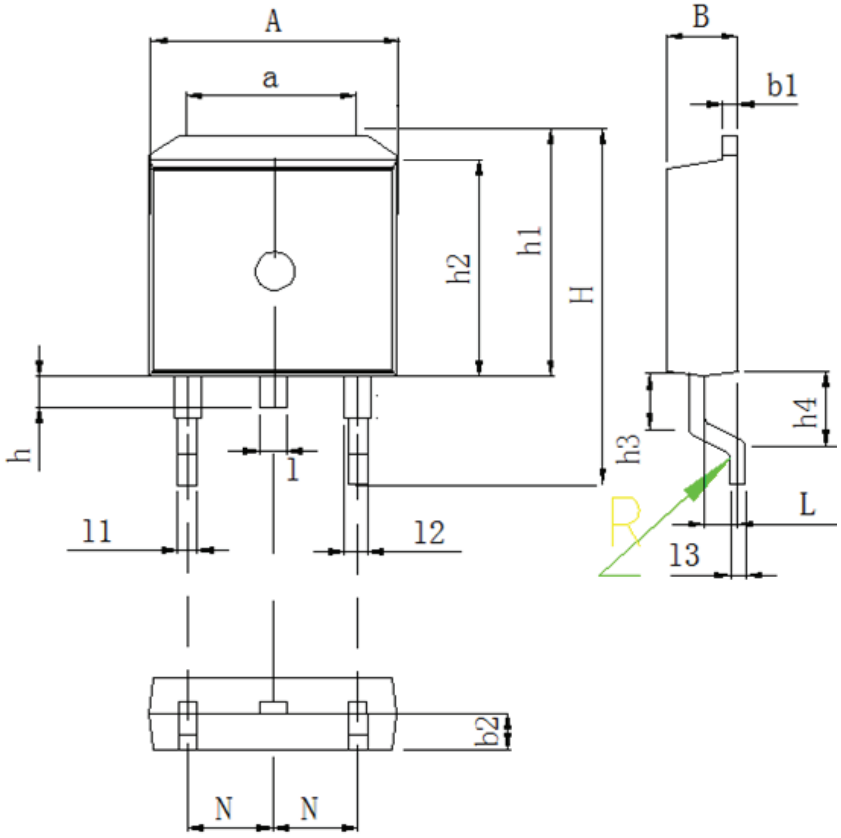

DIM	MILLIMETERS
A	9.8±0.2
a	7.4±0.4
B	4.5±0.2
b1	1.3±0.05
b2	2.4±0.2
H	15.5±0.3
h	1.54±0.2
h1	10.5±0.2
h2	9.2±0.1
h3	1.54±0.2
h4	2.7±0.2
L	2.4±0.2
l	1.3±0.1
l1	0.8±0.1
l2	1.3±0.1
l3	0.5±0.1
N	2.54±0.1
R	0.5R±0.05

Package Dimension


TO-262 Unit :mm

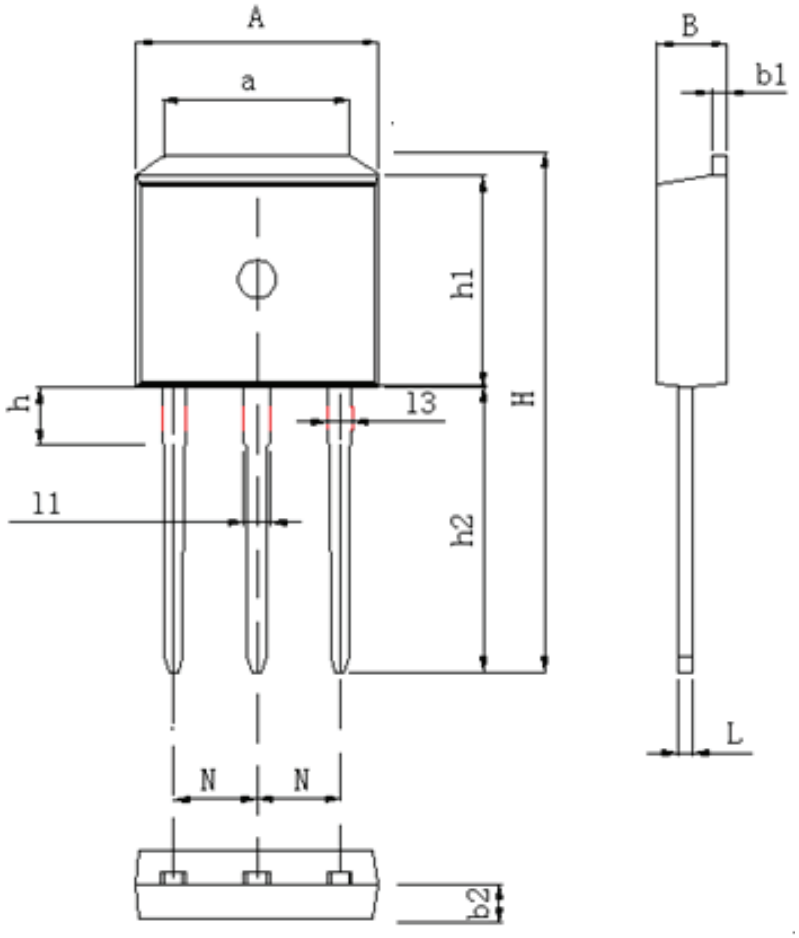

DIM	MILLIMETERS
A	9.98±0.2
a	7.4±0.4
B	4.5±0.2
b1	1.3±0.05
b2	2.4±0.2
H	23.9±0.3
h	3.1±0.2
h1	9.16±0.2
h2	13.2±0.2
L	0.5±0.1
l1	1.3±0.1
l2	0.8±0.1
N	2.45±0.1

Package Dimension

TO-220F Unit :mm

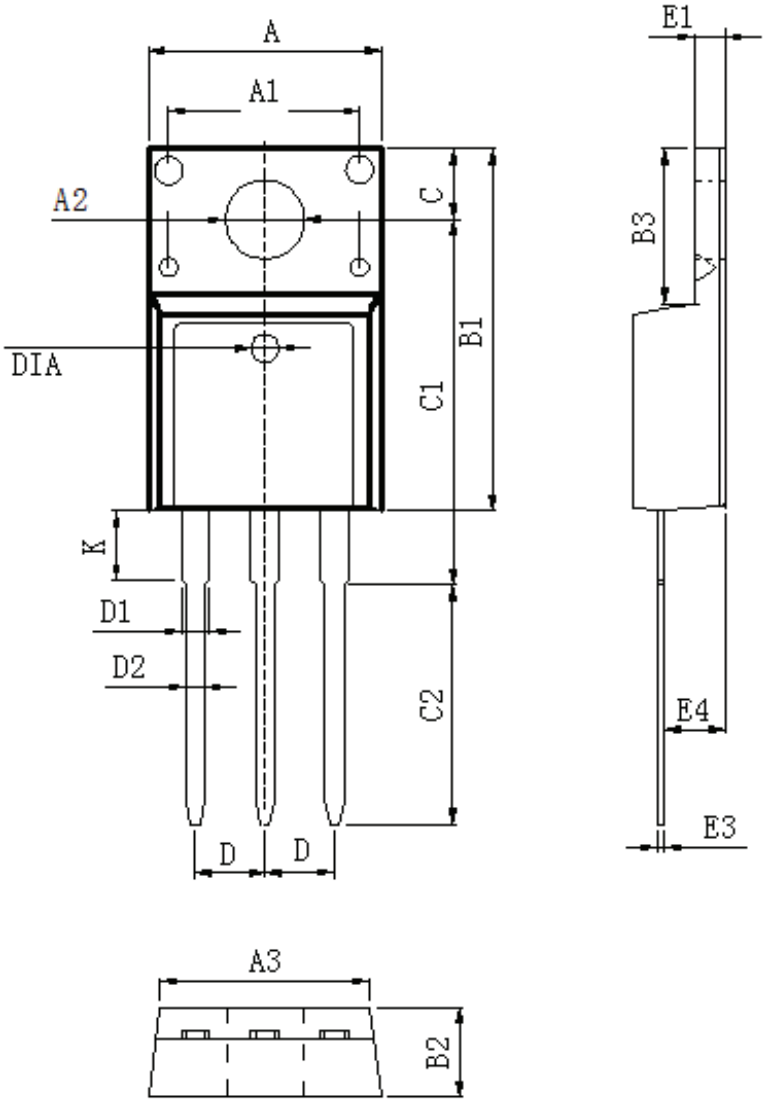

DIM	MILLIMETERS
A	10.16±0.3
A1	7.00±0.1
A2	3.3±0.2
A3	9.5±0.2
B1	15.87±0.3
B2	4.7±0.2
B3	6.68±0.4
C	3.3±0.2
C1	12.57±0.3
C2	10.02±0.5
D	2.54±0.05
D1	1.28±0.2
D2	0.8±0.1
K	3.1±0.3
E1	2.54±0.1
E3	0.5±0.1
E4	2.76±0.2
DIA	⊙1.5(deep 0.2)