RoHs

| VER | MARK | PR. BY | DESCRIPTTON | DATE |
|---|---|---|---|---|
| | | | | |
| | | | | |

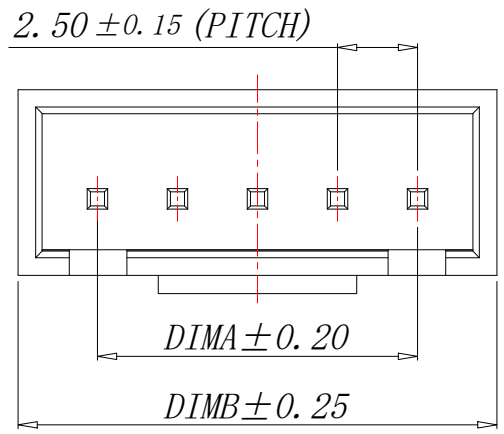


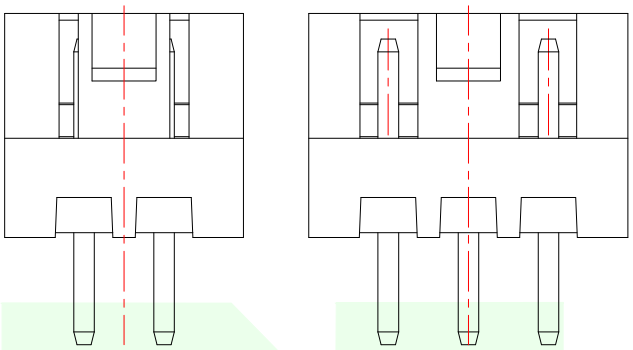


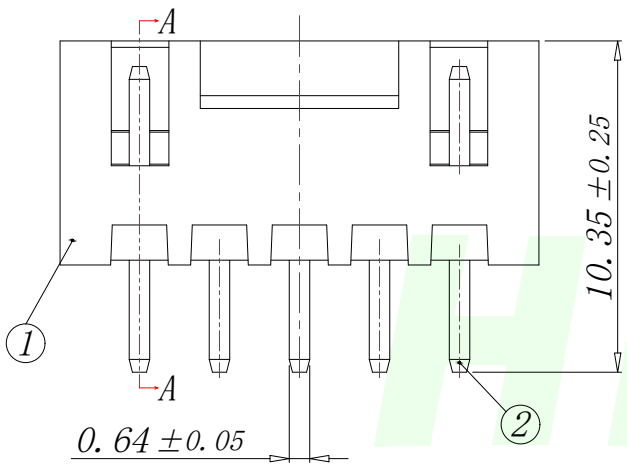


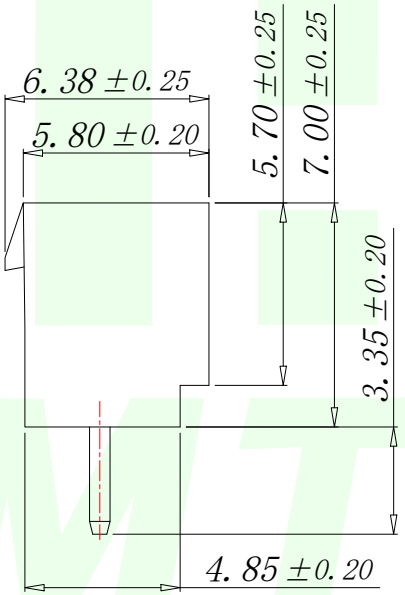





SECTION A-A

| Part No | Pin | A | B |
|---|---|---|---|
| W254111K-2PM2123 | 2 | 2.5 | 7.5 |
| W254111K-3PM2123 | 3 | 5.0 | 10.0 |
| W254111K-4PM2123 | 4 | 7.5 | 12.5 |
| W254111K-5PM2123 | 5 | 10.0 | 15.0 |
| W254111K-6PM2123 | 6 | 12.5 | 17.5 |
| W254111K-7PM2123 | 7 | 15.0 | 20.0 |
| W254111K-8PM2123 | 8 | 17.5 | 22.5 |
| W254111K-9PM2123 | 9 | 20.0 | 25.0 |
| W254111K-10PM2123 | 10 | 22.5 | 27.5 |
| W254111K-11PM2123 | 11 | 25.0 | 30.0 |
| W254111K-12PM2123 | 12 | 27.5 | 32.5 |
| W254111K-13PM2123 | 13 | 30.0 | 35.0 |
| W254111K-14PM2123 | 14 | 32.5 | 37.5 |
| W254111K-15PM2123 | 15 | 35.0 | 40.0 |
| W254111K-16PM2123 | 16 | 37.5 | 42.5 |
| W254111K-17PM2123 | 17 | 40.0 | 45.0 |

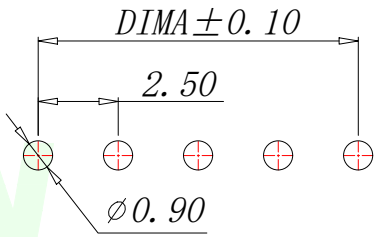


适用线路板(PCB LAYOUT)

| 序号 | 品名 | 材质 |
|---|---|---|
| 1 | HA2.5<br>胶芯 | PA66 UL94V-2<br>Beige |
| 2 | HA2.5<br>直针端子 | Copper Alloy/<br>Tin Plating |

Technical Index:
1. Temperature range: -25° C~85° C.
2. Rated voltage: 250V DC/AC(rms).
3. Rated current: 3.0A.
4. Contact resistance: ≤20mΩ.
5. Withstanding voltage: 1000V AC/minute.
6. Insulation resistance:≥1000MΩ.

| GENERAL TOLERANCES UNLESS SPECIFIED | | 深圳市华明通电子有限公司 Shenzhen Huamingtong Electronics Co., Ltd | |
|---|---|---|---|
| X.° ±0.50 | X.° ±5° | PART NO. W254111K-XPM2123 | TITLE: HA2.5 直针带扣 |
| X.X° ±0.20 | X.X° ±3° | DESIGN: James | CUSTOMER / SIZE A4 / UNITS MM |
| X.XX°±0.10 | X.XX° ±1° | CHED: Talen | SCALE N:A / SHEET 1/1 |
| MANUFACTURE DWG | | APPD: Sophia | |