

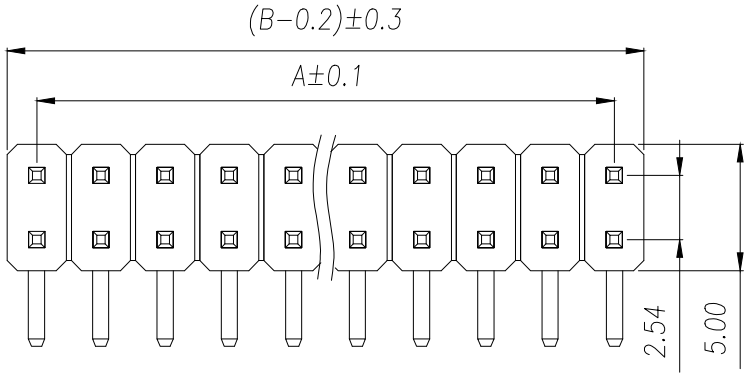



SPECIFICATIONS

Current Rating: 3Amps
Insulation Resistance: 1000MΩ Min
Contact Resistance: 20mΩ Max
Withstanding Voltage: AC 1000V
Operation Temperature: -40° to+105°
Contact Material: Brass
Standard: PA6T
Insrlator Material: Polyester(UL 94V-0)
Contact Plating: Gold Flash
Max.Processing Temp: 240°C for30-60seconds
(260°C for5seconds)

P/N	PIN	DIM.A	DIM.B
BX-PZ2.54-2-1PWS	2*1	0.00	2.54
BX-PZ2.54-2-2PWS	2*2	2.54	5.08
BX-PZ2.54-2-3PWS	2*3	5.08	7.62
BX-PZ2.54-2-4PWS	2*4	7.62	10.16
BX-PZ2.54-2-5PWS	2*5	10.16	12.70
BX-PZ2.54-2-6PWS	2*6	12.70	15.24
BX-PZ2.54-2-7PWS	2*7	15.24	17.78
BX-PZ2.54-2-8PWS	2*8	17.78	20.32
BX-PZ2.54-2-9PWS	2*9	20.32	22.86
.....	.....	.....	.....
BX-PZ2.54-2-40PWS	2*40	(PIN-1)X2.54	(PIN)X2.54

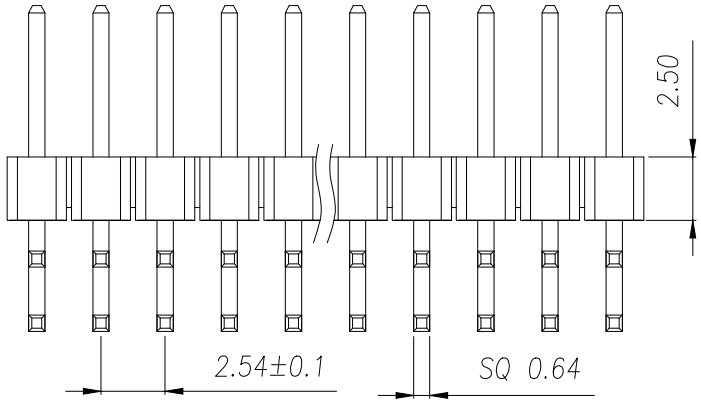

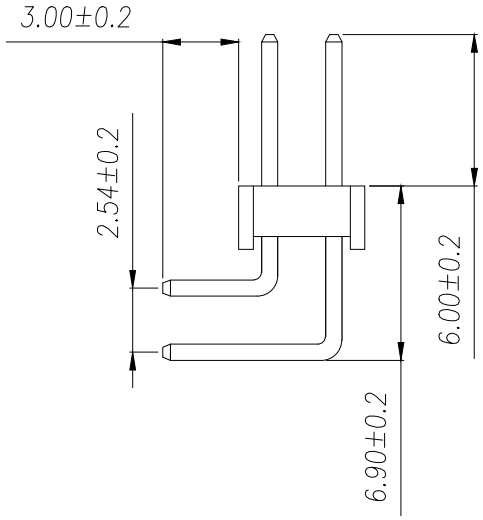

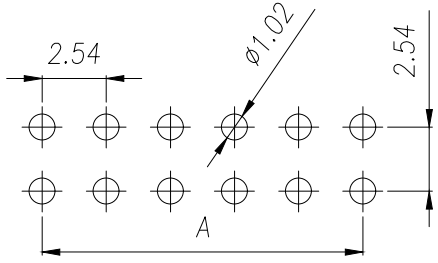

RECOMMEND P.C.B LAYOUT
PCB TOLERANCE:±0.05 (TOP VIEW)

制图 DRAWN	变更内容 DESCRIPTION	日期 DATE	GENERL TOLERANCE		制图 DRAWING	Yu	料号 PART NO.	BX-PZ2.54-2-NPWS	版本 REV.	A
			DECIMALS:	ANGLES:	审核 CHECK	HUANG	品名 TITLE	2.54PH H2.5 2xnPin 90度 PC3.0 PA6.0 PB6.9 L13.8/18.8 6T 有铅版	页次 SHEET	1/1
			X.±0.30	X°±5°			客户料号 CUTM.NO.			
			X.X±0.20	X.X°±1°	核准 APPROVAL	RUAN				
			X.XX±0.10	X.XX°±0.5°	单位 UNITS	MM	比例 SCALE	1:1		

Bossie（博锡）