Features

- Planar Mosfets
- Excellent $R_{DS(on)}$
- Low Gate Charge
- High current Capability
- Green product RoHS compliant

Bvdss	Rdson	ID
650V	650mΩ	12A

Application

RoHS

- Power factor correction (PFC)
- Switching power supply (SMPS)
- LED driver

Package



Marking and pin assignment



TO-220F Top view



Schematic diagram

Package Marking and Ordering Information

Device Marking	Device	Device Package	Quantity
12N65	HL12N65RF	TO-220F	50

Absolute Maximum Ratings (T_J=25℃ unless otherwise noted)

Parameter		Symbol	Value	Unit
Drain-Source Voltage		V_{DS}	650	V
Gate-Source Voltage		V_{GS}	±30	V
Continuous Drain Current[1]	T_C=25℃	I_D	12	A
	T_C=100℃		7.5	A
Pulsed Drain Current[2]		I_{DM}	48	A
Body-Diode Continuous Current		I_S	12	A
Avalanche Current[3]		I_{AS}	10	A
Single Pulsed Avalanche Energy[3]		EAS	499	mJ
Total Power Dissipation[4]	T_C = 25℃	P_D	313	W
	T_C=100℃		125	
Operating Junction Temperature Range		T_J	-55 ~ 150	℃
Storage Temperature Range		T_{STG}	-55 ~ 150	℃

Thermal Resistance Ratings

Parameter	Symbol	Value	Unit
Thermal Resistance Junction-Ambient	$R_{\theta JA}$	54	℃/W
Thermal Resistance Junction-Case	$R_{\theta JC}$	2	℃/W

Ordering Information

Ordering Number	Package	Pin Assignment			Packing
Halogen Free		G	D	S	
HL12N65RF	TO-220F	1	2	3	Tube

Electrical Characteristics (T_J=25℃unless otherwise noted)

Parameter	Symbol	Test Conditions	Min	Typ	Max	Units
Drain-Source Breakdown Voltage	BV_{DSS}	I_D=250μA, V_{GS}=0V	650	-	-	V
Drain-Source Leakage Current	I_{DSS}	V_{DS}=650V, V_{GS}=0V,T_J=25°C	-	-	1	μA
		V_{DS}=650V,V_{GS}=0V,T_J=55°C	-	-	5	
Gate-Source Leakage Current	I_{GSS}	V_{GS}=±30V,V_{DS}=0V	-	-	±100	nA
Gate Threshold Voltage	$V_{GS(th)}$	V_{GS}=V_{DS} , I_D=250uA	2	2.9	4	V
Static Drain-Source On-Resistance	$R_{DS(on)}$	V_{GS}=10V, I_D=6A	-	650	800	mΩ
Forward Transconductance	gfs	V_{DS}=5V,I_D=6A	-	9	-	S
Gate Resistance	R_g	V_{GS}=0V,V_{DS}=0V, f=1MHz	-	1.3	-	Ω
Total Gate Charge	Q_g	V_{DS}=520V,V_{GS}=10V, I_D=10A	-	42	-	nC
Gate Source Charge	Q_{gs}		-	11	-	
Gate Drain Charge	Q_{gd}		-	13	-	
Turn-On Delay Time	$T_{d(on)}$	V_{GS}=10V,V_{DS}= 325V, I_D=12A,R_G=25Ω	-	33	-	ns
Rise Time	T_r		-	29	-	
Turn-Off Delay Time	$T_{d(off)}$		-	63	-	
Fall Time	T_f		-	49	-	
Input Capacitance	C_{iss}	V_{GS}=0V,V_{DS}=25V, f=1MHz	-	2124	-	pF
Output Capacitance	C_{oss}		-	149	-	
Reverse Transfer Capacitance	C_{rss}		-	9	-	
Continuous Source Current	I_S	V_G=V_D=0V,Force Current	-	-	-	A
Diode Forward Voltage	V_{SD}	I_S=12A,V_{GS}=0V	-	0.8	1.2	V
Reverse Recovery Time	t_{rr}	I_F=12A,di/dt=100A/μs	-	871	-	ns

Reverse Recovery Charge	Q_{rr}		-	9.7	-	μC

Notes:

1. Computed continuous current assumes the condition of T_{J_Max} while the actual continuous depends on the thermal & Electromechanical application board design.

2.Repetitive Rating: Pulse Width Limited by Maximum Junction Temperature.

3.This singe-pulse measurement was taken under the following condition [L=10mH,VGS=10V,VDS=50V] while its value is limited by T_{J_Max}=150°C.

4.The power dissipation P_D is based on T_{J_Max}=150℃.

5.This value is guaranteed by design hence it is not included in the production test.

Typical Performance Characteristics

Figure 1: Saturation Characteristics

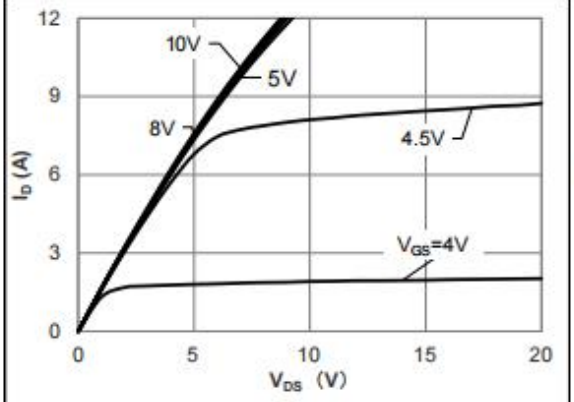

Figure 2: Transfer Characteristics

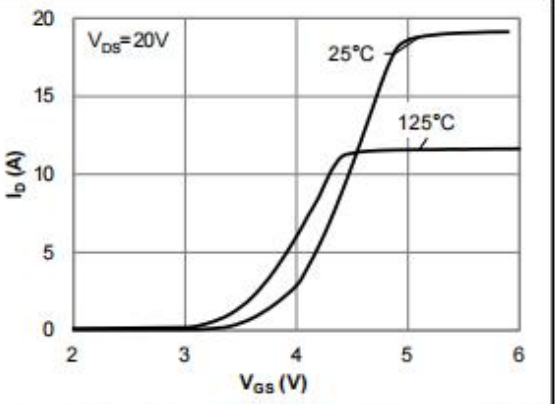

Figure 3: $R_{DS(ON)}$ vs. Drain Current

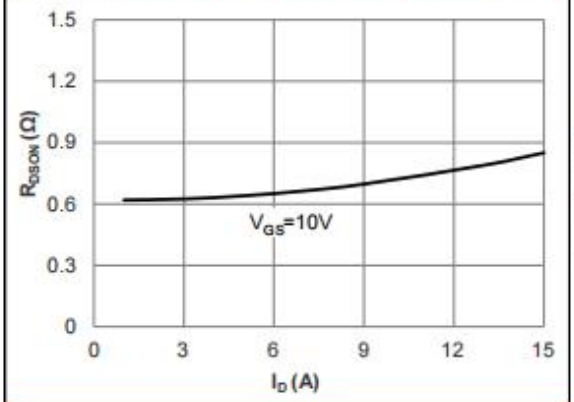

Figure 4: $R_{DS(ON)}$ vs. Junction Temperature

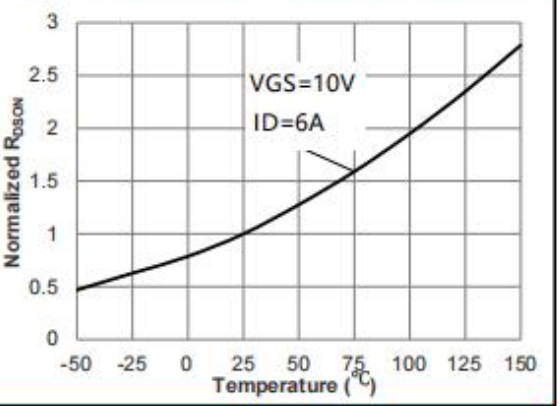

Figure 5: $R_{DS(ON)}$ vs. Gate-Source Voltage

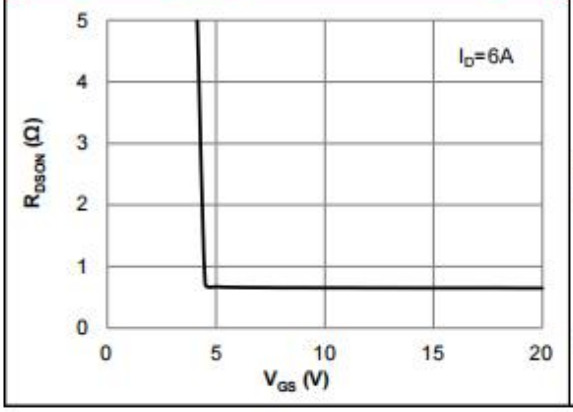

Figure 6: Body-Diode Characteristics

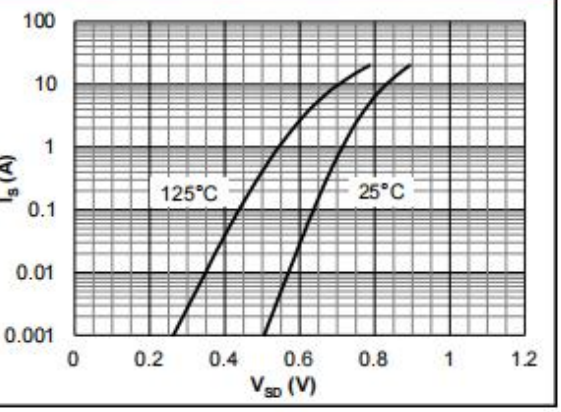

Figure 7: Gate-Charge characteristics

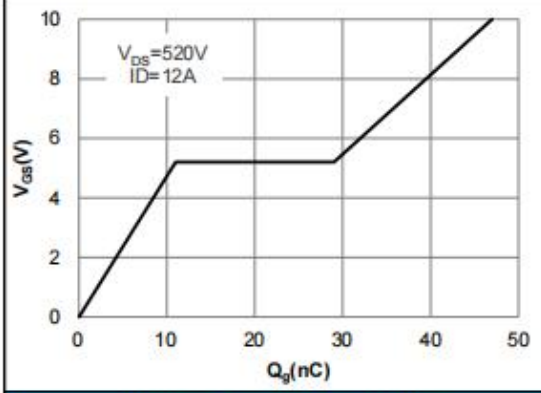

Figure 8: Capacitance characteristics

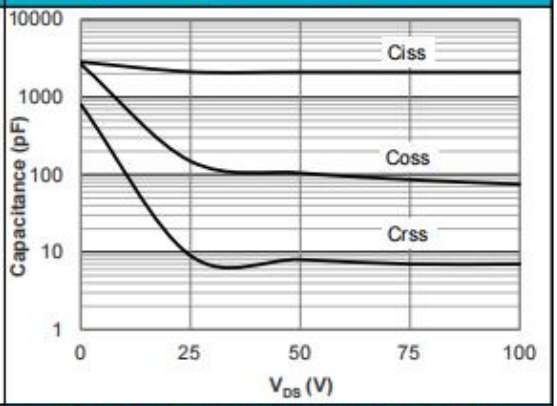

Figure 9: Current De-rating

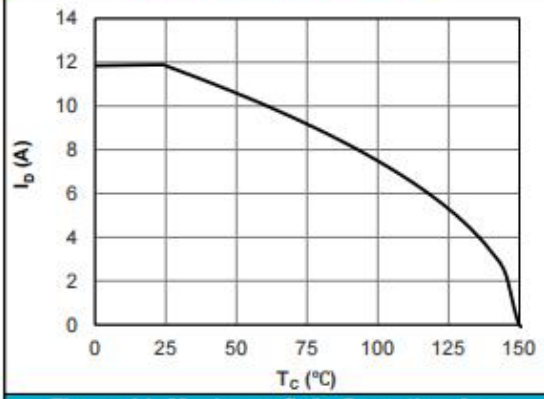

Figure 10: Maximum Safe Operating Area (TO-220C/TO-263)

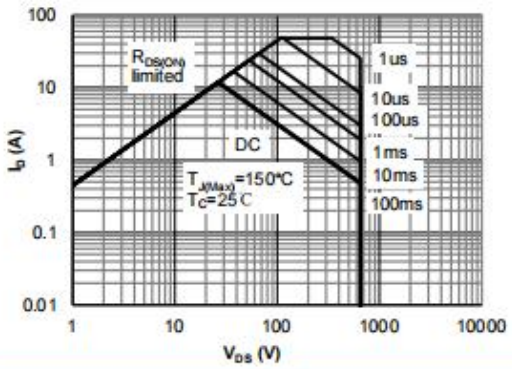

Figure 11: Maximum Safe Operating Area (TO-220F)

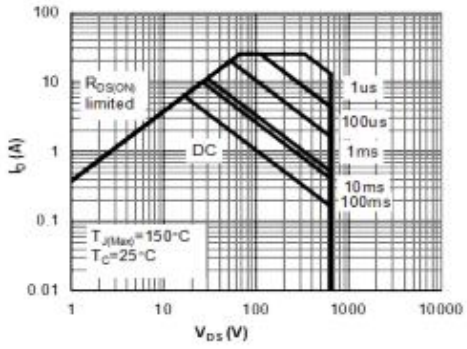

Figure 12: Normalized Maximum Transient Thermal Impedance(TO-220F)

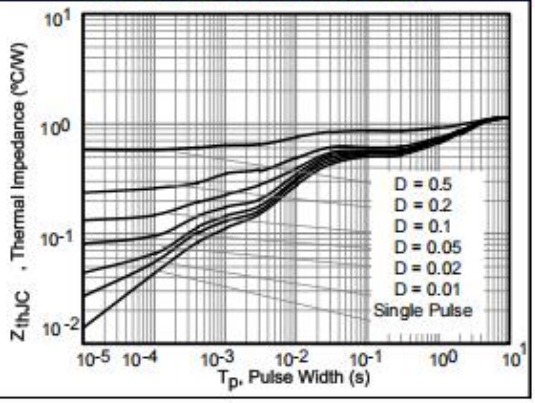

Figure 13: Normalized Maximum Transient Thermal Impedance(TO-220C/TO-263)

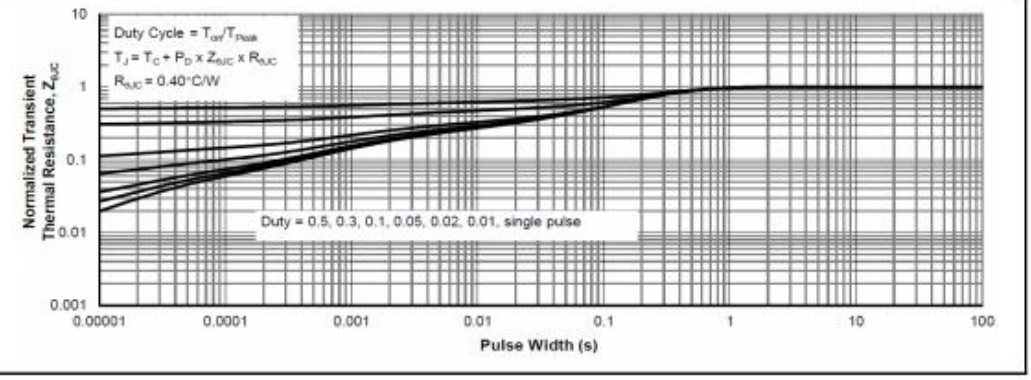

Test Circuit and Waveform

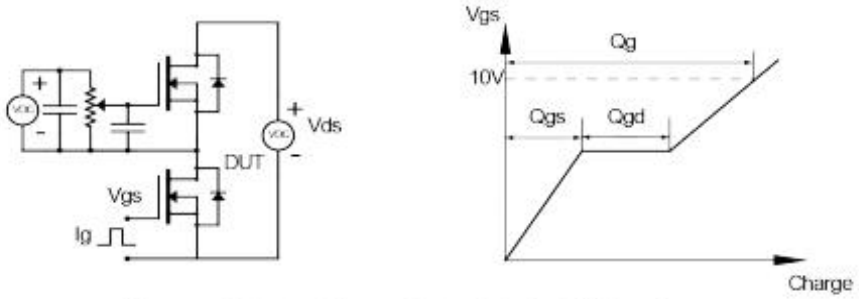

Figure1: Gate Charge Test Circuit & Waveforms

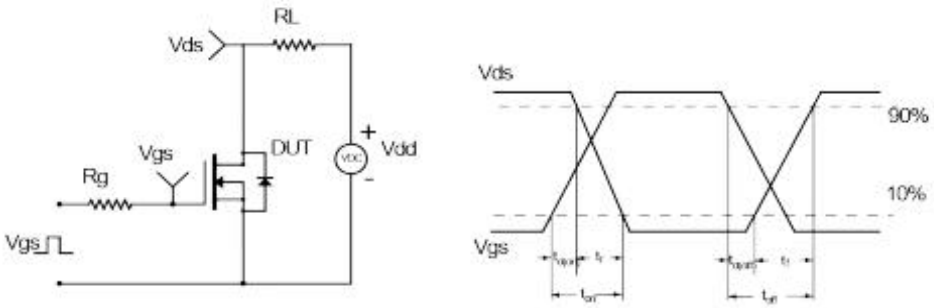

Figure2: Resistive Switching Test Circuit & Waveforms

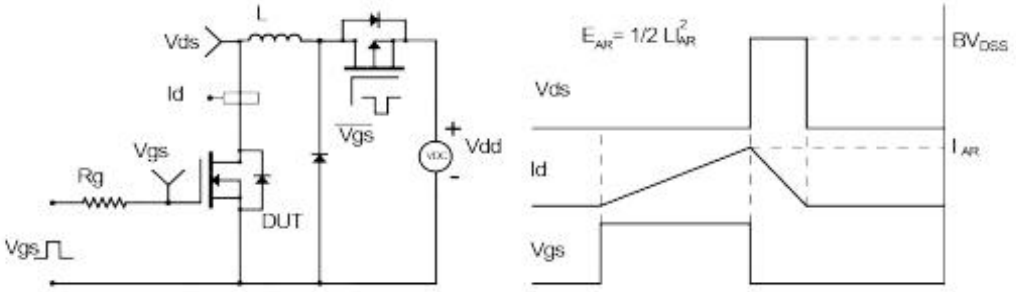

Figure3: Unclamped Inductive Switching (UIS) Test Circuit & Waveforms

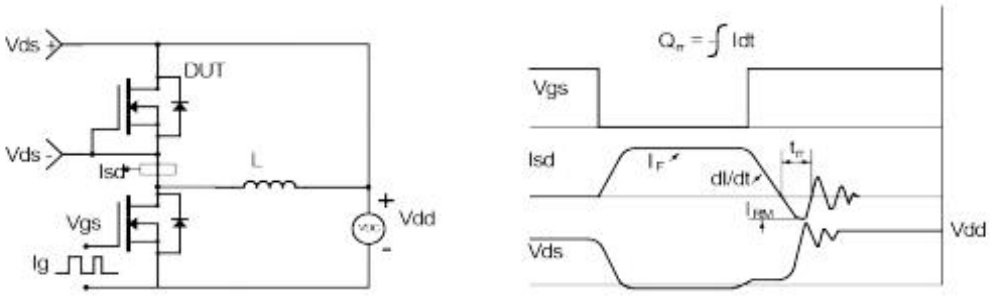

Figure4: Diode Recovery Test Circuit & Waveforms

Package Dimensions TO-220F

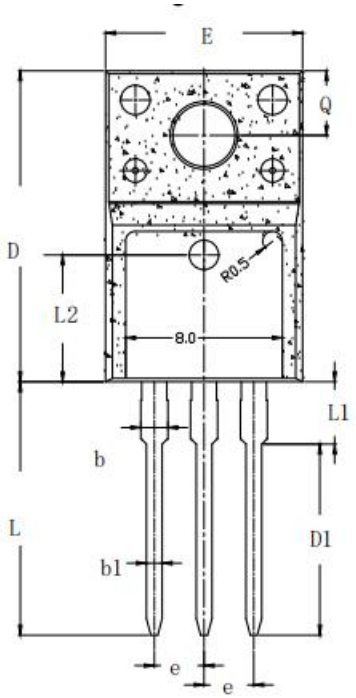

TOP VIEW

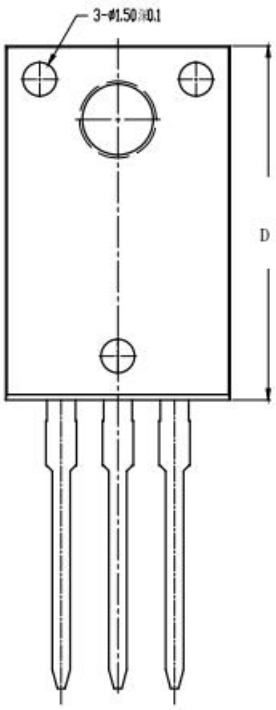

BOTTOM VIEW

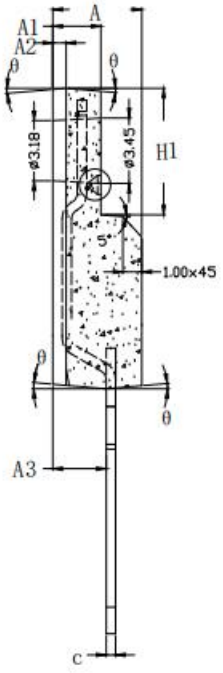

SIDE VIEW

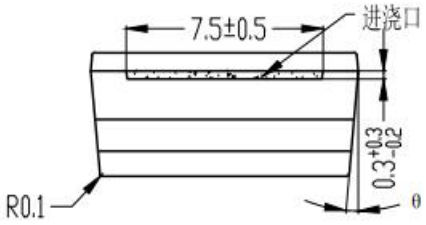

SIDE VIEW

SYMBOL	MILLIMETER		
	MIN	TYP.	MAX
A	4.60	4.70	4.80
A1	2.39	2.54	2.69
A2	0.60	0.70	0.80
A3	2.81	2.82	2.83
b	1.61	1.62	1.63
b1	-	0.80	-
c	-	0.50	-
D	15.72	15.87	16.02
D1	-	9.75	-
E	9.91	10.06	10.21
e	2.54 BSC		
H1	6.67	6.68	6.69
L	12.90	12.93	12.96
L1	-	3.18	-
L2	6.47 REF		
Q	-	3.30	-
θ1	1°	3°	5°

Important Notice and Disclaimer

HL Microelectronics reserves the right to make changes to this document and its products and specifications at any time without notice.
Customers should obtain and confirm the latest product information and specifications before final design, purchase or use.

HL Microelectronics makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, not does HL Microelectronics assume any liability for application assistance or customer product design.

HL Microelectronics does not warrant or accept any liability with products which are purchased or used for any unintended or unauthorized application.

No license is granted by implication or otherwise under any intellectual property rights of HL Microelectronics.

HL Microelectronics products are not authorized for use as critical components in life support devices or systems without express written approval of HL Microelectronics.