





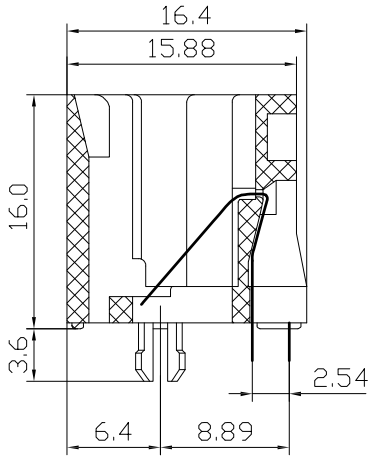

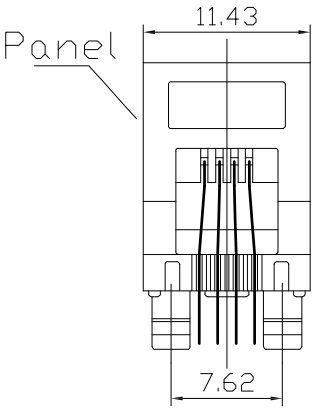



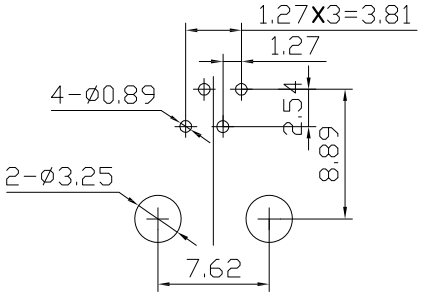

PC Board Layout
Component Side Shown

NOTES:

MATERIAL:

1. HOUSING MATERIAL :GLASS FILLED POLYESTER UL94V-0.
2. CONTACT MATERIAL :PHOSPHOR BRONZE t=0.35mm.
3. PLATING : GOLD PLATING 3u"~50u"OVER NICKEL

ELECTRICAL:

1. VOLTAGE RATING :125 VAC RMS.
2. CURRENT RATING :1.5 AMP.
3. CONTACT RESISTANCE :30 MILLIOHMS MAX.
4. INSULATION RESISTANCE :500 MEGOHMS MIN @ 500V DC .
5. DIELECTRIC WITHSTANDING RESISTANCE
:1000V AC RMS 50Hz. 1MIN.

MECHANICAL:

1. DURRABILITY: :750 CYCLES MIN.
2. PCB RETENTION PRE-SOLDER :1 LB MIN.

ENVIRONMENTAL:

1. STORAGE : -40° C TO 85° C.
2. OPERATION : -25° C TO 85° C.

TOLERANCE TABLE	
.0	±0.30
.00	±0.20
.000	±0.05

APPROVED:	DATE:	Ckmtw 深圳市灿科盟实业有限公司 CHANKEMENG INDUSTRYCO.,LTD
CHECKED:	DATE:	TITLE: RJ11-4P/4C 52A 直插 全塑 无耳 黑色
DRAWN: ZYJ	DATE: 2018-09-25	PART.NO. R-RJ11S04P-A002
		UNIT mm SCALE free
		FILE NO. Ckmtw-RJ11-0061 REV. A HY04