


XKB Connecitity




LEFT SIDE VIEW





FRONT VIEW

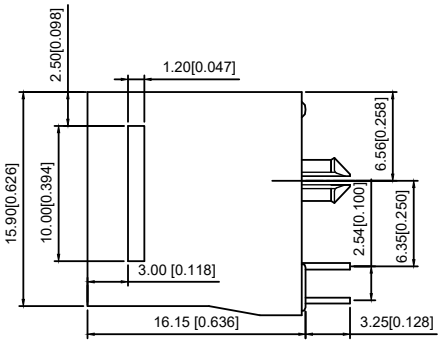


RIGHT SIDE VIEW




BOTTOM VIEW

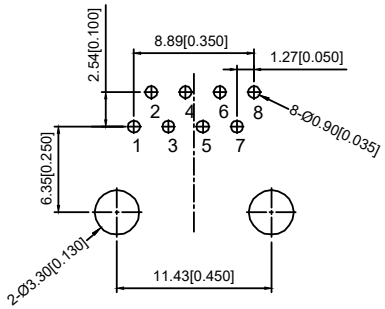


BACK VIEW

XKB Connecitity

MATERIAL 材料:
HOUSING 外壳: PBT,UL94V-0,BLACK.
TERMINAL 端子: PHOSPHOR BRONZE Ø=0.46MM, GOLD PLATING
MECHANICAL 机械:
DURABILITY 耐用性: 750 CYCLES MIN,12.5MM/MINUTE.
INSERTION FORCE 插入力:2.2KG.F MAX
RETENTION STRENGTH 保持力:7.7KG.F BETWEEN JACK AND PLUG.
OPERATING TEMPERATURE 工作温度: -40°C~+85°C.
STORAGE TEMPERATURE 储存温度: -40°C~+85°C.
ALL CRITICAL DIMENSIONS WITH "*"
ELECTRICAL电气:
VOLTAGE 电压: 125 VOLTS AC.
CURRENT RATING 电流额定值: 1.5AMP.
DIELECTRIC STRENGTH 介电强度: 1000 VAC RMS 50HZ OR 60HZ,1 MIN
INSULATION RESISTANCE 绝缘电阻: 500 MEGA OHMS MIN.INITIAL
AFTER 500V DC FOR 1 MINUTE.
CONTACT RESISTANCE 接触电阻:SINGLE TERMINAL 30 MILLIOHMS MAX.
INITIAL 50 MILLIOHMS MAX. AFTER
DURABILITY TEST.

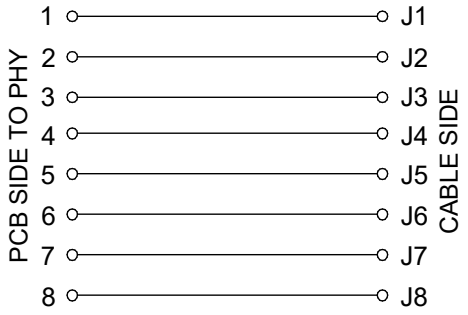


| | | | | | | |
|---|---|---|---|---|---|---|
| | | | | | ANGLAR | ±5° |
| ΔX | | | | | L≤ 4 | ±0.2 |
| ΔX | | | | | 4<L≤ 16 | ±0.3 |
| ΔX | | | | | 16<L≤ 63 | ±0.4 |
| MARK | DESCRIPTION | DATE | REVISED | APPROVED | L> 63 | ±0.5 |
| REVISIONS | | | | | UNSPECIFIED TOLERANCES | |

www.helloxkb.com www.helloxkb.cn www.xk-dg.cn

XKB INDUSTRIAL PRECISION CO.,LIMITED

| | | | |
|---|---|---|---|
| DSND | | SCALE: N/A | MODEL TYPE: RJ JACK |
| DWN | | VIEW: | PART NO.: X43ADIWA1DY9017 |
| CHKD | | UNIT: mm/in | DWG NO.: X-X43ADIWA1DY9017 |
| APPD | | SIZE: A4 | WEIGHT / SHEET 1/1 / REVISION A0 |