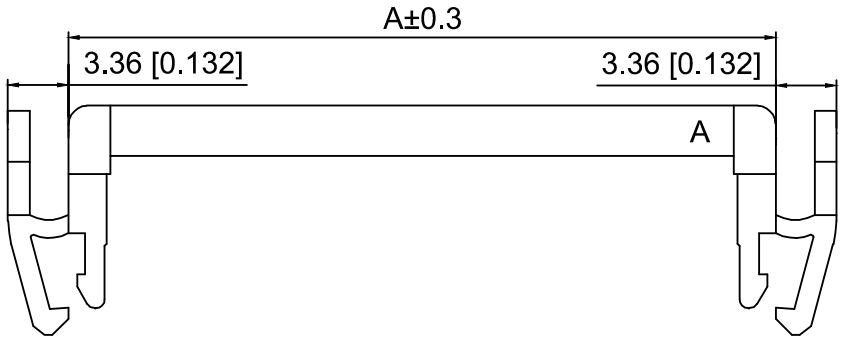





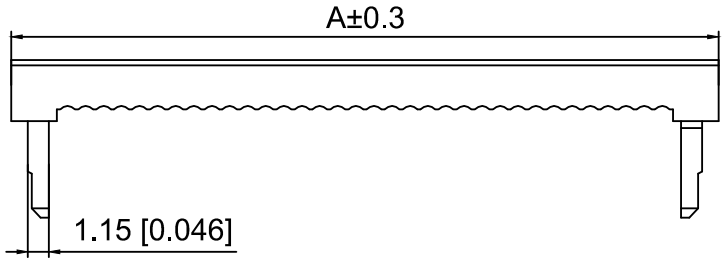





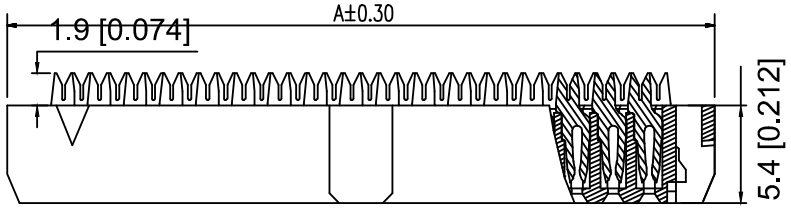





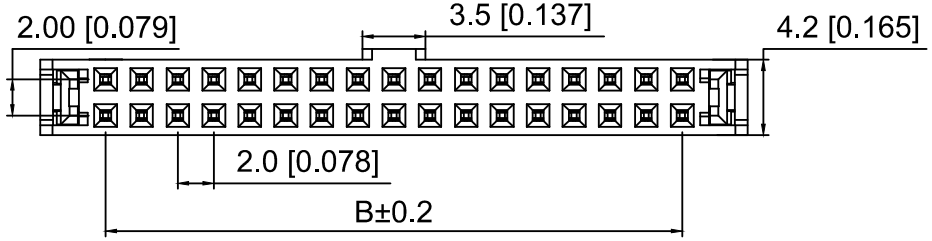


Specifications:
规格：
Voltage rating:250V AC/DC
额定电压：250V AC/DC
Current rating:1A AC/DC
额定电流：1A AC/DC
Withstanding voltage:500V AC/minute
耐受电压：500V AC/分钟
Temperature range:-40℃-+105℃
温度范围：-40℃-+105℃
Insulation resistance：1000MΩ min
绝缘电阻：1000MΩ Min
Contact resistance:20mΩ Max
接触电阻：20mΩ Max

X2001 HA3 -2x13- PT V01
① ② ③ ④ ⑤

1.Series No
2.Category:HA3-Three piece double contact with bow button
3.Row No.Pin No:2xXX-2x03P-2x30P
4.Material:PT-PBT Glass Fiber UL94V-0
5.Plating:V01-Gold Flash

| Poles | Dimensions | | Poles | Dimensions | |
|---|---|---|---|---|---|
| | A | B | | A | B |
| 2x03 | 11.20 | 4.00 | 2x13 | 31.20 | 24.00 |
| 2x04 | 13.20 | 6.00 | 2x14 | 33.20 | 26.00 |
| 2x05 | 15.20 | 8.00 | 2x15 | 35.20 | 28.00 |
| 2x06 | 17.20 | 10.00 | 2x17 | 39.20 | 32.00 |
| 2x07 | 19.20 | 12.00 | 2x18 | 41.20 | 34.00 |
| 2x08 | 21.20 | 14.00 | 2x20 | 45.20 | 38.00 |
| 2x09 | 23.20 | 16.00 | 2x22 | 49.20 | 42.00 |
| 2x10 | 25.20 | 18.00 | 2x25 | 55.20 | 48.00 |
| 2x11 | 27.20 | 20.00 | 2x30 | 65.20 | 58.00 |
| 2x12 | 29.20 | 22.00 | / | | |

| | | | |
|---|---|---|---|
| X2001HA3-2x13-PTV01 | PBT Glass Fiber | Brass | X2001W |
| PART N0 | Material | Material(Pin) | Suitable XKB Wafer |

| MARK | DESCRIPTION | DATE | REVISED | APPROVED |
|---|---|---|---|---|
| | | | | |
| ΔX | | | | |
| ΔX | | | | |
| ΔX | | | | |

REVISIONS

| | |
|---|---|
| ANGLAR | ±5° |
| L≤ 4 | ±0.2 |
| 4<L≤ 16 | ±0.3 |
| 16<L≤ 63 | ±0.4 |
| L> 63 | ±0.5 |

UNSPECIFIED TOLERANCES

www.helloxkb.com www.helloxkb.cn www.xk-dg.cn

XKB INDUSTRIAL PRECISION CO.,LIMITED

| | | | |
|---|---|---|---|
| DSND | | SCALE: N/A | MODEL TYPE: 2.0mm IDC Connector |
| DWN | | VIEW: | PART NO.: X2001HA3-2x13-PTV01 |
| CHKD | | UNIT: mm/in | DWG NO.: X-X2001HA3-2x13-PTV01 |
| APPD | | SIZE: A4 | |

| WEIGHT | SHEET | REVISION |
|---|---|---|
| | 1/1 | A0 |