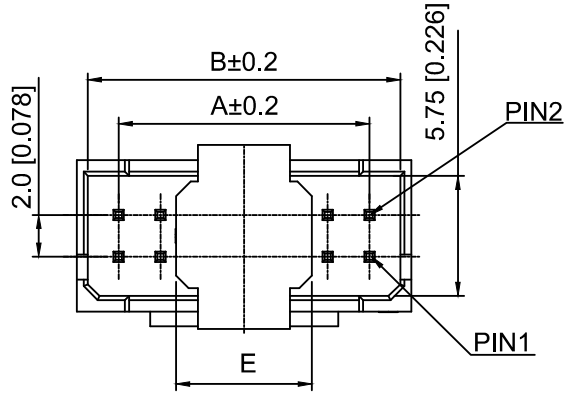

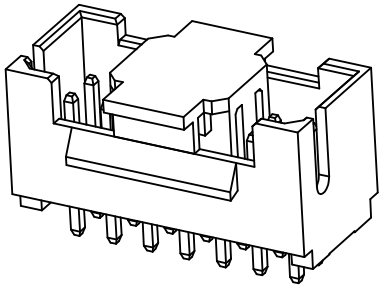

Specifications:
规格：
Voltage rating:250V AC/DC
额定电压：250V AC/DC
Current rating:3A AC/DC
额定电流：3A AC/DC
Withstanding voltage:1000V AC/minute
耐受电压：1000V AC/分钟
Temperature range:-25℃-+85℃
温度范围：-25℃-+85℃
Insulation resistance:≥1000MΩ
绝缘电阻：≥1000MΩ
Contact resistance:≤30mΩ
接触电阻：≤30mΩ

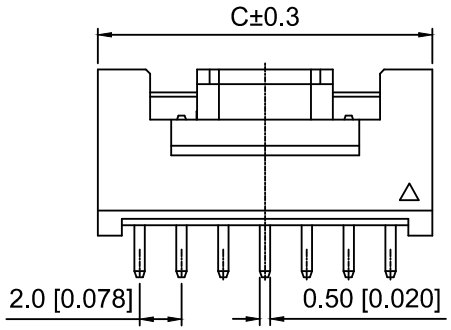



X2026 W V - 2x08 D R - LP SN
① ② ③ ④ ⑤ ⑥ ⑦ ⑧

1.Series No
2.Category:W-Wafer
3.Welding Board Angle:V-Stright 180°
4.Row No.Pin No:2xXX-2x02~2x16Pin
5.Special No:D-With Lock
6.Special No:R-DIP 2.0mm
7.Material:LP-LCP UL94V-0 ,Natural
CAP:LCP UL94V-0 ,Natural
8.Plating:SN- Tin Plated

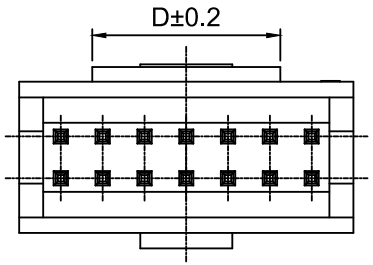

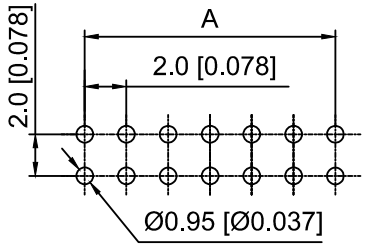

Recommended PCB Layout(Top view)
Tolerance:±0.05mm

Poles	Dimensions（mm）					Poles	Dimensions（mm）				
	A	B	C	D	E		A	B	C	D	E
2x02	2.00	4.95	6.60	3.00	4.50	2x10	18.00	20.95	22.60	15.00	6.50
2x03	4.00	6.95	8.60		6.50	2x11	20.00	22.95	24.60	17.00	
2x04	6.00	8.95	10.60			2x12	22.00	24.95	26.60	19.00	
2x05	8.00	10.95	12.60	5.00		2x13	24.00	26.95	28.60	21.00	
2x06	10.00	12.95	14.60	7.00		2x14	26.00	28.95	30.60	23.00	
2x07	12.00	14.95	16.60	9.00		2x15	28.00	30.95	32.60	25.00	
2x08	14.00	16.95	18.60	11.00		2x16	30.00	32.95	34.60	27.00	
2x09	16.00	18.95	20.60	13.00		/					

X2026WV-2x08DR-LPSN	LCP	Brass	X2026H
PART N0	Material	Material(Pin)	Suitable XKB Housing

					ANGLAR	±5°
ΔX					L≤ 4	±0.2
ΔX					4<L≤ 16	±0.3
ΔX					16<L≤ 63	±0.4
MARK	DESCRIPTION	DATE	REVISED	APPROVED	L> 63	±0.5
REVISIONS					UNSPECIFIED TOLERANCES	

www.helloxkb.com www.helloxkb.cn www.xk-dg.cn

XKB

DSND		SCALE: N/A	MODEL TYPE: 2.0mm Crimp Style Connector
DWN		VIEW:	PART NO.: X2026WV-2x08DR-LPSN
CHKD		UNIT: mm/in	DWG NO.: X-X2026WV-2x08DR-LPSN
APPD		SIZE: A4	

XKB INDUSTRIAL PRECISION CO.,LIMITED

WEIGHT	SHEET	REVISION
	1/1	A0