




www.dzyjzj.com Tel:0755-27575531 Fax:0755-27576267

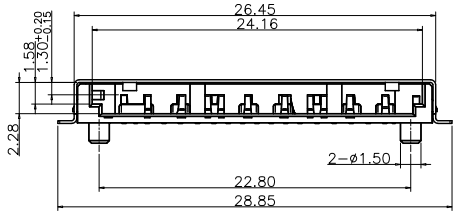


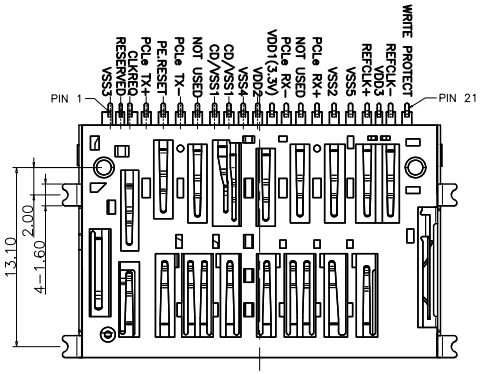




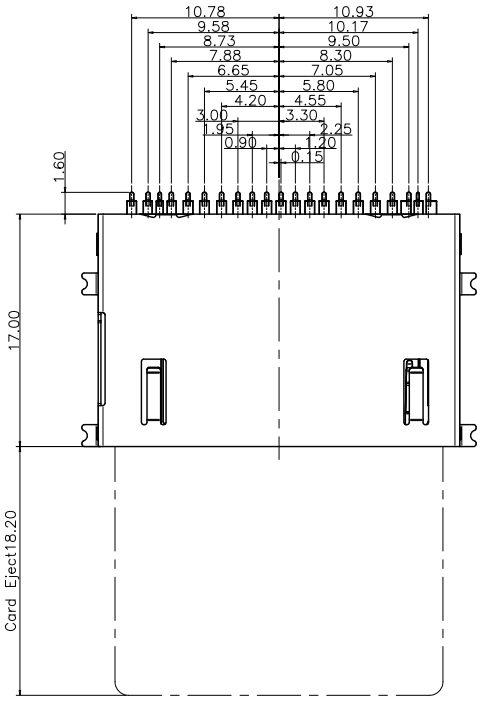

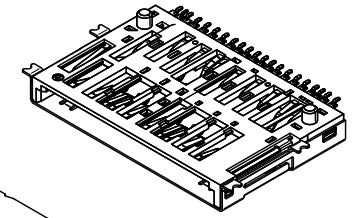



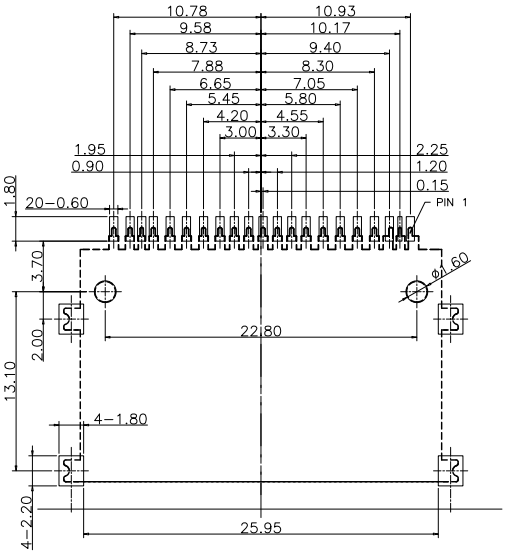

RECOMMEENDER PCB LAYOUT
TOLERANCE UNLESS OTHERWISE IS ±0.05

CARD DETECT	7# o—o 8# CARD OUT	7# o—o 8# CARD INSERT
WRITE PROTECT	19# o—o GND WRITE PROTECTED	19# o—o GND# WRITE ENABLE

Notes:

1. All Dimensions are in Millimeters.
2. Operation voltage: 10 VAC max.
3. Current rating : 1 Amps max.
4. Contact resistance: 100m ohms max.
5. Insulation resistance: 1000M ohms min. 500 VDC
6. Dielectric withstanding voltage: 500 VAC / 1minute
7. Opterating Temperature: −20°C to +60°C
8. Storage Temperature: −40°C to +70°C
9. Durability 10000 cycles.

深圳市华宇创精密电子有限公司

TOLERANCE: X.X ±0.30, X.XX ±0.25, X.XXX ±0.15, X.° ±2°, X.X° ±0.5°	DRAWED BY : 陈一鸣	DATE : 2014-02-23	PART NAME: SD 7.0 NO PUSH 短体SMT 板上型3.2H		
	CHECKED BY: 马跃	DATE : 2014-02-23	PART NO.	HYCW89-SD21-320B	
			MOLD NO.		
UNIT: mm [inch]	APPROVED BY: 邱敏	DATE : 2014-02-23	DRAW NO:	HYC-2502182105	
SCALE:1:1 SIZE: A4			SHEET NO.	1 OF 1	