



RoHS compliant
by exemption

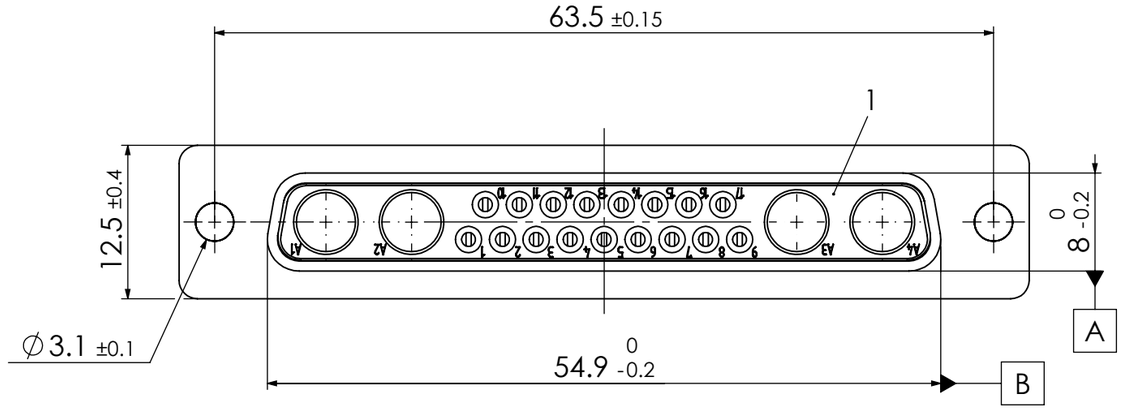


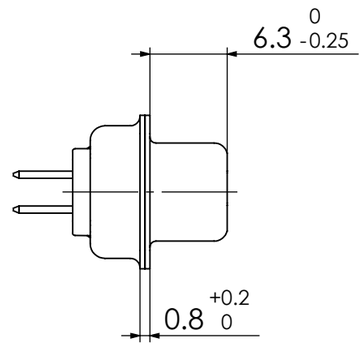

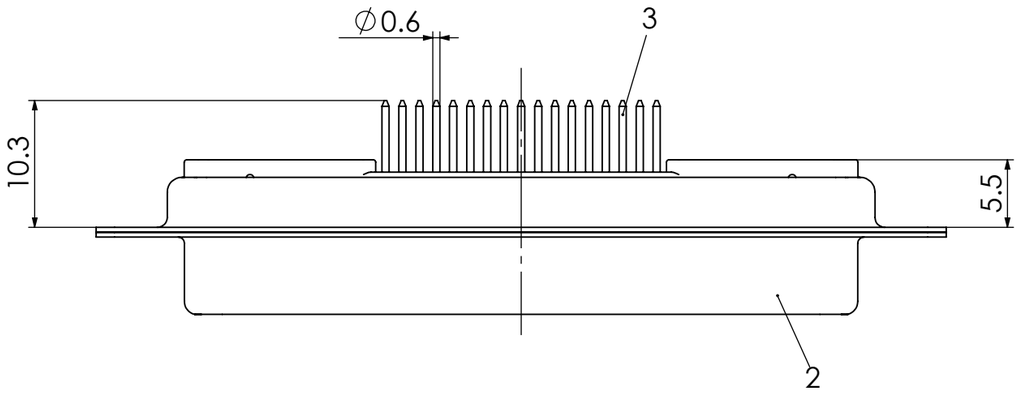

PCB hole pattern, mounting side

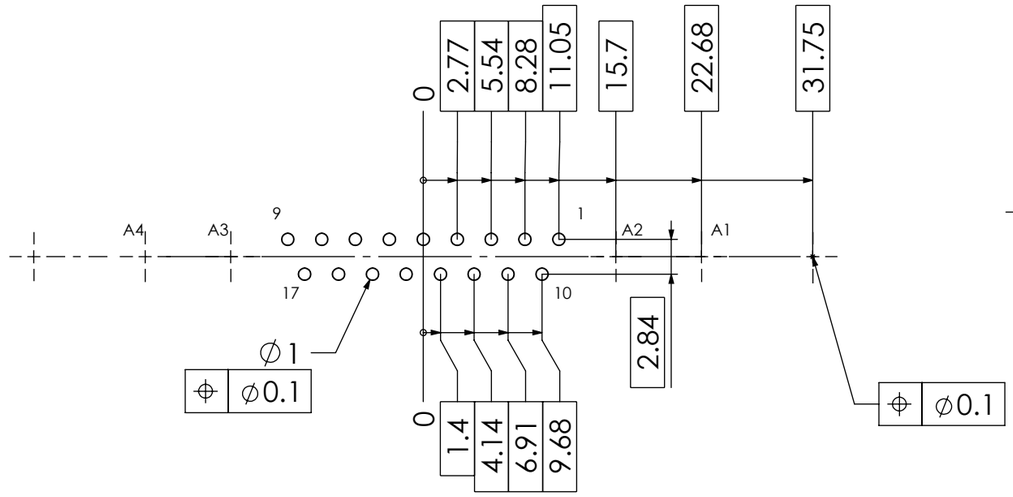

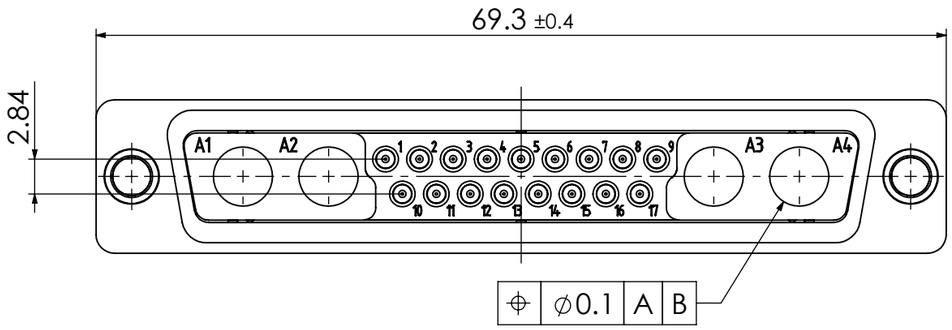

3	17	Signal contact	S1 / Brass	0.8µm Au
2	1	Shell	Steel	tin plated
1	1	Insulator	PBT (-55°C to +130°C) acc. UL94V-0	green
No.	*St.*	*Part*	*Type Description/Material*	*Surface plating/Colour/Class*

COMMENT:
ALL RIGHTS ARE RESERVED BY US FOR THIS DRAWING. WITHOUT OUR PRIOR CONSENT, IT MAY NEITHER BE DUBLICATED NOR MADE AVAILABLE TO A THIRD PARTY, AND IT ALSO MAY NOT BE IMPROPERLY USED BY TE RECEIVER, OR A THIRD PARTY.

FUNCTIONAL SYMBOLS
F = 0
E = 0
D = 0

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

DIMENSION UNITS: mm
SCALE: 2:1
MEASUREMENTS WITHOUT TOLERANCE ACC. TO: ISO 2768-m

CURRENT REVISION
DRWN: DRAWN BY msteinbrueck 01-02-2019
APPR: APPR BY MTeubel 04-02-2019

INITIAL REVISION
DRWN: DRAWN BY ADenzinger 20-12-2006
APPR: APPR BY skusber 20-12-2006

REV.	CH.-NO.
2	24130
1	

REPLACEMENT FOR:
FRIST ANGLE PROJECTION
DRAWING: A3-SIZE

molex

FCT D-Sub Mixed-Layout Connector

PRODUCT CUSTOMER DRAWING

MATERIAL NUMBER: 1731070084
REVISION: 2
DOCUMENT NUMBER: FM21WA4S1-K121
CUSTOMER: GENERAL MARKET
SHEET NUMBER: 1 OF 1