


Jul.1.2025 Copyright 2025 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

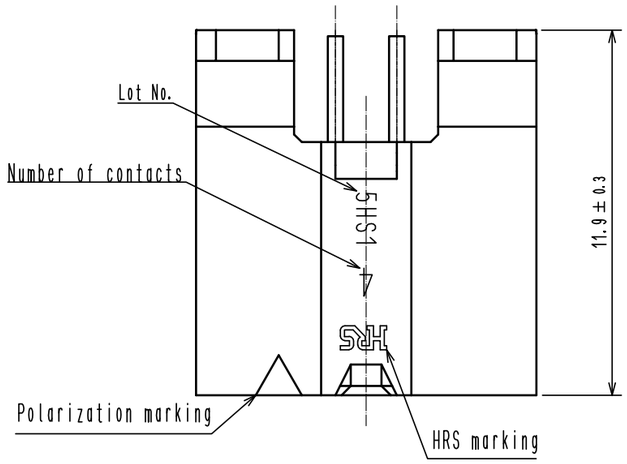



RECOMMENDED PATTERN(FREE)
(BOAD THICKNESS t=1.6mm)

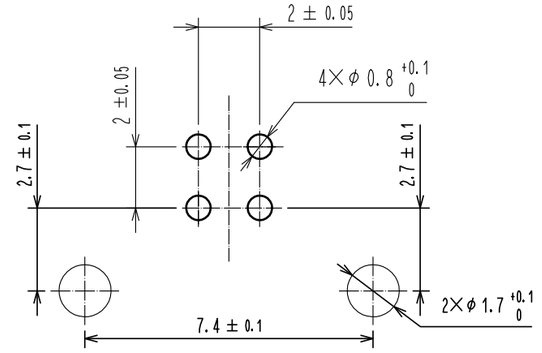


Note 1. Per tray : 234 Pieces.
2. The dimension parenthesis are for reference.
△1 3. UL(File No. E52653),
C-UL(File No. E52653) authorization article.

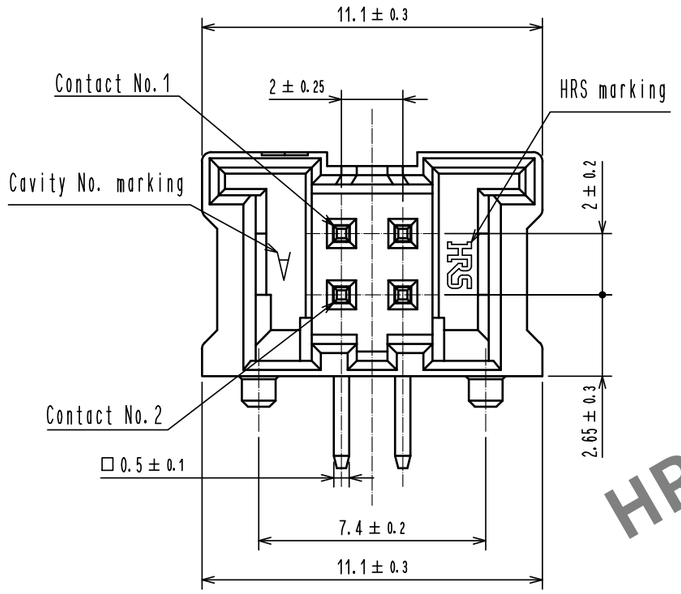


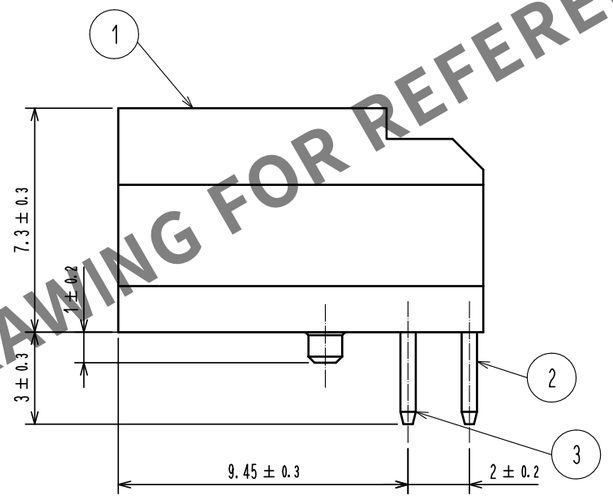

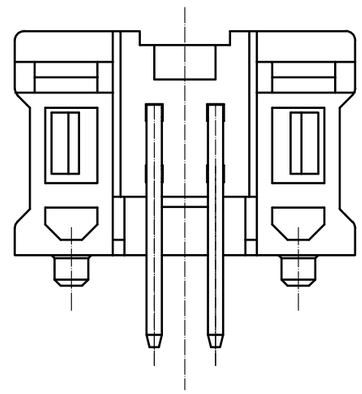

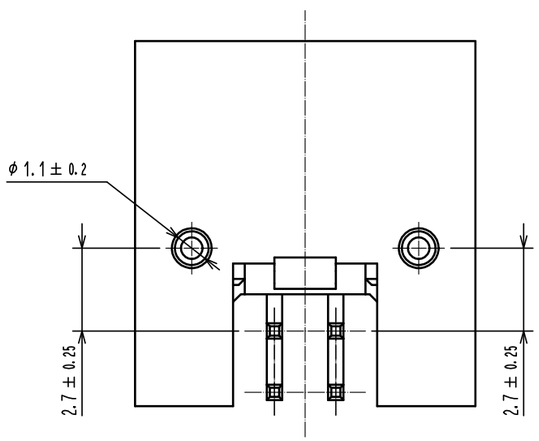

MATING FIGURE(2:1)

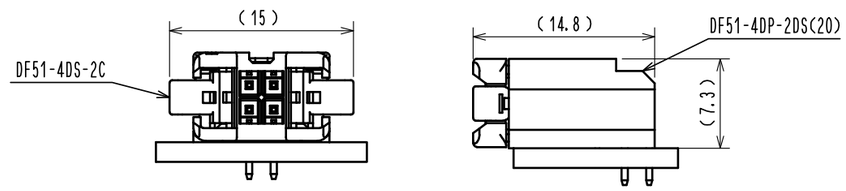

NO.	MATERIAL	FINISH , REMARKS	NO.	MATERIAL	FINISH , REMARKS
2	BRASS	SURFACE:Sn PLATING 1μm MIN UNDER PLATING:NICKEL PLATING 0.5μm MIN	4	PS	WHITE
1	PBT	UL94V-0, BLACK	3	BRASS	SURFACE:Sn PLATING 1μm MIN UNDER PLATING:NICKEL PLATING 0.5μm MIN

UNITS	SCALE		COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
mm	5 : 1	△1	1	DIS-H-00004437	TS. MIYAKI	SZ. ONO	20181121


HIROSE ELECTRIC CO., LTD.


APPROVED	HS. OKAWA	20180410	DRAWING NO. EDC-362040-20-00
CHECKED	ST. WADA	20180410	PART NO. DF51-4DP-2DS(20)
DESIGNED	TH. SATO	20180409	CODE NO. CL543-5016-7-20
DRAWN	TH. SATO	20180409	△1 1/2

HRS DRAWING FOR REFERENCE

Jul.1.2025 Copyright 2025 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.


PACKING DIAGRAM (1:2)

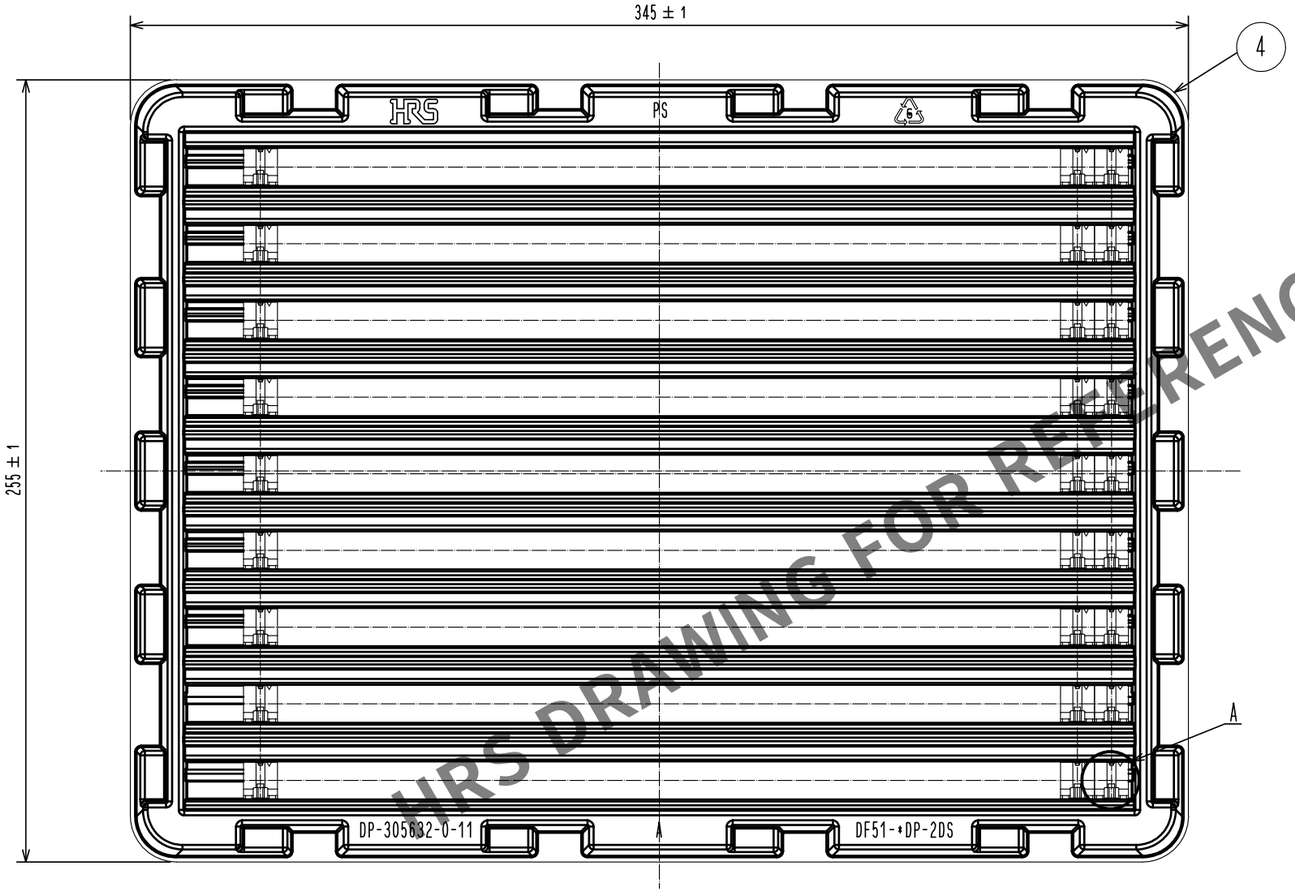





A(2:1)



HRS DRAWING FOR REFERENCE

HRS	DRAWING NO.	EDC-362040-20-00
	PART NO.	DF51-4DP-2DS(20)
	CODE NO.	CL543-5016-7-20

1 2/2