
Features

- Surface-mounted package
- Advanced trench cell design
- Extremely low threshold voltage
- ESD protected (HBM > 2KV)



Quickre ference

- BV ≧ 60 V
- P_{tot} ≦ 0.83 W
- I_D ≦ 0.5 A
- $R_{DS(ON)}$ ≦ 3 Ω @ V_{GS} = 10 V
- $R_{DS(ON)}$ ≦ 4 Ω @ V_{GS} = 4.5 V



Limiting Values

Symbol	Parameter	Conditions	Min	Max	Unit
V_{DS}	Drain-Source Voltage	T_A = 25 °C	-	60 V	
V_{GS}	Gate-Source Voltage	T_A = 25 °C	-	± 20 V	
I_D*	Drain Current	T_A = 25 °C, V_{GS} = 10 V	-	0.5 A	
I_{DM}*,**	Pulsed Drain Current	T_A = 25 °C, V_{GS} = 10 V	-	1.7 A	
P_{tot}*	Total Power Dissipation	T_A = 25 °C	-	0.83	W
		T_A = 100 °C	-	0.33	
T_{stg}	Storage Temperature - 55 150				°C
T_J	Junction Temperature - 150				°C
I_S*	Diode Forward Current	T_A = 25 °C	-	0.4 A	
$R_{\theta JA}$*	Thermal Resistance- Junction to Ambient - 150				°C / W


Notes： * Surface Mounted on 1 in$_2$ pad area, t ≤ 10 sec ** Pulse width ≤ 300 μs, duty cycle ≤ 2 %


Electrical Characteristics (T_A = 25 °C Unless Otherwise Noted)


Symbol	Parameter	Conditions	Min	Typ	Max	Unit
Static Characteristics						
BV_{DSS}	Drain-Source Breakdown Voltage	V_{GS} = 0 V, I_{DS} = 250 μA	60	-	-	V
$V_{GS(th)}$	Gate Threshold Voltage	V_{DS} = V_{GS}, I_{DS} = 250 μA	1.0	1.6	2.5	V
I_{DSS}	Drain Leakage Current	V_{DS} = 48 V, V_{GS} = 0 V	-	-	1	μA
		T_J = 85 °C	-	-	30	μA
I_{GSS}	Gate Leakage Current	V_{GS} = ± 20 V, V_{DS} = 0 V	-	-	± 10	μA
$R_{DS(ON)}$ [a]	On-State Resistance	V_{GS} = 10 V, I_{DS} = 0.4 A		1.9	3.0	Ω
		V_{GS} = 4.5 V, I_{DS} = 0.3 A	-	2.4	4.0	
Diode Characteristics						
V_{SD} [a]	Diode Forward Voltage	I_{SD} = 0.4 A, V_{GS} = 0 V	-	0.7	1.3	V
t_{rr}	Reverse Recovery Time	I_{SD} = 0.4 A, dI_{SD} / dt = 100 A / μs	-	40	-	ns
Q_{rr}	Reverse Recovery Charge		-	40	-	nC
Dynamic Characteristics [b]						
R_G	Gate Resistance	V_{GS} = V_{DS} = 0 V, F = 1 MHz	-	130	-	Ω
C_{iss}	Input Capacitance	V_{GS} = 0 V, V_{DS} = 25 V Frequency = 1 MHz	-	30	-	pF
C_{oss}	Output Capacitance		-	4.2	-	
C_{rss}	Reverse Transfer Capacitance		-	3	-	
t_d(on)	Turn-on Delay Time	V_{DS} = 30 V, V_{GEN} = 10 V, R_G = 25 Ω, R_L = 150 Ω, I_{DS} = 0.2 A	-	3.9	9	ns
t_r	Turn-on Rise Time		-	3.5	8	
t_d(off)	Turn-off Delay Time		-	16	40	
t_f	Turn-off Fall Time		-	10	20	
Q_g	Total Gate Charge	V_{GS} = 4.5 V, V_{DS} = 10 V, I_{DS} = 0.4 A	-	305	-	pC
Q_{gs}	Gate-Source Charge		-	85	-	
Q_{gd}	Gate-Drain Charge		-	205	-	


Notes：a : Pulse test ; pulse width ≤ 300 μs, duty cycle ≤ 2 % b : Guaranteed by design, not subject to production testing

Typical Characteristics

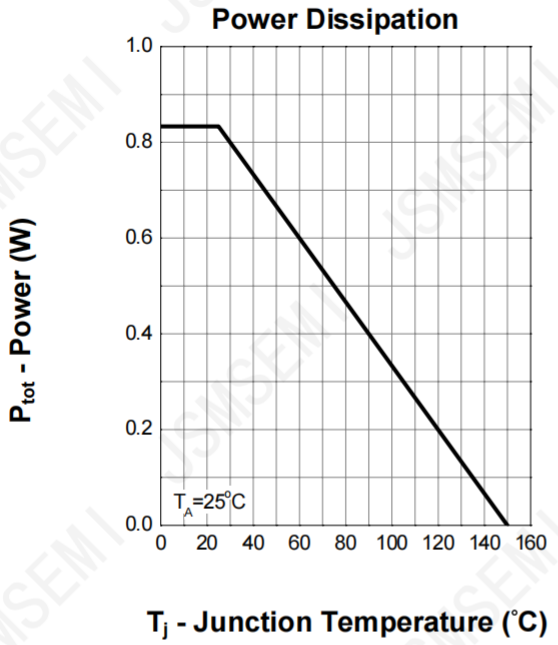

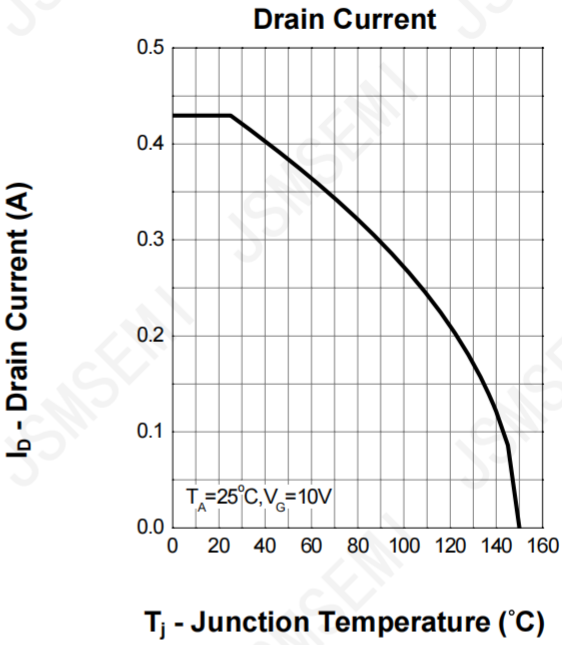


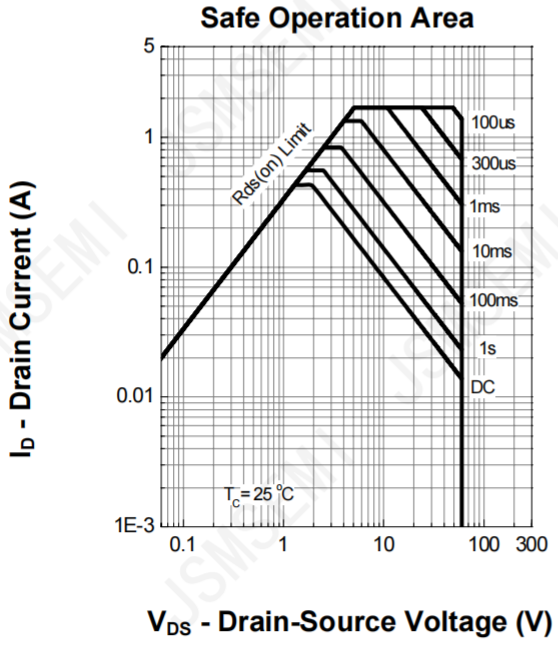

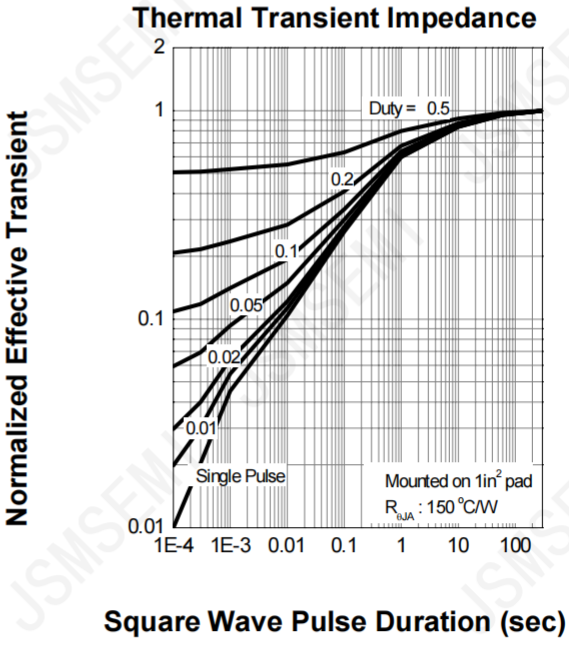


Typical Characteristics (cont.)


Output Characteristics

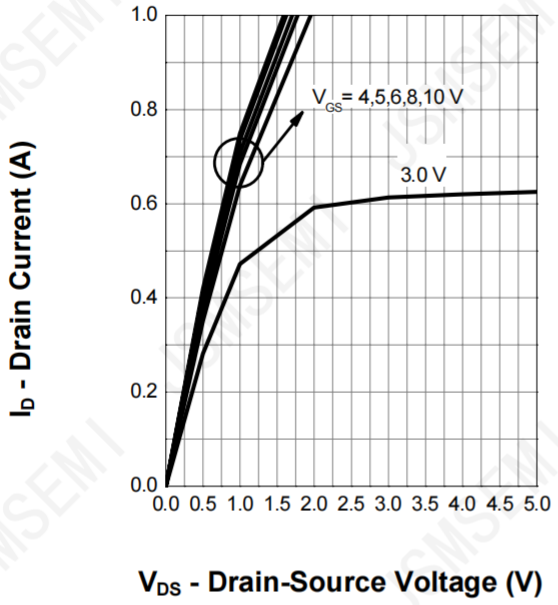


Drain-Source On Resistance

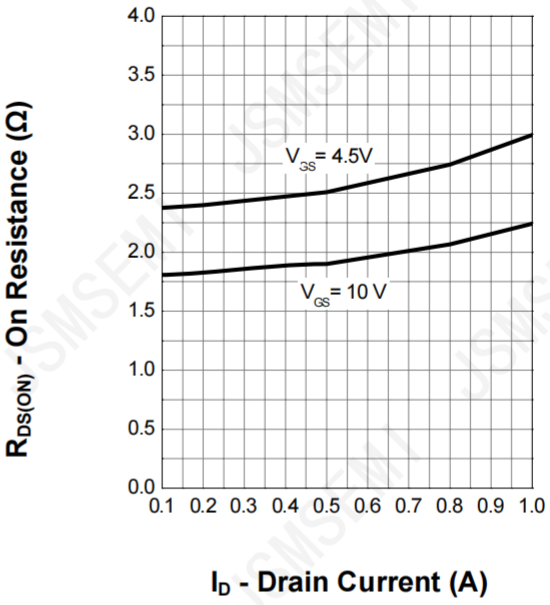


Transfer Characteristics

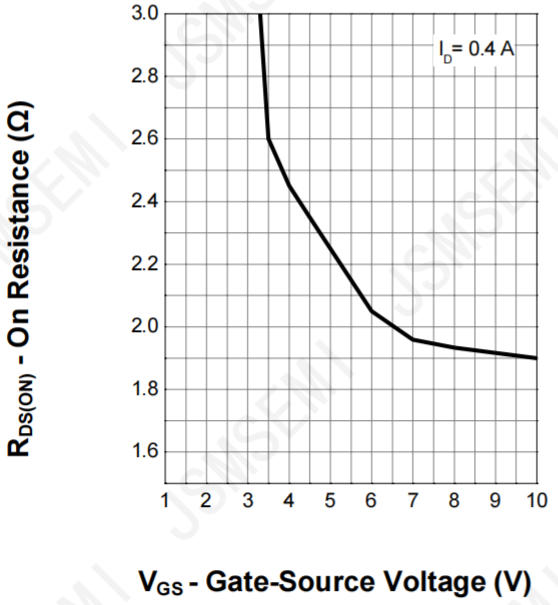



Gate Threshold Voltage

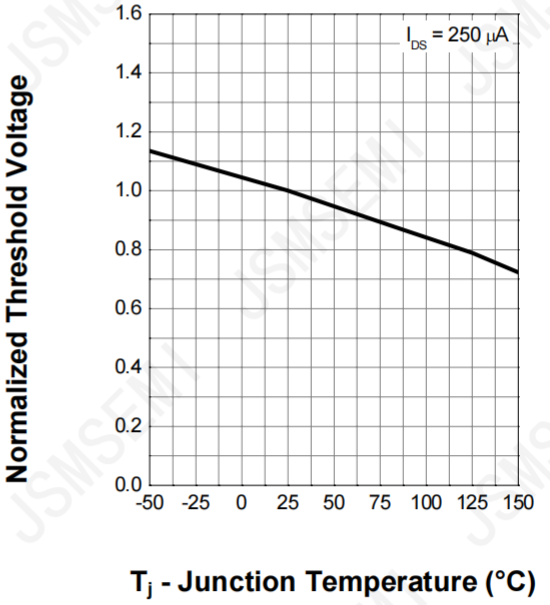


Typical Characteristics (cont.)

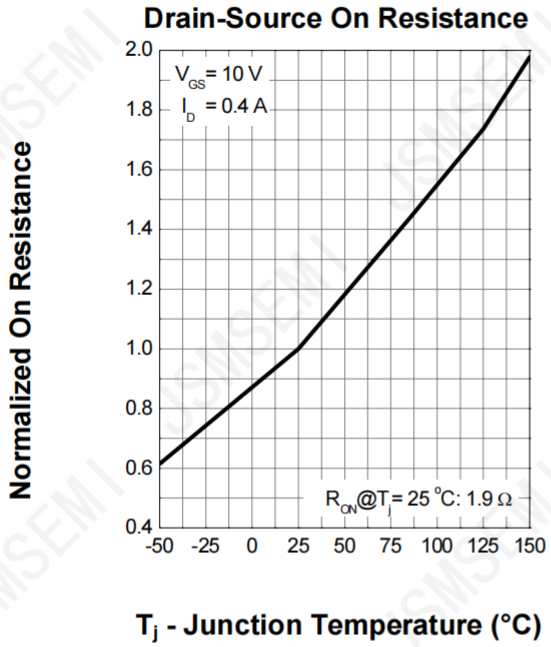

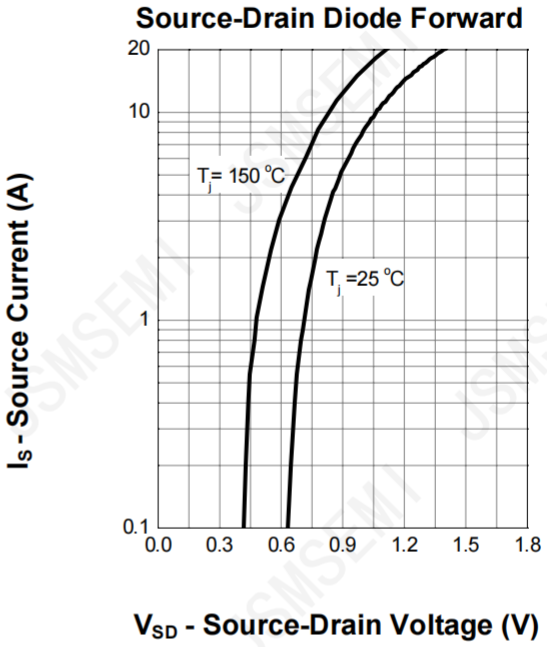


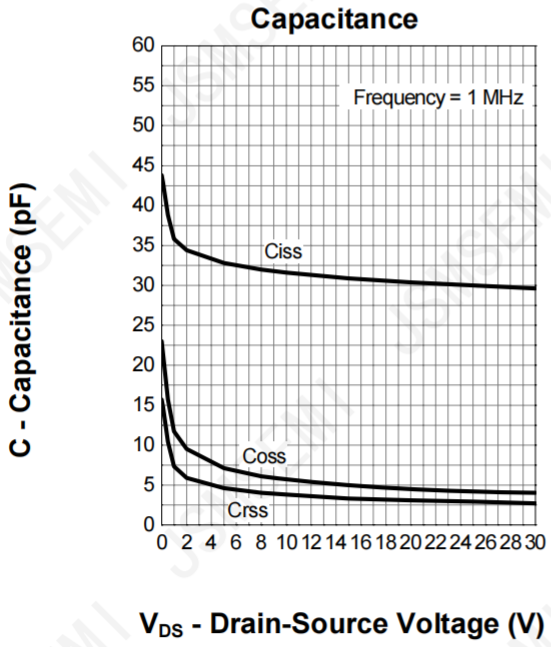

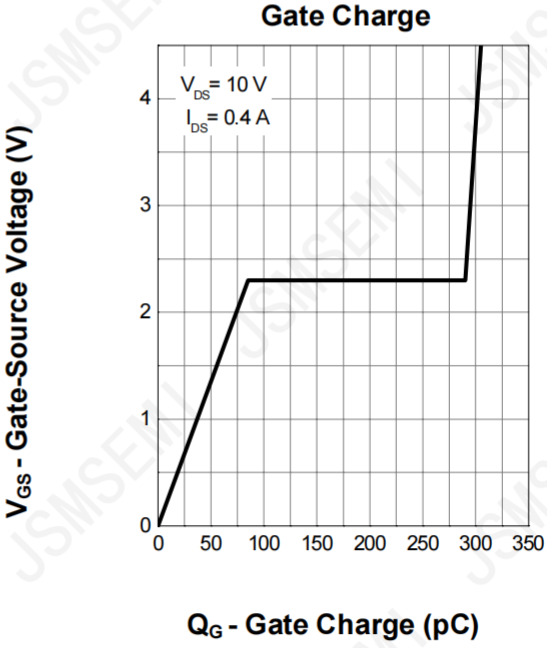

Package Dimensions

SOT-23

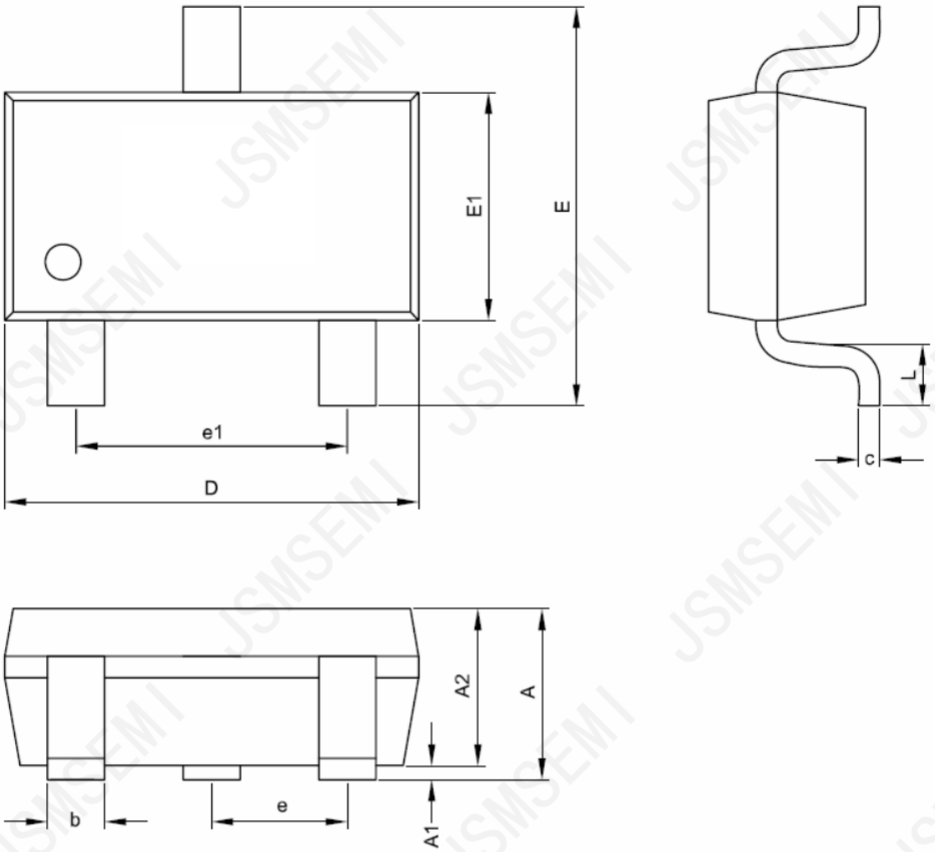

Symbol	Dimensions In Millimeters	
	MIN.	MAX.
A	—	1.12
A1	0.00	0.1
A2	0.90	1.02
D	2.90 BSC	
E	2.40 BSC	
E1	1.20	1.40
c	0.08	0.25
b	0.30	0.50
e	0.95 BSC	
e1	1.90 BSC	
L	0.20	0.60

Revision History

Rev.	Change	Date
V1.0	Initial version	2/23/2024

Important Notice

JSMSEMI Semiconductor (JSMSEMI) PRODUCTS ARE NEITHER DESIGNED NOR INTENDED FOR USE IN MILITARY AND/OR AEROSPACE, AUTOMOTIVE OR MEDICAL DEVICES OR SYSTEMS UNLESS THE SPECIFIC JSMSEMI PRODUCTS ARE SPECIFICALLY DESIGNATED BY JSMSEMI FOR SUCH USE. BUYERS ACKNOWLEDGE AND AGREE THAT ANY SUCH USE OF JSMSEMI PRODUCTS WHICH JSMSEMI HAS NOT DESIGNATED FOR USE IN MILITARY AND/OR AEROSPACE, AUTOMOTIVE OR MEDICAL DEVICES OR SYSTEMS IS SOLELY AT THE BUYER’S RISK.

JSMSEMI assumes no liability for application assistance or customer product design. Customers are responsible for their products and applications using JSMSEMI products.

Resale of JSMSEMI products or services with statements diferent from or beyond the parameters stated by JSMSEMI for that product or service voids all express and any implied warranties for the associated JSMSEMI product or s ervice. JSMSEMI is not responsible or liable for any such statements.

JSMSEMI All Rights Reserved. Information and data in this document are owned by JSMSEMI wholly and may not be edited, reproduced, or redistributed in any way without the express written consent from JSMSEMI.

Any and all information described or contained herein are subject to change without notice due to product/technology improvement, etc.When designing equipment, refer to the "Delivery Specification" for the JSMSEMI product that you intend to use.

For additional information please contact Kevin@jsmsemi.com or visit www.jsmsemi.com