



REV.	DESCRIPTION	ECN NO.	NAME	DATE

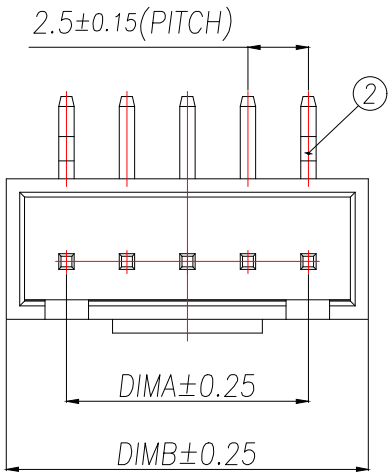





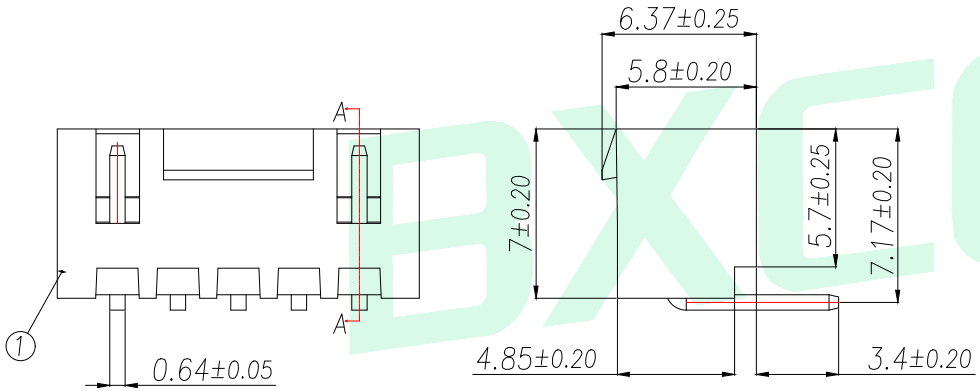


Part No	CKT	A	B
WF-XHB2.54-2PB1	2	2.5	7.5
WF-XHB2.54-3PB1	3	5.0	10.0
WF-XHB2.54-4PB1	4	7.5	12.5
WF-XHB2.54-5PB1	5	10.0	15.0
WF-XHB2.54-6PB1	6	12.5	17.5
WF-XHB2.54-7PB1	7	15.0	20.0
WF-XHB2.54-8PB1	8	17.5	22.5
WF-XHB2.54-9PB1	9	20.0	25.0
WF-XHB2.54-10PB1	10	22.5	27.5
WF-XHB2.54-11PB1	11	25.0	30.0
WF-XHB2.54-12PB1	12	27.5	32.5
WF-XHB2.54-13PB1	13	30.0	35.0
WF-XHB2.54-14PB1	14	32.5	37.5
WF-XHB2.54-15PB1	15	35.0	40.0
WF-XHB2.54-16PB1	16	37.5	42.5

序号	品名	材质
1	HA2.5弯针WTB胶芯	LCP UL94V-0 本色
2	HA2.5弯针WTB端子	铜合金/表面镀锡

技术指标(Technical Index):

1.温度范围(Temperature range):-40°C~+125°C.
2.额定电压(Rated voltage):250V,AC.
3.额定电流(Rated current):3.0A AC,DC.
4.接触电阻(Contact resistance):≤20mΩ.
5.耐压值(Withstanding voltage):1000V AC/minute.
6.绝缘电阻(Insulation resistance):≥1000MΩ.



GENERAL TOLERANCE

DIM.	TOL.
x.	±0.50
x.x	±0.20
x.xx	±0.10
GENERAL	ANGLE:
x.°	±1°

DONGGUAN BAOXUN PRECISION TECHNOLOGY CO., LTD

BXCONN®


TITLE: HA2.5弯针WTB


DWG. NO.: WF-XHB2.54-XPB1 | CHECKED: MAX


PART NO.: WF-XHB2.54-XPB1 | DRAWN: ELLA

UNIT:	SCALE:	SHEET:	DWG. SIZE:	LAYER:	APPROVED:
mm	none	1of 1	A4	bxconn	WILL

REV.	DESCRIPTION	ECN NO.	NAME	DATE

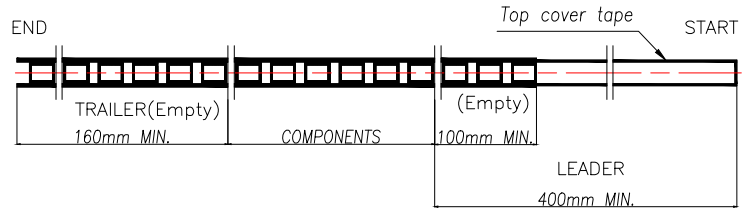


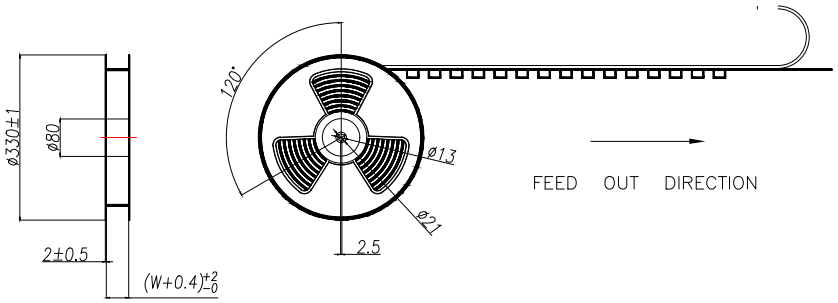


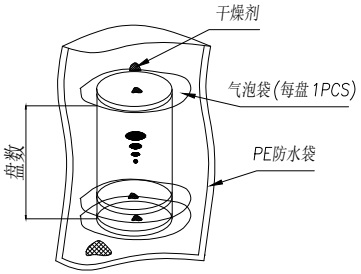


NOTE(注):
1.10 SPROCKET HOLE PITCH CUMULATIVE TOLERANCE ±0.2mm.
(10片孔距累积公差±0.2mm.)
2.CARRIER CAMBER NOT TO EXCEED 1mm IN 100mm.
(载带拱/弧形MAX:1/100mm.)
3.ALL DIMENSIONS MEET EIA-481 REQUIREMENTS.
(所有的尺寸要满足协会EIA-481规范.)
4.MATTRIAL:CLEAR ANTISTATIC PS, COLD SEALING.
(载带材料:透明抗静电 PS,冷封.)
5.THICKNESS:0.50±0.05mm.(载带厚度:0.50±0.05mm.)
6.PACKING LENGHT PER REEL: 6.72METERS.(每卷包装长度:6.72米.)
7.COMPONENT LOAD PER REEL: 400 PCS.(每卷包装数量:400只,前后各空10只.)
8.纸箱装箱以不超过装箱线为准,空余位置用塑料泡沫及保尼龙填充.
9.纸箱分小、中、标准型3种规格型号:装箱为整箱(左下包装量)采用标准型纸箱包装,未达到整箱数量以产品量适当采用小型或中型纸箱包装.


纸箱型号 Carton Type	小型 Small Size	中型 Medium	标准型 Standard
高度 Hight (CM)	7.5	15	32

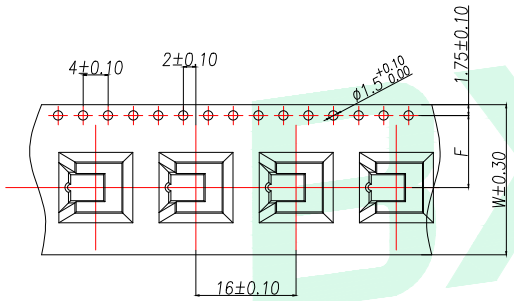







A-A







CKT (2.5mm pitch)	B0	W	F	s
2	7.80	24	11.50	
3	10.30			
4	12.80			
5	15.30	32	14.20±0.10	28.40
6	17.80			
7	20.30	44	20.20±0.10	40.40
8	22.80			
9	25.30			
10	27.80			
11	30.30			
12	32.80	56	26.2±0.10	52.40
13	35.30			
14	37.80			
15	40.30			
16	42.80			

CKT (2.5mm pitch)	W	PCS/RELL	RELL/CARTON	SUM(PCS)
2	24	350	10	3500
3				
4				
5	32	350	8	2800
6				
7	44	350	6	2100
8				
9				
10				
11				
12	56	350	5	1750
13				
14				
15				
16				

GENERAL TOLERANCE

DIM.	TOL.
x.	±0.50
x.x	±0.25
x.xx	±0.15
GENERAL ANGLE:	
X.°	±1°

DONGGUAN BAOXUN PRECISION TECHNOLOGY CO., LTD

BXCONN®

TITLE: HA2.5弯针WTB载带

DWG. NO.: WF-XHB2.54-XPB1

CHECKED: MAX

PART NO.: WF-XHB2.54-XPB1

DRAWN: ELLA

UNIT:	SCALE:	SHEET:	DWG. SIZE:	LAYER:
mm	none	1of 1	A4	bxconn

APPROVED: WILL