


由 Foxit PDF Editor 编辑
版权所有 (c) by Foxit 公司, 2003 - 2010
仅用于评估。


RoHS Compliant


SYMBOL			

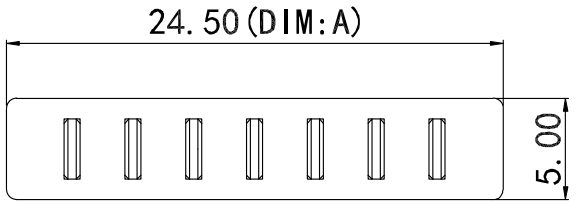

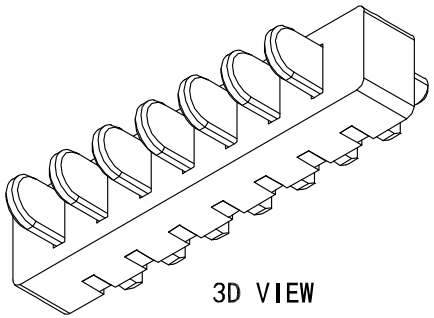

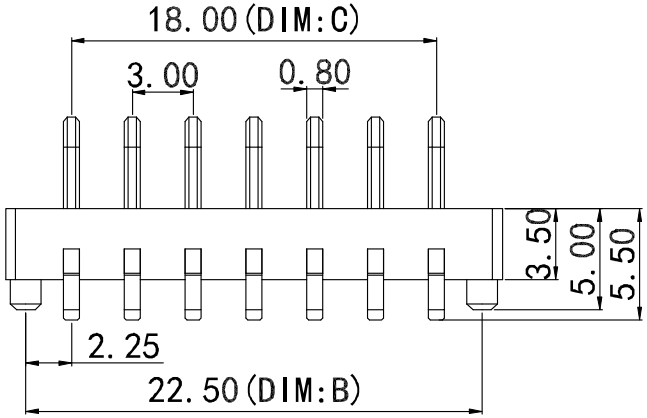

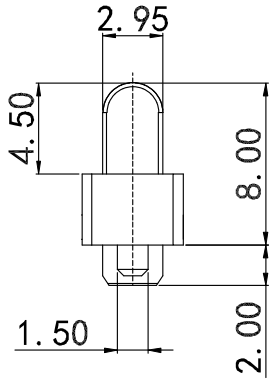

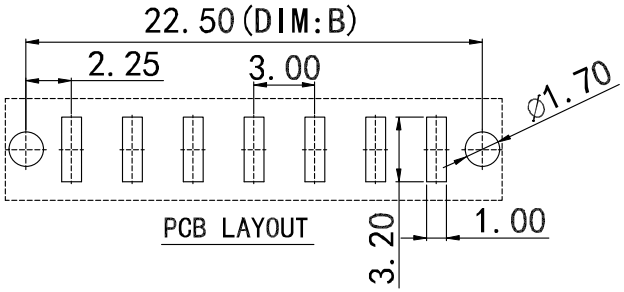

SPECIFICATIONS

1. ELECTRICAL CHARACTERISTICS:
   1-1. RATING: DC 12V 15A / Pin
   1-2. CONTACT RESISTANCE: 30mΩ
   1-3. DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR ONE MINUTE
   1-4. INSULATION RESISTANCE: 500MΩ , MEASURED BY 500V DC
2. LIFE TEST:MECHANICAL LIFE TEST 5,000 CYCLES.
3. TEMPERATURE RISE : 30° C MAX

规格型号	DIM:A	DIM:B	DIM:C
JME-DC30-A-2P-R1-B	9.50	7.50	3.00
JME-DC30-A-3P-R1-B	12.50	10.50	6.00
JME-DC30-A-4P-R1-B	15.50	13.50	9.00
JME-DC30-A-5P-R1-B	18.50	16.50	12.00
JME-DC30-A-6P-R1-B	21.50	19.50	15.00
JME-DC30-A-7P-R1-B	24.50	22.50	18.00
JME-DC30-A-8P-R1-B	27.50	25.50	21.00
JME-DC30-A-9P-R1-B	30.50	28.50	24.00
JME-DC30-A-10P-R1-B	33.50	31.50	27.00
JME-DC30-A-11P-R1-B	36.50	34.50	30.00
JME-DC30-A-12P-R1-B	39.50	37.50	33.00

NO.	PARTS	MATERIAL	QTY.	FINISHING
2	HOUSING	PA9T	1	BLACK
1	CONTACT TERMINAL	HIGH CONDUCTIVITY COPPER	7	Au PLATED

深圳市文章济美科技有限公司

PART NAME	CONNECTOR	DRAWING	Y. C. Zhang	DWG. No.	
PART NO.	JME-DC30-A-XXP-R1-B	CHECK	G. C. Chen	REV.	A1
UNIT: mm	TOLERANCE OTHERWISE X. ±0.15 X.X ±0.10 X.XX ±0.05 X.XXX ±0.005 X.° ±1° X.X° ±0.5° X.XX° ±0.05° X.XXX° ±0.005°	ANGLE 0° ±3°	APPROVAL	DATE	12-12-2022
			SCALE 3:1	PAGE	1 OF 1

COPYRIGHT RESERVED, PLEASE DO NOT COPY.