



版次	变更摘要	日期
0	新产品发行	2017/01/02
1	胶芯主体设变改善成品共面度	2018/08/22
2	更改焊片料带结构,提升组装折料带效率	2021/07/13

序号	品名	材质
①	2.00 F型立式WTB胶芯 2.00Pitch S/T Wire To Board Housing(H=6.8)	LCP UL94V-0 本色 **Natural**
②	2.00 F型立式WTB端子 2.00 Pitch S/T Wire To Board Terminal(H=6.8)	铜合金/表面镀锡 Copper Alloy/ Tin Plating
③	2.00 F型立式WTB焊片 2.00 Pitch S/T Wire To Board Fitting Nail(H=6.8)	铜合金/表面镀锡 Copper Alloy/ Tin Plating
④	2.00 F型立式WTB吸盖 2.00 Pitch S/T Wire To Board Cover(H=6.8)	LCP UL94V-0 本色 **Natural**

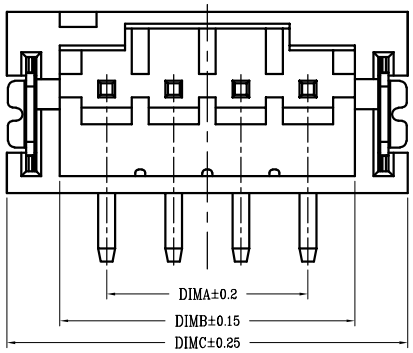

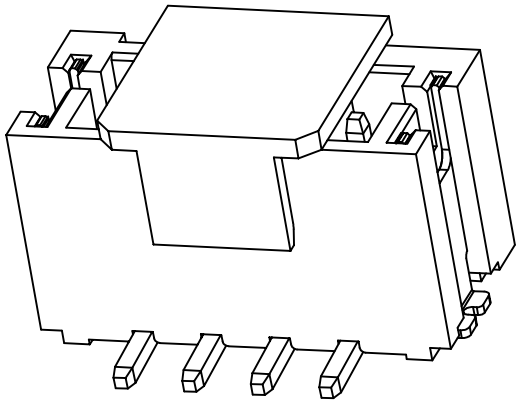

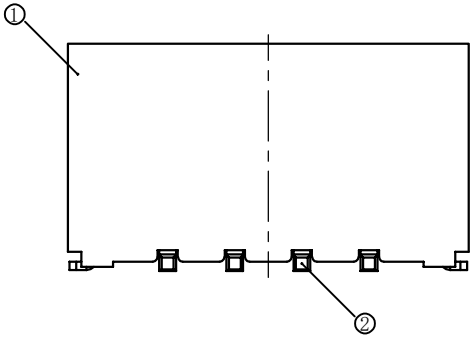

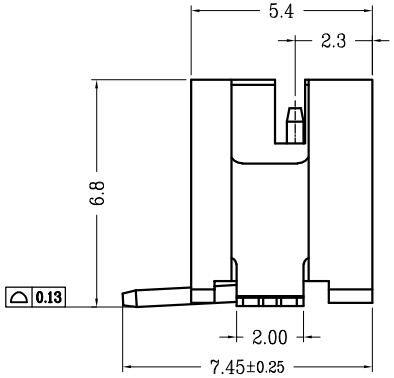



技术指标(Technical Index):


1. 塑件表面应光洁、无毛边、无明显收缩、缺陷、裂纹等现象.
(The surface of the plastic parts should be smooth, no rough edges, no obvious shrinkage, defects, cracks and other phenomena)
2. 不同pin位吸盖加入/取出力有差异，实属正常现象.
（It is normal than there are difference between suction cap and suction cap at different Pin postitions)
3. 温度范围(Temperature range)：-40° C～85° C.
4. 额定电压(Rated voltage)：200V，AC.
5. 接触电阻(Contact resistance)：
≤55mΩ（initial) per contact,≤25mΩ Change allowed.
6. 绝缘电阻(Insulation resistance):≥1000MΩ.
7. 产品料号(Product material No.)：

5001 － PH 0020 B －** R 1-00
- PH: JM CONNECTOR SERIES
- 0020: PITCH:2.0
- B: B:立贴
- **: PIN
- R: PACKING:R:卷;T:管
- 1-00: ALTERNATE

CKT	DIM A	DIM B	DIM C
2	2.00	4.80	7.95
3	4.00	6.80	9.95
4	6.00	8.80	11.95
5	8.00	10.80	13.95
6	10.00	12.80	15.95
7	12.00	14.80	17.95
8	14.00	16.80	19.95
9	16.00	18.80	21.95
10	18.00	20.80	23.95
11	20.00	22.80	25.95
12	22.00	24.80	27.95
13	24.00	26.80	29.95
14	26.00	28.80	31.95
15	28.00	30.80	33.95
16	30.00	32.80	35.95
17	32.00	34.80	37.95
18	34.00	36.80	39.95
19	36.00	38.80	41.95
20	38.00	40.80	43.95

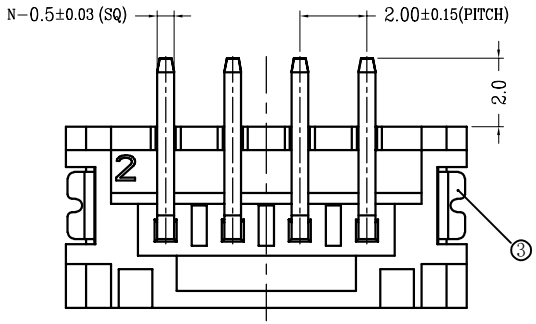

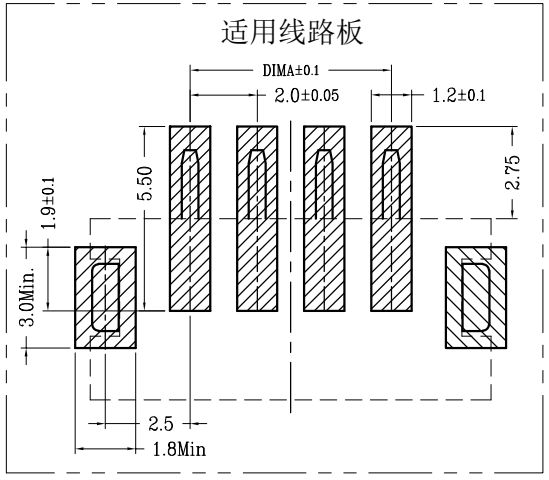

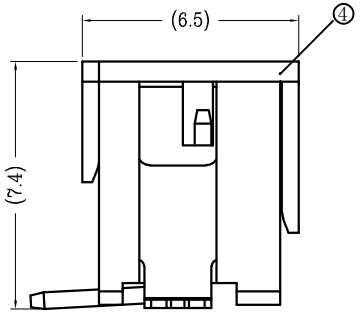

WITH COVER

RoHS

一般公差(TOLERANCE)
X. ±.50 .XX ±.10
.X ±.20 .XXX ±.05
ANGLES ±1°

深圳市文章济美科技有限公司

品名 (TITLE)	2.00 Pitch F型立式WTB	制图 (DR)	ANLAN
料号 (DWG.NO)	5001-PH0020B-**R1-00-B	校对 (CHKD)	李绍宗
比例 (SCALE)	1:1	审核 (APPD)	黄志明
单位 (UNITS)	mm	张数 (SHEET)	1 OF 1
		SIZE	A4
		REV	A