旭昌辉半导体
XUCHANGHUI Semiconductor

MUR880


POLYIMIDE PASSIVATED SUPER FAST RECTIFIER


Reverse Voltage - 800 Volts
Forward Current - 8.0Amperes

FEATURES

- Plastic package has Underwriters Laboratory Flammability Classification 94V-0
- Fast switching for high efficiency
- Low forward voltage drop
- Single rectifier construction
- High surge capability
- For use in low voltage ,high frequency inverters, free wheeling ,and polarity protection applications
- High temperature soldering guaranteed:260°C/10 seconds, 0.25"(6.35mm)from case
- Component in accordance to RoHS 2011/65/EU

TO-220AC





MECHANICAL DATA

- Case: JEDEC TO-220AC, molded plastic body
- Terminals: Lead solderable per MIL-STD-750,method 2026
- Polarity: As marked
- Mounting Position: Any

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

(Ratings at 25°C ambient temperature unless otherwise specified ,Single phase ,half wave ,resistive or inductive load. For capacitive load,derate by 20%.)

Parameter		Symbols	Value				Units
Maximum repetitive peak reverse voltage		V_{RRM}	800				Volts
Maximum RMS voltage		V_{RMS}	560				Volts
Maximum DC blocking voltage		V_{DC}	800				Volts
Maximum average forward rectified current(see Fig.1)		$I_{(AV)}$	8.0				Amps
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC method)		I_{FSM}	80				Amps
Forward voltage (note 1)	I_F=3A	V_F	TYP.	1.4	MAX.	/	Volts
	I_F=5A		TYP.	1.6	MAX.	/	
	I_F=8A		TYP.	1. 7	MAX.	2. 4	
Reverse current at rated DC blocking voltage(Note 1)	T_A=25°C	I_R	TYP.	–	MAX.	5	μA
	T_A=125°C		TYP.	–	MAX.	50	
Maximum Reverse Recovery Time (Note 2)		Trr	45 (TYP30)				ns
Typical thermal resistance		$R_{\theta JC}$	2.5				°C/W
Operating junction temperature range		T_J	-55 to+175				°C
Storage temperature range		T_{STG}	-55 to+175				°C

Notes: 1. Pulse test: 300μs pulse width,1% duty cycle
2. Reverse recovery test conditions I_F=0.5A,I_R=1.0A, Irr=0.25A

RATINGS AND CHARACTERISTIC CURVES

FIG.1-FORWARD CURRENT DERATING CURVE

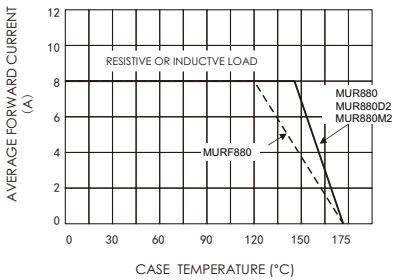


FIG.2-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

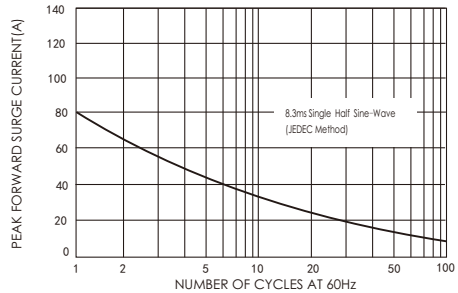


FIG.3-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS


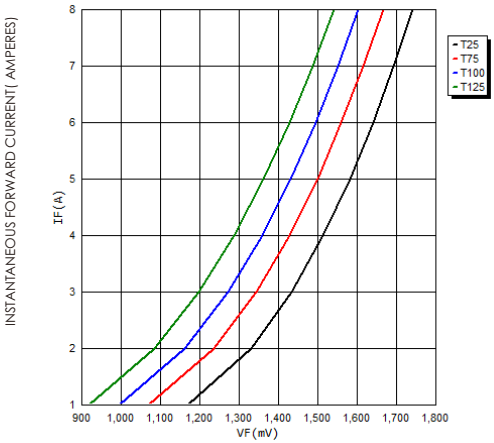


FIG.4-TYPICAL REVERSE CHARACTERISTICS



PACKAGE OUTLINE DIMENSIONS

TO-220AC

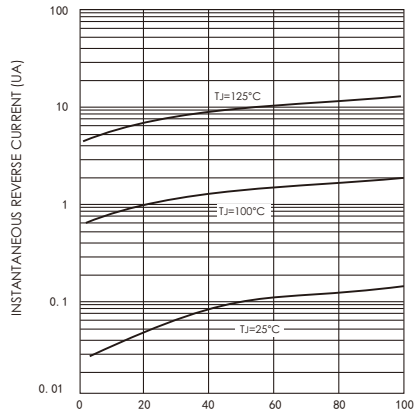