
Features

- 30V, 30A
  $R_{DS(ON)}$ Typ= 8.5mΩ @ V_{GS} = 10V
  $R_{DS(ON)}$ Typ= 15mΩ @ V_{GS} = 4.5V
- Advanced Trench Technology
- Excellent $R_{DS(ON)}$ and Low Gate Charge




TO-252-3L


Applications

- Load Switch
- PWM Application
- Power Management

100% UIS TESTED!
100% ΔVds TESTED!



Pin Assignment



Schematic Diagram

Absolute Maximum Ratings (@ T_J = 25°C unless otherwise specified)

Symbol	Parameter		Value	Units
V_{DS}	Drain-to-Source Voltage		30	V
V_{GS}	Gate-to-Source Voltage		±20	V
I_D	Continuous Drain Current	T_C = 25°C	30	A
		T_C = 100°C	18	
I_{DM}	Pulsed Drain Current (1)		120	A
E_{AS}	Single Pulsed Avalanche Energy (2)		64	mJ
P_D	Power Dissipation	T_C = 25°C	26	W
$R_{\theta JC}$	Thermal Resistance, Junction to Case		4.9	°C/W
T_J, T_{STG}	Junction & Storage Temperature Range		-55 to 150	°C

Electrical Characteristics (T_J = 25°C unless otherwise specified)

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
Off Characteristics						
$V_{(BR)DSS}$	Drain-Source Breakdown Voltage	I_D = 250μA, V_{GS} = 0V	30	-	-	V
I_{DSS}	Zero Gate Voltage Drain Current	V_{DS} = 30V, V_{GS} = 0V	-	-	1.0	μA
I_{GSS}	Gate-Body Leakage Current	V_{DS} = 0V, V_{GS} = ±20V	-	-	±100	nA
On Characteristics						
$V_{GS(th)}$	Gate Threshold Voltage	V_{DS} = V_{GS}, I_D = 250μA	1.1	1.5	2.1	V
$R_{DS(ON)}$	Static Drain-Source ON-Resistance(3)	V_{GS} = 10V, I_D = 20A	-	8.5	15.0	mΩ
		V_{GS} = 4.5V, I_D = 10A	-	15.0	22.5	mΩ
Dynamic Characteristics						
C_{iss}	Input Capacitance	V_{GS} = 0V, V_{DS} = 15V, f = 1MHz	-	748	-	pF
C_{oss}	Output Capacitance		-	102	-	pF
C_{rss}	Reverse Transfer Capacitance		-	85	-	pF
Q_g	Total Gate Charge	V_{GS} = 0 to 10V, V_{DS} = 15V, I_D = 15A	-	16	-	nC
Q_{gs}	Gate Source Charge		-	3.6	-	nC
Q_{gd}	Gate Drain("Miller") Charge		-	3.4	-	nC
Switching Characteristics						
$t_{d(on)}$	Turn-On DelayTime	V_{GS} = 10V, V_{DD} = 15V, I_D= 15A, R_{GEN} = 3Ω	-	6	-	ns
t_r	Turn-On Rise Time		-	16	-	ns
$t_{d(off)}$	Turn-Off DelayTime		-	17	-	ns
t_f	Turn-Off Fall Time		-	5	-	ns
Drain-Source Diode Characteristics and Max Ratings						
I_S	Maximum Continuous Drain to Source Diode Forward Current		-	-	30	A
I_{SM}	Maximum Pulsed Drain to Source Diode Forward Current		-	-	120	A
V_{SD}	Drain to Source Diode Forward Voltage	V_{GS} = 0V, I_S = 10A	-	-	1.2	V
trr	Body Diode Reverse Recovery Time	I_F = 13A, di/dt = 100A/us	-	9.4	-	ns
Qrr	Body Diode Reverse Recovery Charge		-	3.3	-	nC

Notes: 1. Repetitive Rating: Pulse Width Limited by Maximum Junction Temperature.

2. E_{AS} condition: Starting T_J=25C, V_{DD}=15V, V_G=10V, R_G=25ohm, L=0.5mH, I_{AS}=16A

3. Pulse Test: Pulse Width≤300μs, Duty Cycle≤0.5%.

Typical Performance Characteristics

Figure 1: Output Characteristics

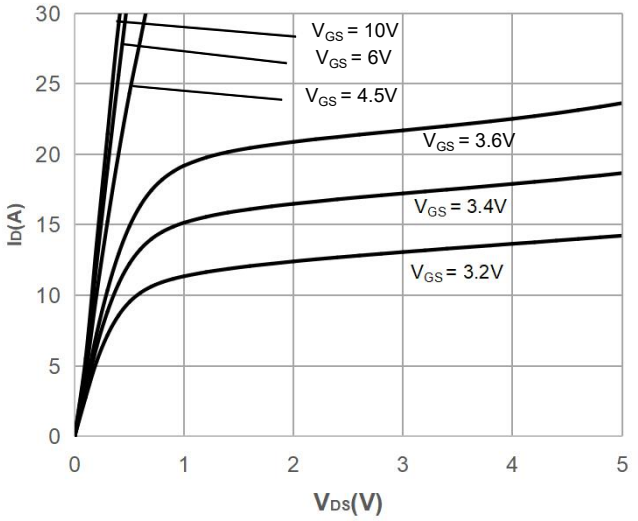


Figure 2: Typical Transfer Characteristics

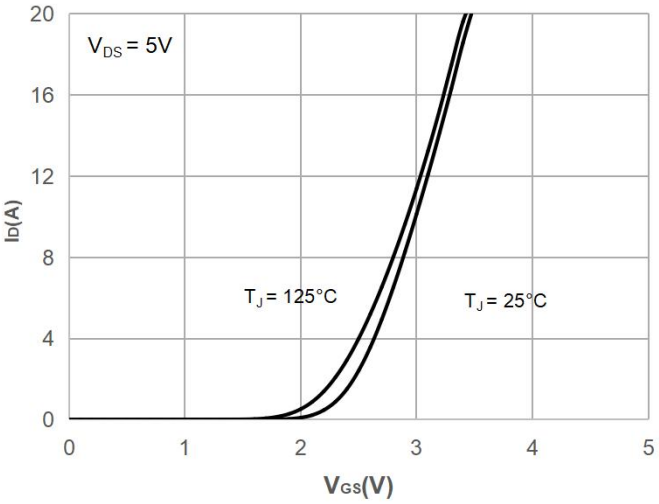


Figure 3: On-resistance vs. Drain Current

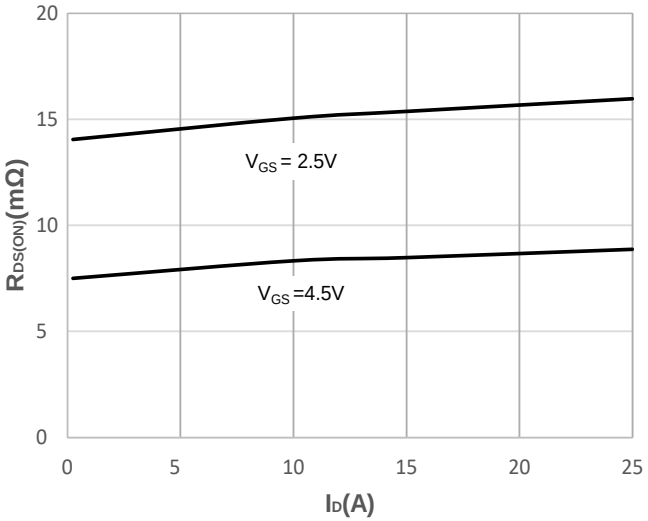


Figure 4: Body Diode Characteristics

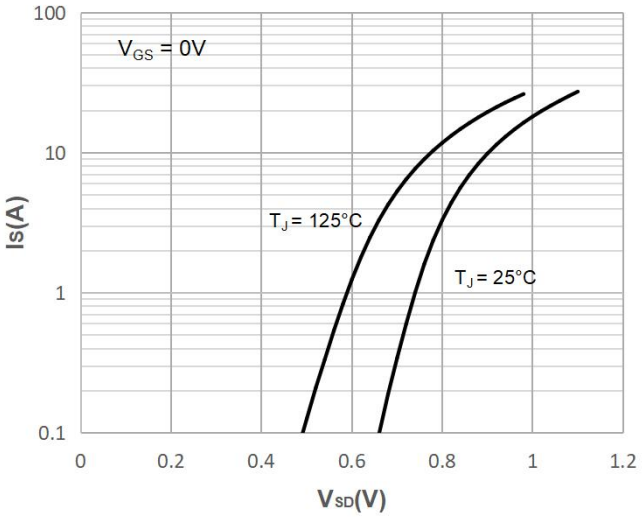


Figure 5: Gate Charge Characteristics


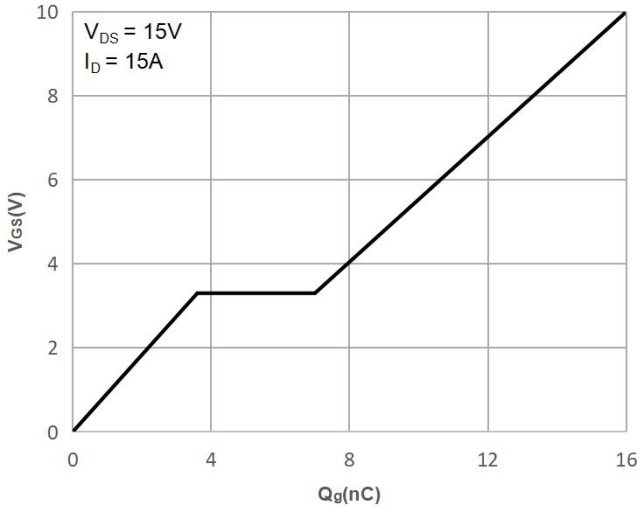


Figure 6: Capacitance Characteristics

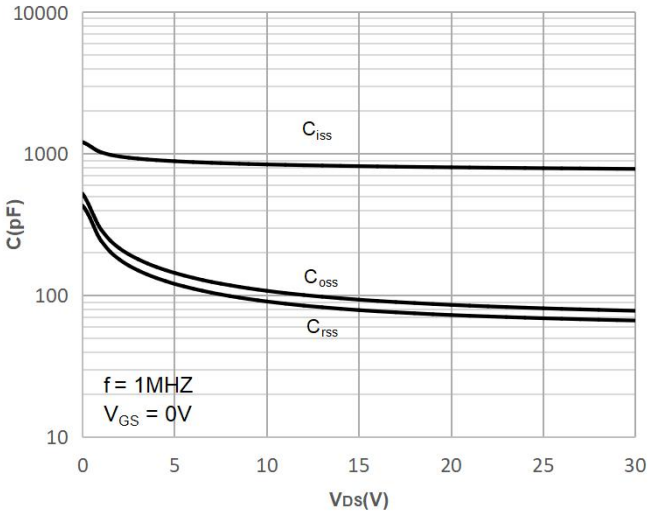

Typical Performance Characteristics

Figure 7: Normalized Breakdown voltage vs. Junction Temperature

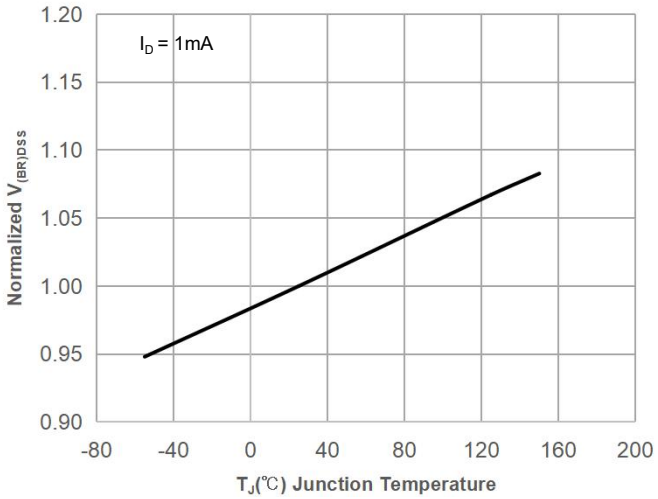


Figure 8: Normalized on Resistance vs. Junction Temperature

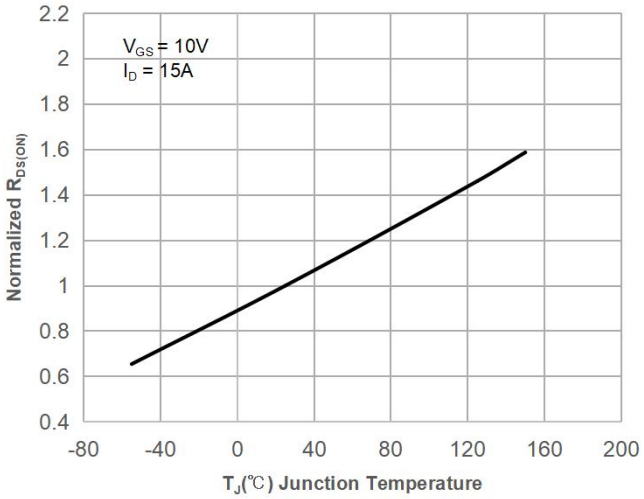


Figure 9: Maximum Safe Operating Area

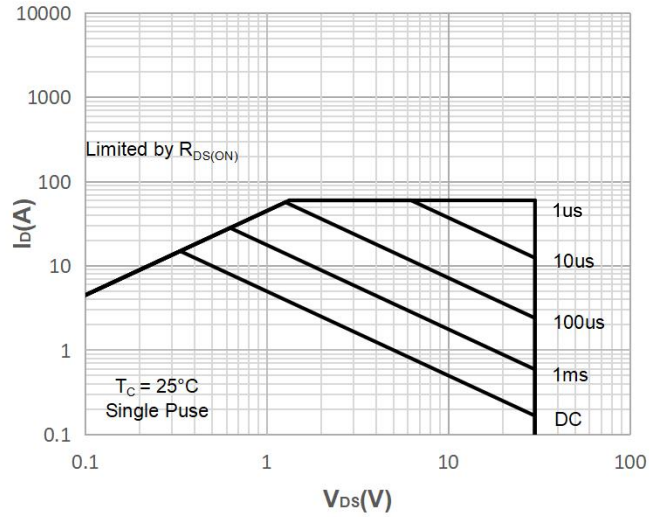


Figure 10: Maximum Continuous Drian Current vs. Case Temperature

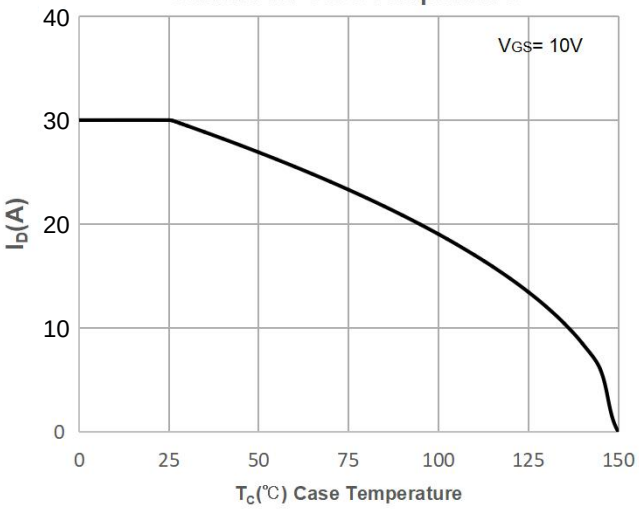


Figure 11: Normalized Maximum Transient Thermal Impedance


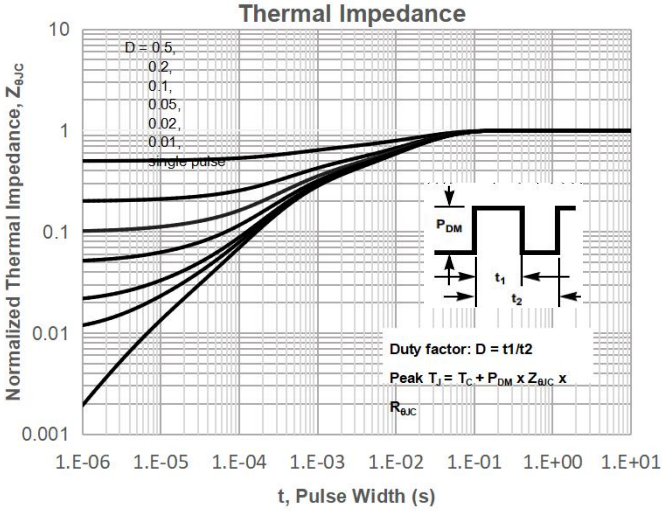


Figure 12: Peak Current Capacity

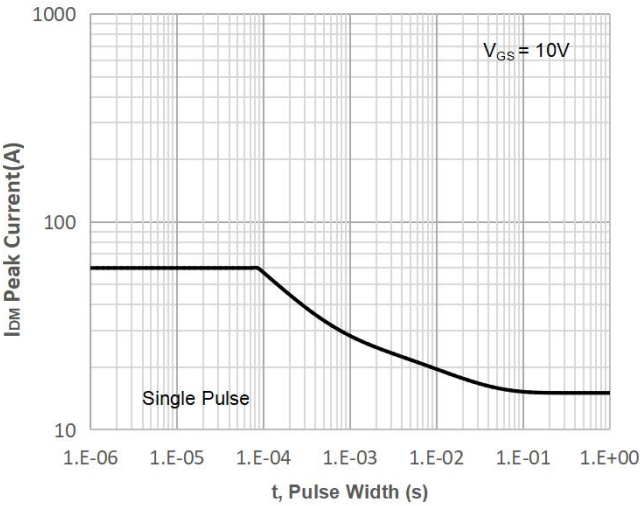

Test Circuit

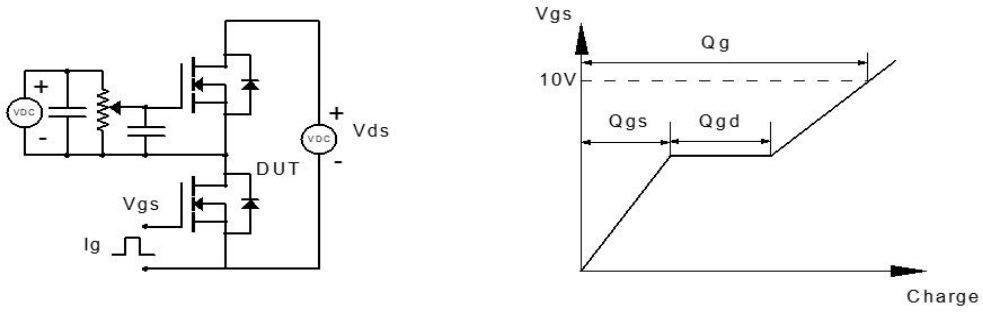


Figure 1: Gate Charge Test Circuit & Waveform

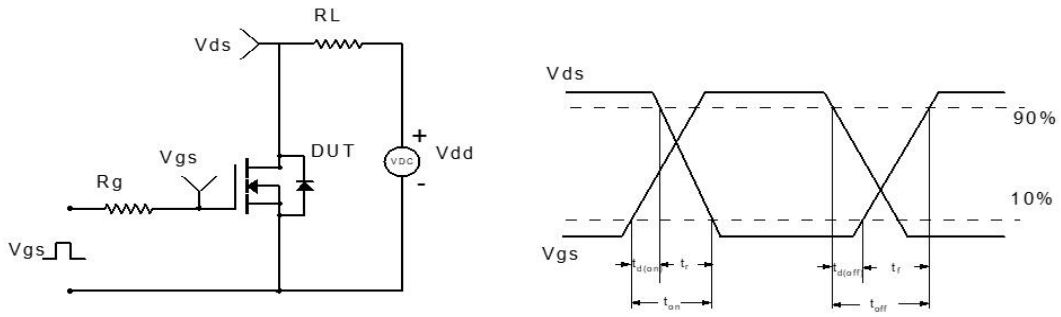


Figure 2: Resistive Switching Test Circuit & Waveform

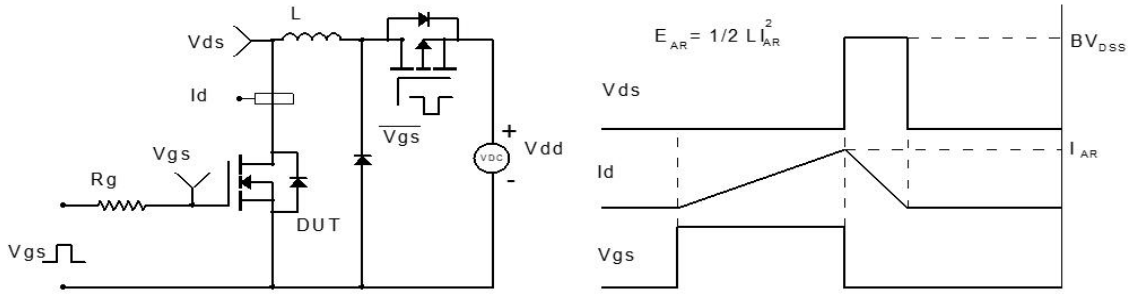


Figure 3: Unclamped Inductive Switching Test Circuit& Waveform


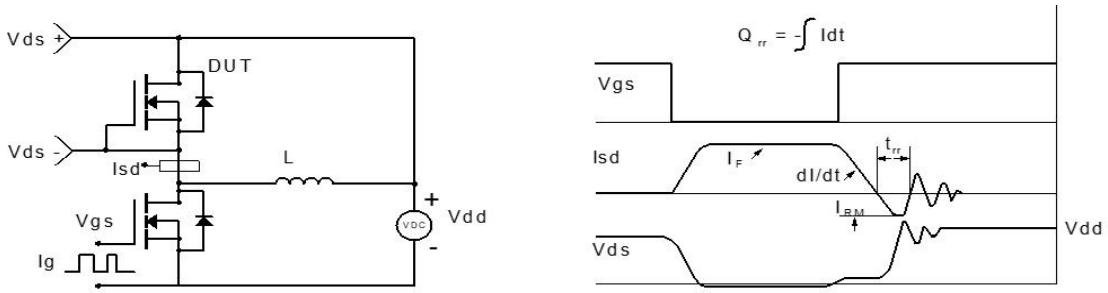


Figure 4: Diode Recovery Test Circuit & Waveform

Package Mechanical Data(TO-252-3L)

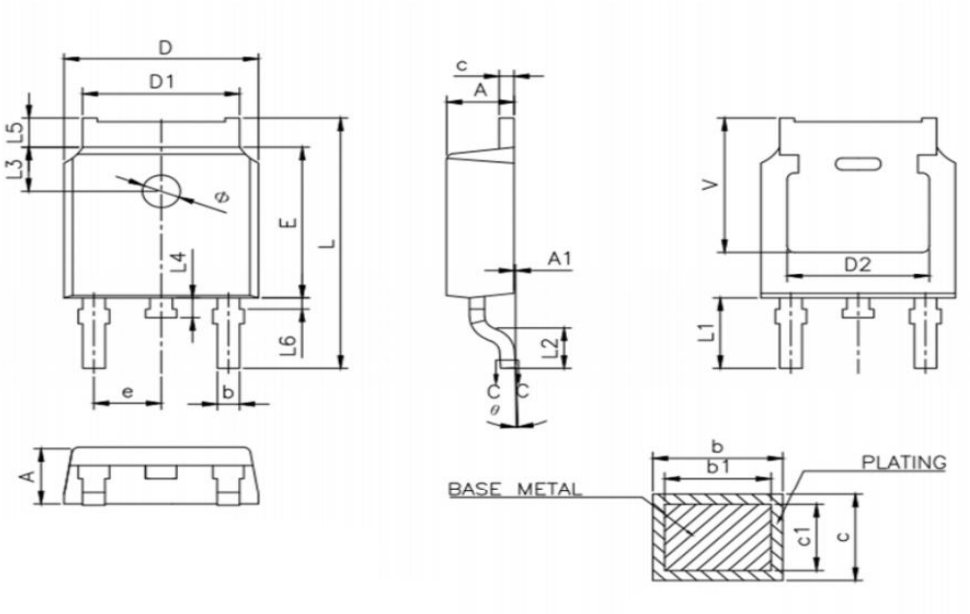

SYMBOL	MILLIMETER		
	MIN	NOM	MAX
A	2.20	2.30	2.40
A1	0.00	--	0.127
b	0.66	--	0.86
b1	0.65	0.76	0.81
D	6.50	6.60	6.70
D1	5.10	5.33	5.46
c	0.47	--	0.60
c1	0.46	0.51	0.56
D2	4.83 REF.		
E	6.00	6.10	6.20
e	2.186	2.286	2.386
L	9.80	10.10	10.40
L1	2.90 REF.		
L2	1.40	1.50	1.60
L3	1.80 REF.		
L4	0.60	0.80	1.00
L5	0.90	--	1.25
L6	0.15	--	0.75
Φ	1.10	--	1.30
θ	0°	--	8°
V	5.40 REF		