1-Line Unidirectional ESD Protection Diode



General description

Unidirectional ElectroStatic Discharge (ESD) protection diode in a SOD523 plastic package designed to protect one transmission or data line from the damage caused by ESD and other transients

Features and benefits

- Unidirectional ESD protection of one line
- Reverse stand-off voltage: 15V Max
- Low leakage current: nA Level
- Response time is typically < 1 ns
- Low clamping voltage: V_C =24 V @ I_{PP} = 5 A (TYP)
- ESD Protection: 15kV(air)/ 8kV(contact) (IEC61000-4-2)
- Surge Protection: 5 A (IEC 61000-4-5 8/20 μs)



Application information

- Cellular phones
- Portable devices
- Digital cameras
- Power supplies

Ordering information

Device	Package	Packaging	Reel Size
SLESD5S15	SOD523	3000/Tape & Reel	7 Inch

Schematic & Pin configuration

Simplified outline	Graphic symbol
	

Maximum Ratings (T_{OP} = 25 °C, unless otherwise specified)


Parameter	Symbol	Value	Unit
Peak Pulse Power (tp = 8/20 μ s)	P_{PPM}	130	W
Peak Pulse Current(tp = 8/20 μ s)	I_{PPM}	5.0	A
Maximum lead temperature for soldering during 10s	T_L	260	°C
Storage Temperature Range	T_{stg}	-55 to +150	°C
Operating Temperature Range	T_{OP}	-40 to +125	°C
Maximum junction temperature	T_j	150	°C
ESD voltage IEC 61000-4-2 (air discharge)	V_{ESD}	15	kV
ESD voltage IEC 61000-4-2 (contact discharge)	V_{ESD}	8	kV

Electrical Characteristics (T_{OP} = 25 °C, unless otherwise specified)

Parameter	Symbol	Min	Typ	Max	Unit	Condition
Reverse Working Voltage	V_{RWM}	--	--	15.0	V	
Breakdown Voltage	V_{BR}	16.0	--	19.0	V	I_T=1mA
Forward Voltage	V_F	0.7	0.8	0.9	V	I_F=10mA
Leakage Current ILeak	I_R	--	--	100	nA	V_{RWM}=15V
Clamping Voltage	V_C	--	24	26	V	I_{PP}=5.0A,Tp=8/20μs
Junction Capacitance	C_J	--	28	35	pF	V_R=0V, f=1MHz


Portion Electronics Parameter

Symbol	Parameter
I_{PP}	Maximum Reverse Peak Pulse Current
V_C	Clamping Voltage @ I_{PP}
V_{RWM}	Working Peak Reverse Voltage
I_R	Reverse Leakage Current @ V_{RWM}
I_T	Test Current
V_{BR}	Breakdown Voltage @ I_T
I_F	Forward Current
V_F	Forward Voltage @ I_F

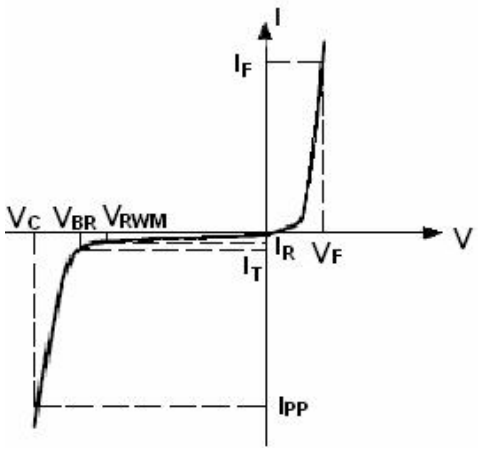

Package Outline Dimensions

SOD523

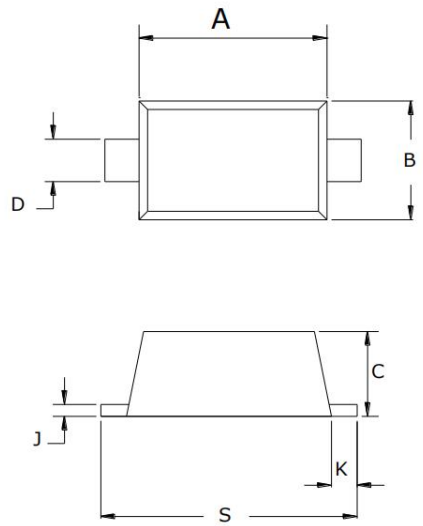

SYMBOL	MILLIMETERS		
	MIN	NOR	MAX
A	1.10	1.20	1.30
B	0.70	0.80	0.90
C	0.60	0.65	0.70
D	0.25	0.30	0.35
J	0.08	0.11	0.15
K	0.15	0.20	0.25
S	1.50	1.60	1.70

Soldering Footprint (mm)

