

HAOYU

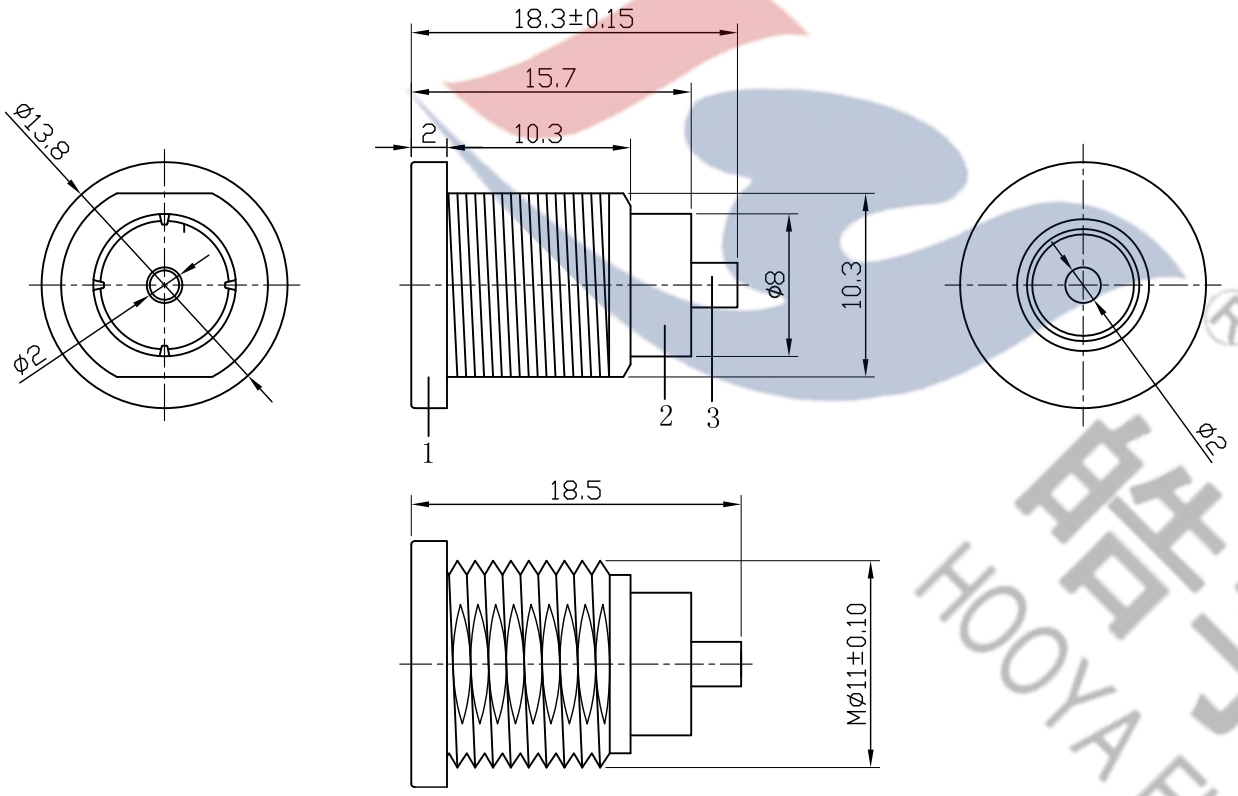

SCHEMATIC

Tel：0769-82310511-867

SPECIFICATION

1. Rating ： DC 30V 0.5A.
2. Contact resistance: ≤50mΩ.
3. Insulation resistance: ≥100MΩ (DC250V).
4. Withstanding voltage: 500VAC .
5. Insertion and extraction force: 3-30N.
6. life test: 5,000 cycles.
7. Operation temperature range:-25℃～85℃.
8. Sign"* "is importance dimension.

| NO. | PART NAME | MATERIAL | QTY | FINISHING |
|---|---|---|---|---|
| 3 | PIN | BRASS | 1 | Sn-PLATED |
| 2 | SHELL | BRASS | 1 | Sn-PLATED |
| 1 | HOUSING | PA66 | 1 | BLACK |

| TOLERANCE UNLESS SPECIFIED | | NO | DATE | REVISIONS | BY | APPD |
|---|---|---|---|---|---|---|
| <1.5: ±0.1mm<br>>1.5~5.0: ±0.25mm<br>>5.0: ±0.3mm | ANGULAR ±1° | | | | | |

| | | | |
|---|---|---|---|
| TITLE: DC JACK | UNIT : MM | ROHS COMPLIANT | DWN |
| MODEL: DC-022L-2.0-09 | SCALE: 1:1 | | CHK'D |
| | | | APPD |

DONGGUANG HAOYU ELECTRONICS CO., LTD
东莞市弘皓电子有限公司

PRO.AGL: REV :A0