


REV.	DESCRIPTION	ECN NO.	NAME	DATE

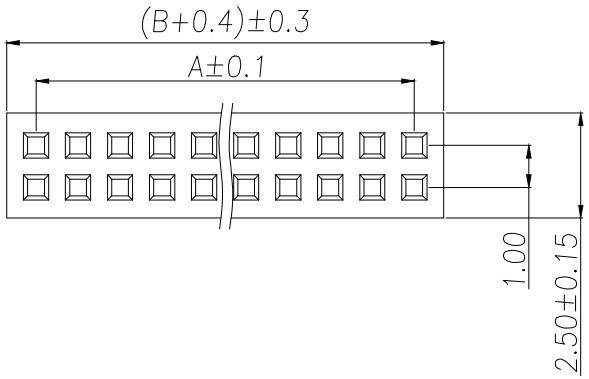

SPECIFICATIONS
Current Rating:0.75 Amps
Withstanding Voltage:AC 500V
Insulation Resistance:1000MΩ Min
Contact Resistance:20mΩ Max
Operation Temperature:-40°to+105°
Insrlator Material:Polyester(UL94V-0)
Contact Material:Phosphor bronze
Standard:PA6T
Contact Plating:Gold Flash
Max.Processing Temp:240°C for30-60seconds
(260°C for5seconds)

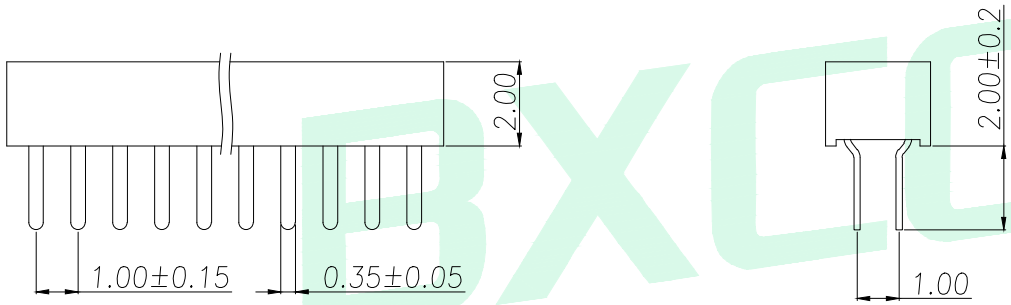

P/N	PIN	DIM.A	DIM.B
AM-PM1.0-V11-2*1P	1	0.00	1.00
AM-PM1.0-V11-2*2P	2	1.00	2.00
AM-PM1.0-V11-2*3P	3	2.00	3.00
AM-PM1.0-V11-2*4P	4	3.00	4.00
AM-PM1.0-V11-2*5P	5	4.00	5.00
AM-PM1.0-V11-2*6P	6	5.00	6.00
AM-PM1.0-V11-2*7P	7	6.00	7.00
AM-PM1.0-V11-2*8P	8	7.00	8.00
AM-PM1.0-V11-2*9P	9	8.00	9.00
.....	.....	.....	.....
AM-PM1.0-V11-2*40P	40	(PIN-1)	(PIN)



RECOMMEND P.C.B LAYOUT
PCB TOLERANCE:±0.05 (TOP VIEW)

GENERAL TOLERANCE	DONGGUAN BAOXUN PRECISION TECHNOLOGY CO., LTD		BXCONN®
DIM. TOL. x. ±0.30 x.x ±0.20 x.xx ±0.10 GENERAL ANGLE: x.° ±5° x.x° ±1° x.xx° ±0.5°	TITLE: 1.0FH H2.0 2xNPin 180度 W2.5 U型 PC2.0 6T		
	DWG. NO.: AM-PM1.0-V11-2*NP	CHECKED: MAX	
	PART NO.: AM-PM1.0-V11-2*NP	DRAWN: ELLA	
	UNIT: mm / SCALE: none / SHEET: 1of 1 / DWG. SIZE: A4 / LAYER: bxconn	APPROVED: WILL	

BXCONN®