






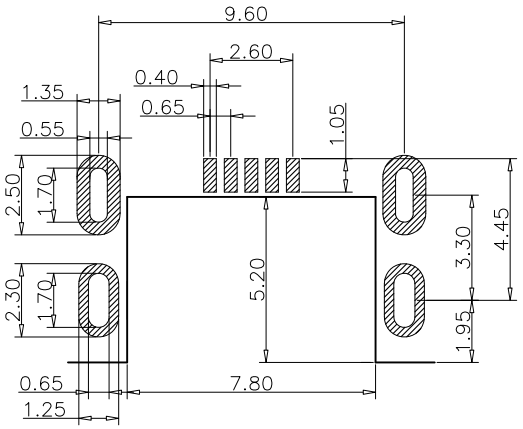





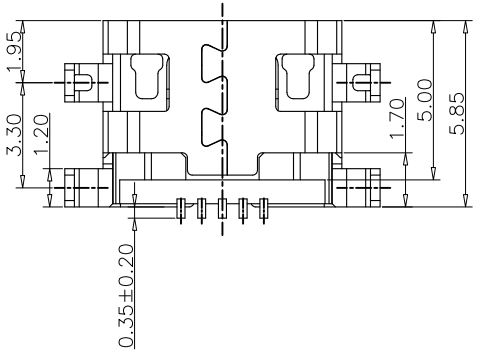

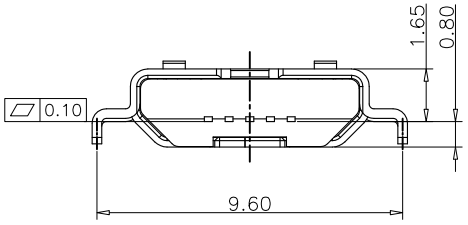

Specifications

A. Material
Plastic cement: LCP, Black
Contact: Copper Alloy, T=0.15mm
Shell: Stainless Steel, T=0.30mm

B. Plating
Contact Area: 1u" Au over 50u' min. Nickel
Solder Tails: 0.5u" Au over 50u' min. Nickel
Shell: 60u" min. Nickel

C. Electrical
Current Rating: 1.0A/contact terminal
Voltage Rating: 30V
Power Rating: 30W
Contact Resistance: 40mΩ max initial
50mΩ max after test
Dielectric Withstanding Voltage: 100V AC
Insulation Resistance: 100MΩ min.


D. Mechanical & Environmental
Operating Temperature: −25℃ to +85℃
Insertion force: 35.0 N Max
Withdrawal force: 8N Min
Durability: 3000 cycles

MICRO USB PIN ASSIGNMENTS


Pin Numbe	Signal Name
1	VBUS
2	D−
3	D+
4	ID
5	GND

Part Number			Product Description				
PMCFB-R22E-004			Micro USB Receptacle, Type B, Horizontal, 5 Pin, SMT, Mid-Bottom Mount, 0.8mm Offset				
DWG.No.	P-MCF-116		Tolerances Unspecified			Units: Metric(mm)	ROHS COMPLIANT 2011/65/EU Deca-BDEV
Revision	A0		X.X	±0.35	X° ±5°		
Designed	Lee	12/18/20	X.XX	±0.25	X.X° ±2°		
Approved	Allen	12/18/20	X.XXX	±0.15			


Connecting the Future
www.szywf.com.cn
www.szywf.cn




1 Rubber disc

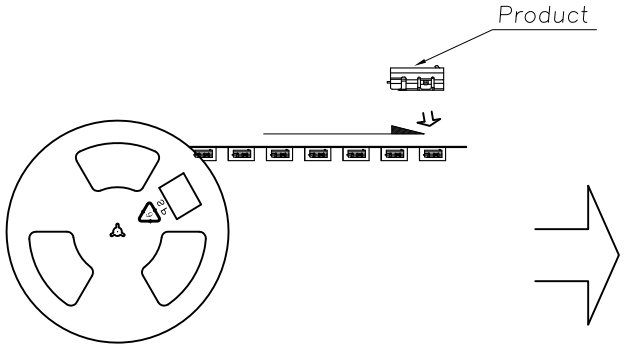


2 1000pcs/ disc

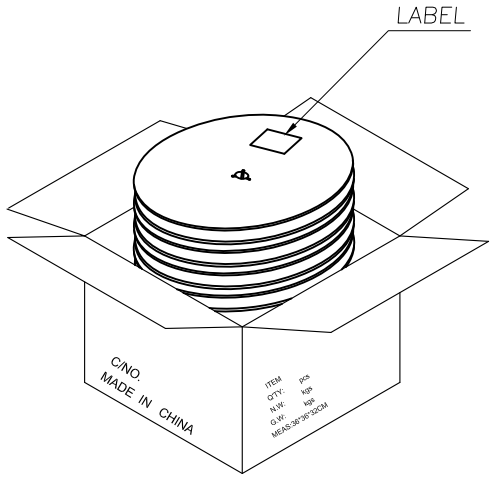


3 10 plates/box (10 Kpcs)

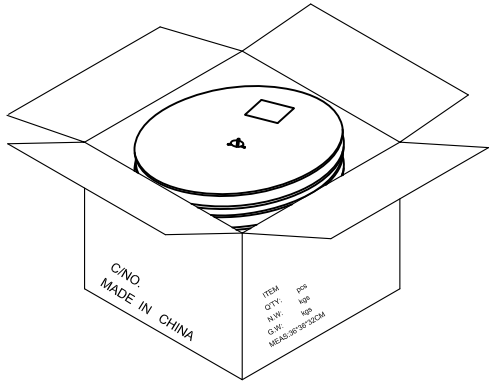

4 Each case contains 10 plates, if the last few cases are filled with fillers.



5 The outer box is sealed with transparent adhesive tape in the shape of "H".

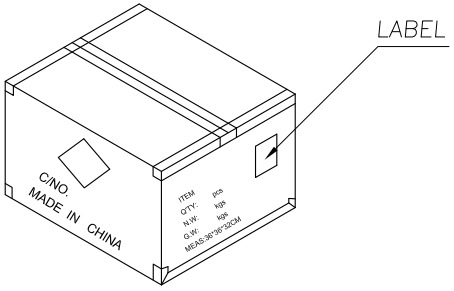

6 Paste the product or ROHS label as shown.

Part Number			Product Description				
PMCFB-R22E-004			Micro USB Receptacle, Type B, Horizontal, 5 Pin, SMT, Mid-Bottom Mount, 0.8mm Offset				
DWG.No.	P-MCF-116		Tolerances Unspecified			Units: Metric(mm)	ROHS COMPLIANT 2011/65/EU Deca-BDEv
Revision	A0		X.X	±0.35	X° ±5°		
Designed	Lee	12/18/20	X.XX	±0.25	X.X° ±2°		
Approved	Allen	12/18/20	X.XXX	±0.15			

Connecting the Future
www.szywf.com.cn
www.szywf.cn

Sheet No. 2/2