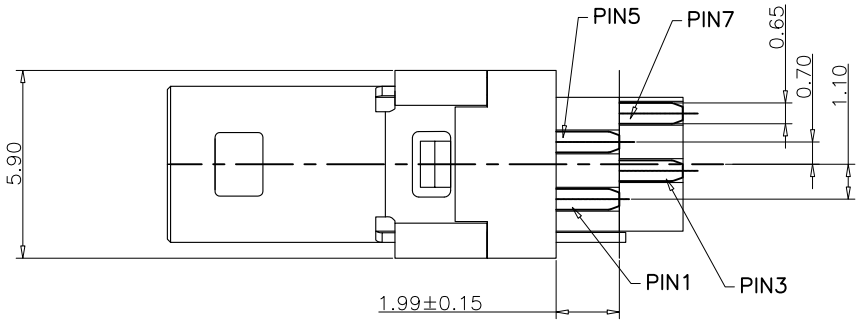

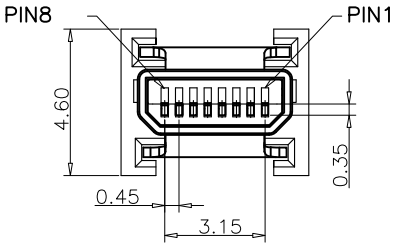

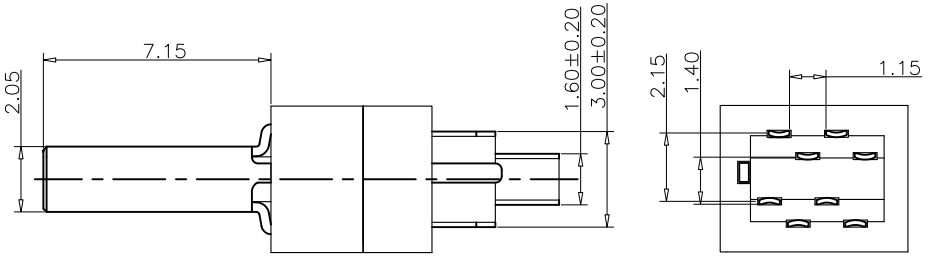

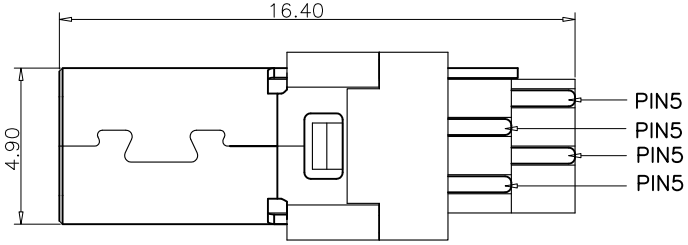

Specifications

A. Material
Plastic cement: LCP, Black
Contact: Copper Alloy, T=0.20mm
Shell: Copper Alloy, T=0.30mm

B. Plating
Contact Area: 1u" Au over 50u' min. Nickel
Solder Tails: 100u" min. Matte Tinover 50u' min. Nickel
Shell: 60u" min. Nickel

C. Electrical
Current Rating: 1.0A/contact terminal
Voltage Rating: 30V
Power Rating: 30W
Contact Resistance: 40mΩ max initial
50mΩ max after test
Dielectric Withstanding Voltage: 100V AC
Insulation Resistance: 100MΩ min.

D. Mechanical & Environmental
Operating Temperature: −25℃ to +85℃
Insertion force: 35.7 N Max
Withdrawal force: 7.0 N Min
Contact retention: 5.0N Min
Durability: 5000 cycles

PIN NUMBER	SIGNAL NAME
1	GND
2	TV
3	AUDIO
4	TV_DET
5	D+
6	GND
7	D−
8	VBUS

Part Number			Product Description				
PU8MW-R35B-006			Mini USB Plug, Wire Solder, 8 Pin				
DWG.No.	P-U8M-002		Tolerances Unspecified			Units: Metric(mm)	ROHS COMPLIANT 2011/65/EU Deca-BDEv
Revision	A0		X.X	±0.35	X° ±5°		
Designed	Lee	09/20/22	X.XX	±0.25	X.X° ±2°		
Approved	Allen	09/20/22	X.XXX	±0.15			

Connecting the Future
www.szywf.com.cn
www.szywf.cn
Sheet No. 1/2

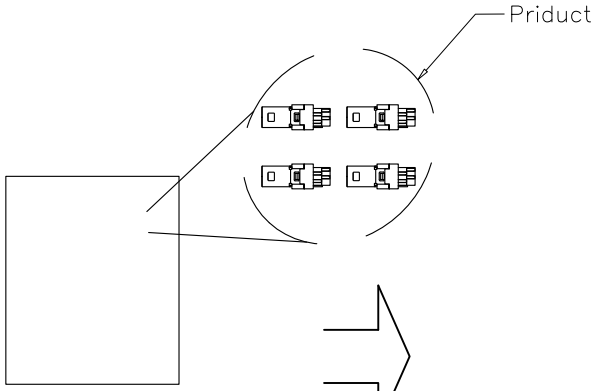

① PE bag



② 1000pcs/bag,and seal it with a sealing machine.

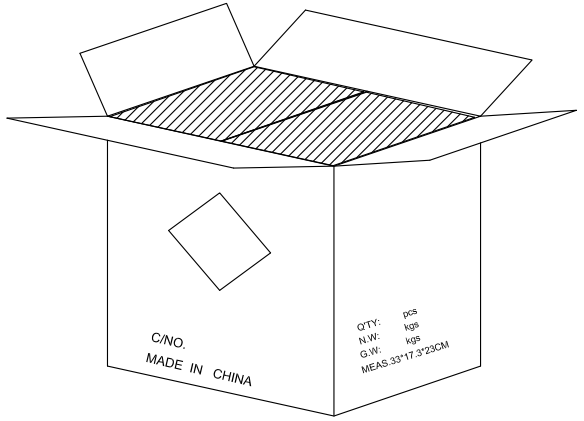

③ 25 bag/case (25K pcs).

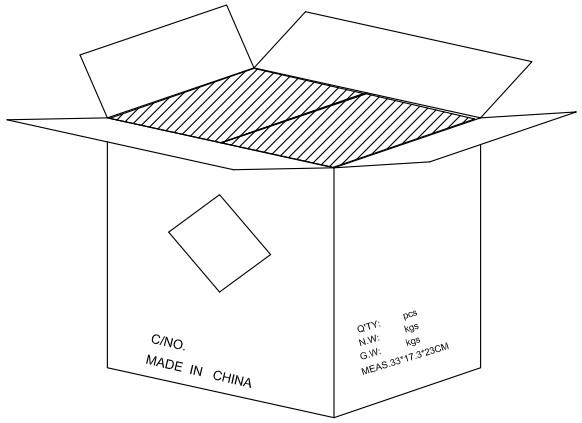

④ 25 bag per box, if the last box is added with filler in the space.

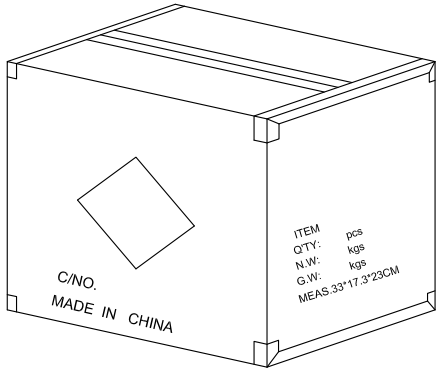

⑤ The outer box is sealed with transparent adhesive tape in the shape of "H".

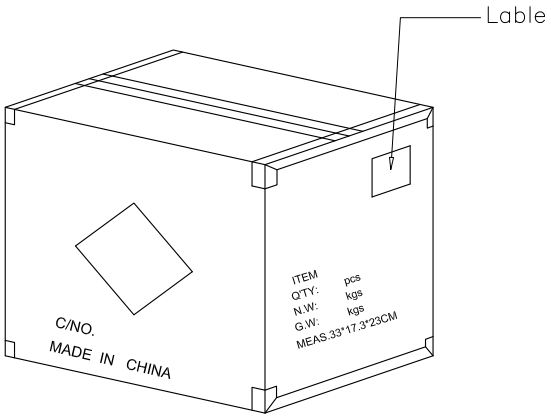

⑥ Paste the product or ROHS label as shown.

Part Number			Product Description				
PU8MW-R35B-006			Mini USB Plug, Wire Solder, 8 Pin				
DWG.No.	P-U8M-002		Tolerances Unspecified			Units: Metric(mm)	ROHS COMPLIANT 2011/65/EU Deca-BDEv
Revision	A0		X.X	±0.35	X° ±5°		
Designed	Lee	09/20/22	X.XX	±0.25	X.X° ±2°		
Approved	Allen	09/20/22	X.XXX	±0.15			

Connecting the Future
www.szywf.com.cn
www.szywf.cn
Sheet No. 2/2