




HSF Pb RoHS

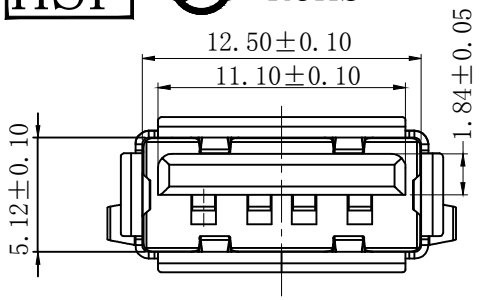



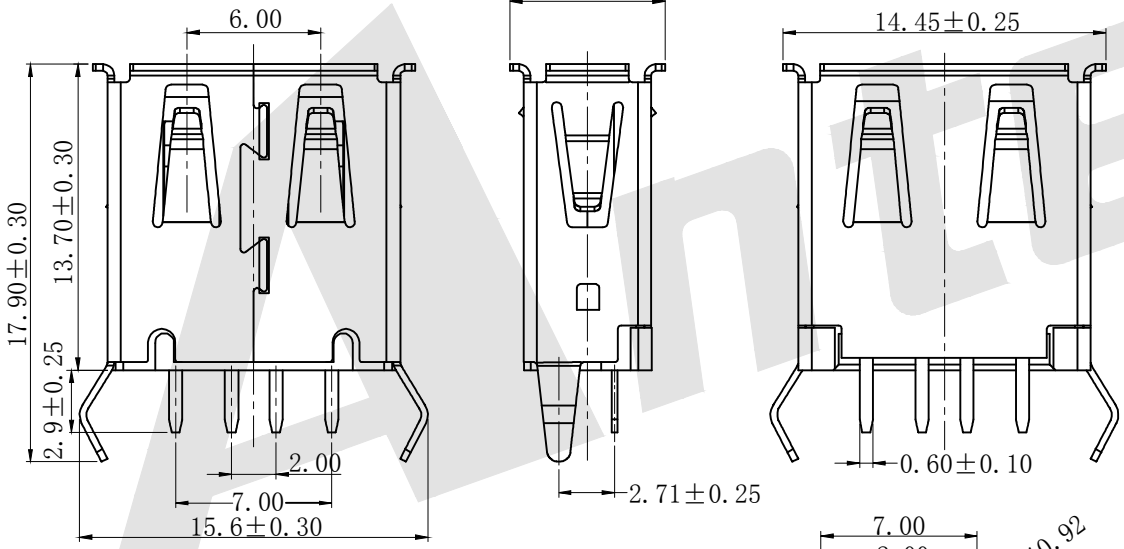

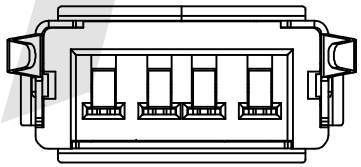

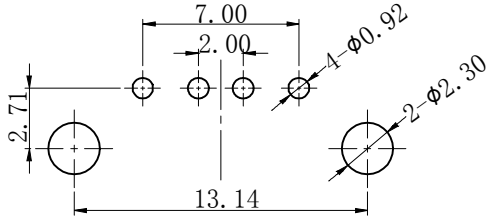

Recommended P.C.B Layout
(PCB BOARD TOLERANCE±0.05)

SPECIFICATIONS:

1. Electrical Characteristic:
   - 1.1 Current Rating: 1.5A Max
   - 1.2 Contact Resistance: 30milliohms MAX
   - 1.3 Dielectric Withstanding Voltage: 500V AC AT Sea Levol
   - 1.4 Insulation Resistance:1000 Megohms MIN
2. Material:
   - 2.1 Housing:Temperature Thermoplastics,LCP UL94V-0
   - 2.2 Contact:Copper ALLOY,T=0.25mm,Piated Gold in Mating Area,Tin On Solder Talls
   - 2.3 Shell:IronT=0.30mm,Nickel/Plating
3. Mechanical Characteristic:
   - 3.1 Insertion Force:3.57Kgf Max.
   - 3.2 Extraction Force:1.02Kgf Min.

Antenk

REV	DESCRIPTION	DATE

Unless Otherwise specified tolerance
X. ±0.35 X.XX:±0.20
X.X:±0.25 X.XXX:±0.15

SCALE: As Shown	UNIT: mm
DRAW Lv Xun Hua	DATE 2019/06/20
CHECK BobYang	DATE 2019/06/20

3rd ANGLE PROJECTION

ANTENK ELECTRONICS CO,.LTD
Http://www.antenk.com
E-mail:sales@antenk.com

TITLE: USB A Type Receptacle Straight Dip Short Body,Full shield L=13.7mm

DRAWING NO: 1.01.02700039

PRODUCT NO: 1.01.02700039