
领晨科技
LEADING-TECH

LTM540W

General Purpose Silicon Rectifier







Features

- The plastic package carries Underwiters Laboratory Flammability Classification 94V-0
- Contruction utilizes vold-free molded plastic technique
- Low reverse leakage current
- High forward surge current capability
- High temperature soldering guaranteed:260℃/10 seconds at terminals
- Lead free in comply with EU RoHS 2011/65/EU directives

Mechanical Data

- Case:SMAW
- Terminal:Leads solderable per MIL-STD-750 Method 2026
- Polarity:Color band denotes cathode end
- Mounting Position:Any

Ordering Information

Part Number	Marking	Shipping	Reel
LTM540W	540W	8000PCS Tape&Reel	13 inchs

Maximum Ratings and Electrical Characteristics

Ratings at 25℃ ambient temperature unless otherwise specified.
Single phase half-wave 60Hz,resistive or inductive load,for capacitive load current derate by 20%.

Rating	Symbol	LTM540W	Unit
Maximum repetitive peak reverse voltage	V_{RRM}	4000	V
Maximum RMS voltage	V_{RMS}	2800	V
Maximum DC blocking voltage	V_{DC}	4000	V
Maximum average forward rectified current 0.2”(5mm) lead length at T_A=50℃	$I_{(AV)}$	1	A
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	I_{FSM}	30	A
Maximum instantaneous forward voltage at 1.0 A	V_F	2.1	V
Maximum DC reverse current T_A=25℃ at rated DC blocking voltage T_A=100℃	I_R	5 150	μA
Typical junction capacitance (Note1)	C_J	8	pF
Typical thermal resistance (Note2)	$R_{\theta JA}$	93	°C/W
Operating junction and storage temperature range	T_J,T_{STG}	-50 to +150	°C

Note:(1) Measured at 1MHz and applied reverse voltage of 4.0V D.C.
(2) P.C.B. mounted with 0.2" × 0.2" (5 mm × 5 mm) copper pad areas.

Characteristics Curve

FIG.1 FORWARD CURRENT DERATING CURVE

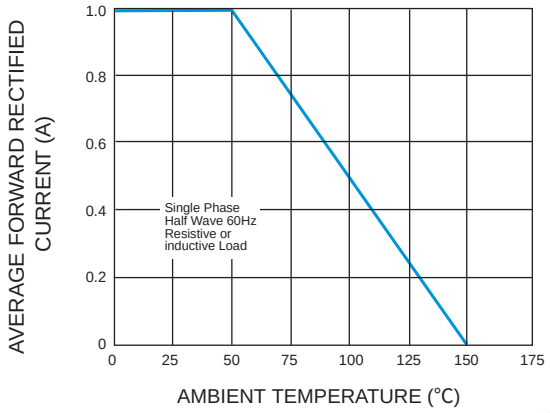


FIG.2 MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

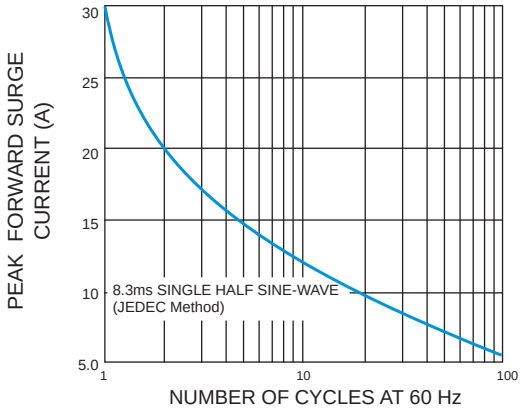


FIG.3 TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

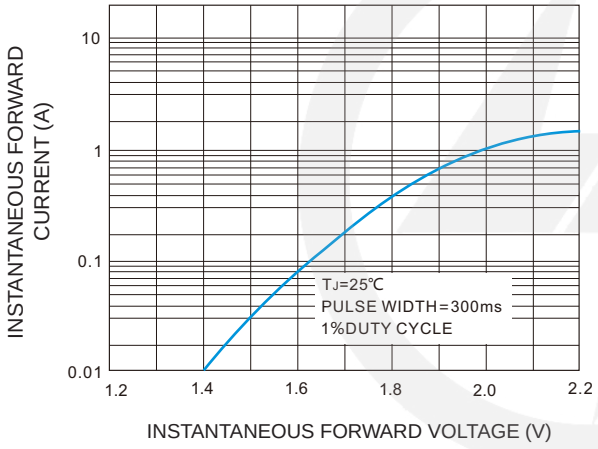


FIG.4 TYPICAL REVERSE CHARACTERISTICS


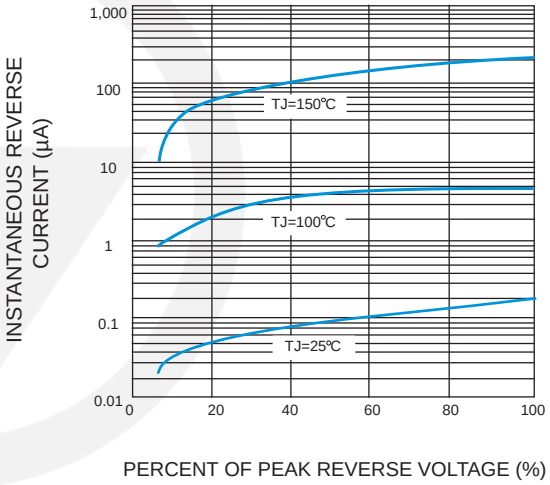



FIG.5 TYPICAL JUNCTION CAPACITANCE

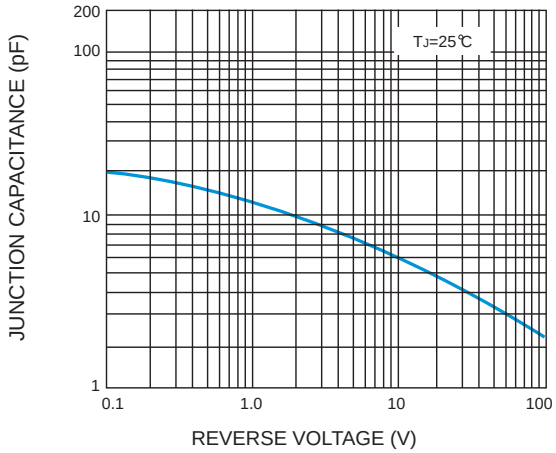


Package Outline

SMAW

Unit：mm

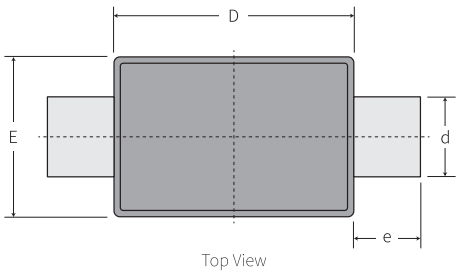

Top View

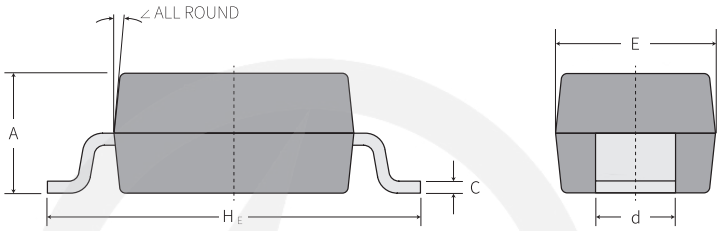


Front view　　Side view

UNIT		A	C	D	E	H_E	d	e	∠
mm	max	2.00	0.28	3.80	2.60	5.80	1.40	1.20	6°
	min	1.60	0.10	3.40	2.20	5.40	1.00	0.80	

Suggested Pad Layout

SMAW

Unit：mm

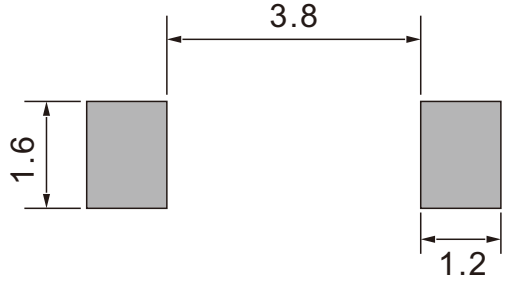


Note:

1. Controlling dimension:in millimeters.
2. General tolerance:±0.05mm
3. The pad layout is for reference purpose only.

Carrier Tape Dimensions

Unit：mm

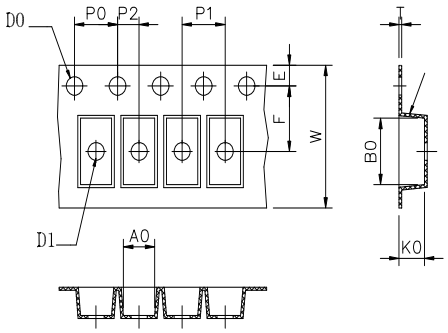


Symbol	Spec	Symbol	Spec
W	12.00±0.10	P1	4.00±0.10
E	1.75±0.10	P2	2.00±0.05
F	5.50±0.05	T	0.25±0.02
D0	1.55±0.05	A0	2.60±0.10
D1	1.50±0.10	B0	5.70±0.10
P0	4.00±0.10	K0	2.00±0.05

Reel Dimensions


Unit：mm

13” Reel

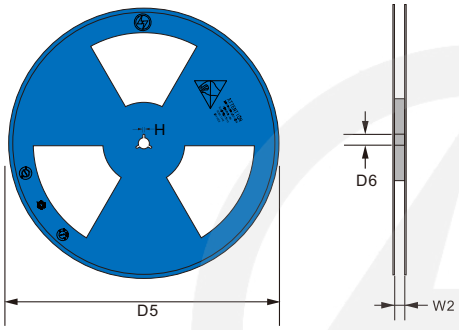

D5	Φ330.0±2.0
D6	Φ13.5±0.5
H	2.5±1.0
W2	12±2.0
Quantity: 8000PCS	


Packaging

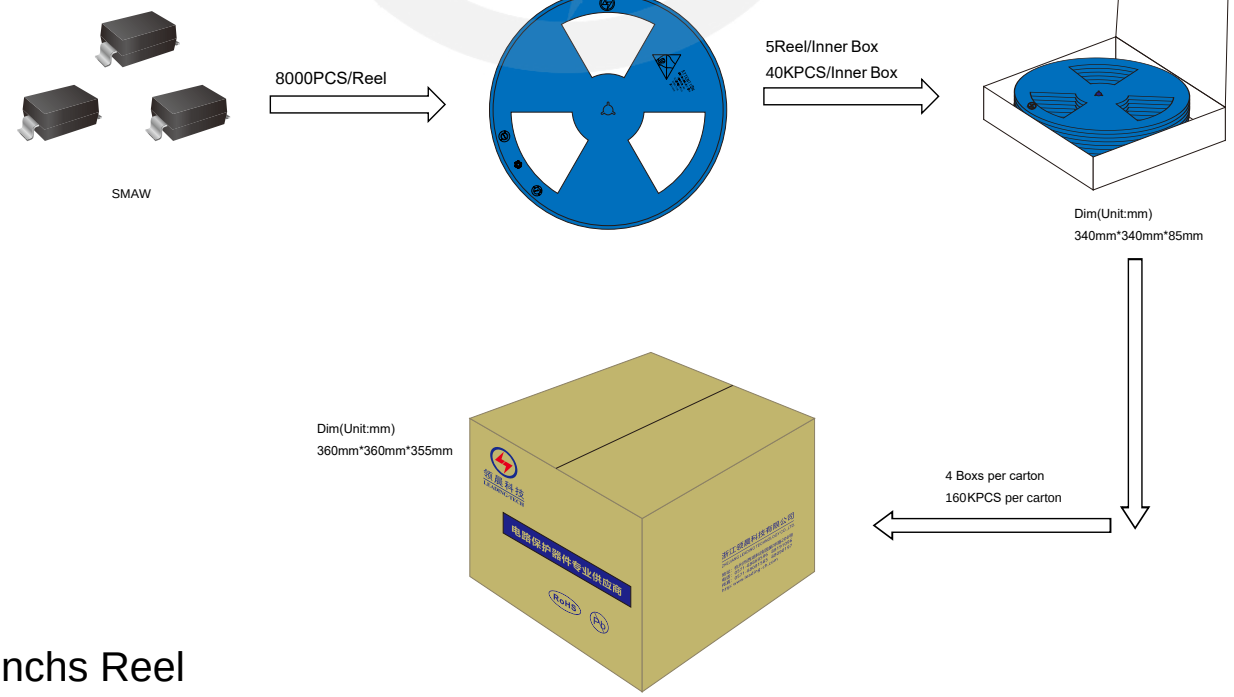

13 inchs Reel

Recommended Soldering Conditons

Reflow Soldering

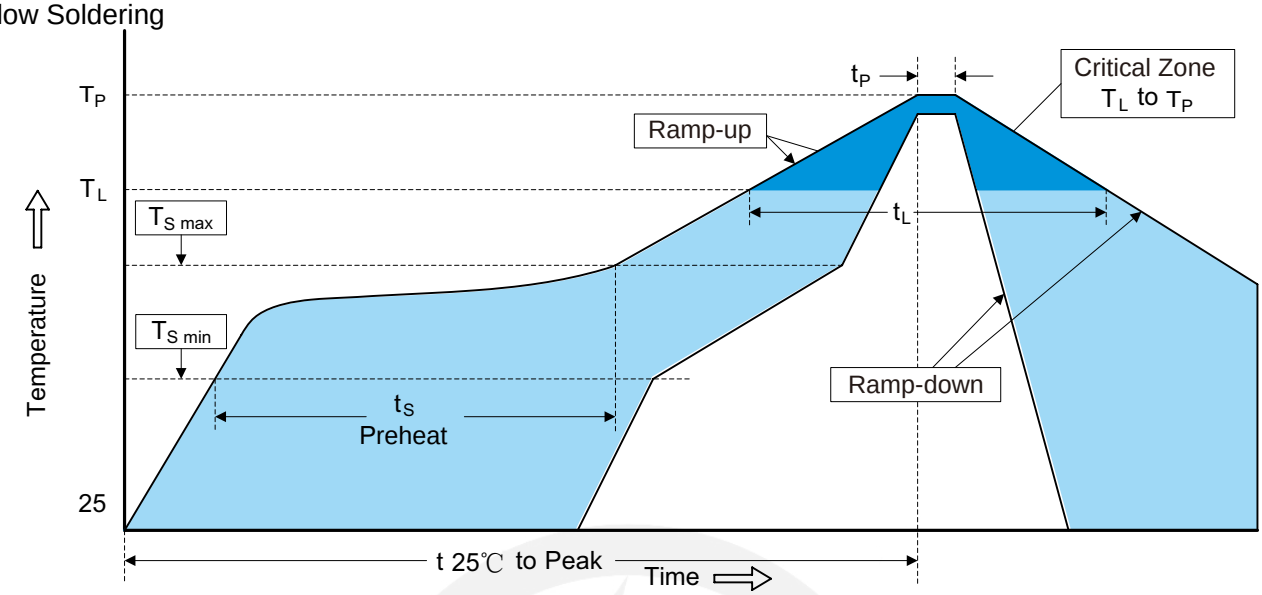

Recommended Conditions

Profile Feature	Pb-Free Assembly
Average ramp-up rate (T_L to T_P)	3℃/second max.
Preheat -Temperature Min ($T_{S\ min}$) -Temperature Max ($T_{S\ max}$) -Time (min to max) (t_S)	 150℃ 200℃ 60-180 seconds
$T_{S\ max}$ to T_L -Ramp-up Rate	 3℃/second max.
Time maintained above: -Temperature (T_L) -Time (t_L)	 217℃ 60-150 seconds
Peak Temperature (T_P)	260℃
Time within 5℃ of actual Peak Temperature (t_P)	20-40 seconds
Ramp-down Rate	6℃/second max.
Time 25℃ to Peak Temperature	8 minutes max.

Important Notice and Disclaimer

Leading-Tech reverses the right to make changes to this document and its products and specifications at any time without notice.

Customers should obtain and confirm the latest product information and specifications before final design,purchase or use.

Leading-Tech makes no warranty,representation or guarantee regarding the suitability of its products for any particular purpose,not does Leading-Tech assume any liability for application assistance or customer product design.

Leading-tech does not warrant or accept any liability with products which are purchase or used for any unintended or unauthorized application.

No license is granted by implication or otherwise under any intellectual property rights of Leading-Tech.

Leading-Tech products are not authorized for use as critical components in life support devices or systems without express written approval of Leading-tech.

Version Update Information

Series NO.	Enactment/Revision Date	Effective Date	Version	Revision content	Revision Reason	Revision Person	Note
01	2023.11.22	2023.11.23	1.0	New File	/	Jiang	
02	2025.06.21	2025.06.21	1.1	Update packaging information	/	Ding	