Jieying Communication Technology (Shenzhen) Co., Ltd.
http://www.jytxjs.cn

High Pass Filter

JY-HFCN-8400+



Generic photo used for illustration purposes only

50Ω 9000 to 13000 MHz


Features

- Low cost
- Small size
- 5 sections
- Temperature stable
- Excellent power handling
- LTCC construction with great moisture resistance, corrosion resistance, and high reliability

Applications

- Sub-harmonic rejection
- Transmitters / receivers
- base station of mobile communication and lab use

electrical schematic



Electrical Specifications [1] (T_{AMB}= 25° C)

STOP BAND (MHz) (Loss>30dB) Typ.	STOP BAND (MHz) (Loss>20dB) Min.	FCO,(MHz) Nom. (Loss 3dB) Typ.	PASS BAND (MHz) (Loss<2.5dB) Max.	PASS BAND (MHz) (Loss<3dB) Max.	VSWR (:1) Stopband Frequency (MHz) Typ.	VSWR (:1) Stopband Frequency (MHz) 1.5:1	POWER INPUT (W) Max	NO. OF SECTIONS
5700	6000	8400	9500-13000	9000-13000	20:1	9000-13000	7	5

1. In Application where DC voltage is present at either input or output ports, coupling capacitors are required.

Pin Connections

RF IN	1
RF OUT	3
GROUND	2,4,5,6


Maximum Ratings


Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C
RF Power Input	7W at 25ºC

*Passband rating, derate linearly to 3W at 100°C ambient.
Permanent damage may occur if any of these limits are exceeded.


Typical Performance Data at 25° C

Frequency (MHz)	Insertion Loss (dB)	VSWR (:1)
50	61.91	1737.18
1000	38.60	1500.37
1960	35.58	157.93
3250	40.06	64.94
4170	39.69	32.79
5020	26.83	27.16
5680	22.27	25.72
6470	20.04	21.40
8050	3.03	1.47
9500	1.92	1.46
10480	1.17	1.34
11610	1.73	1.40
12530	1.95	1.52
13440	1.65	2.03
15000	2.11	2.31

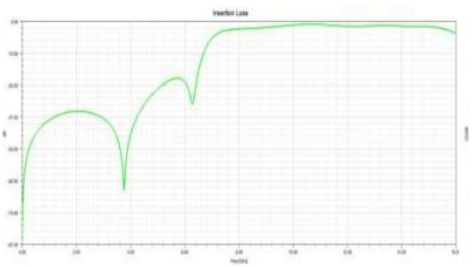


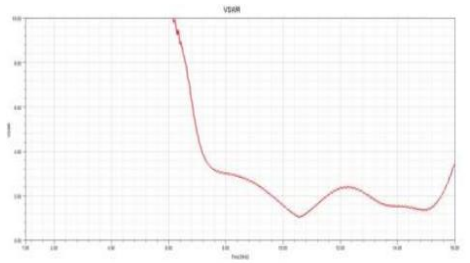

Suggested PCB Layout

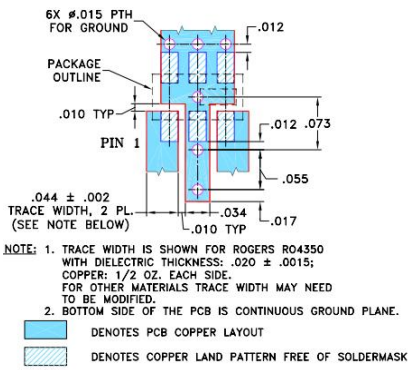

Outline Drawing

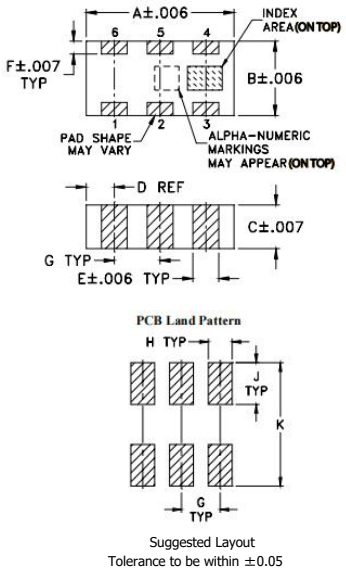

Suggested Layout
Tolerance to be within ±0.05

Outline Dimensions：Unit (mm)

A	3.20	B	1.60	C	0.89
D	0.61	E	0.56	F	0.28
G	0.99	H	0.61	J	1.07
K	3.12	wt	0.020g		

JY-HFCN-8400+

Tel : +86 0755-27881106
Fax : +86 0755-27597069
Add : 806 Building B7, Tianrui Industrial Park, Fuyong Street, Baoan District, Shenzhen