


REV.	ECN NO.	DESCRIPTION	DRAW	DATE



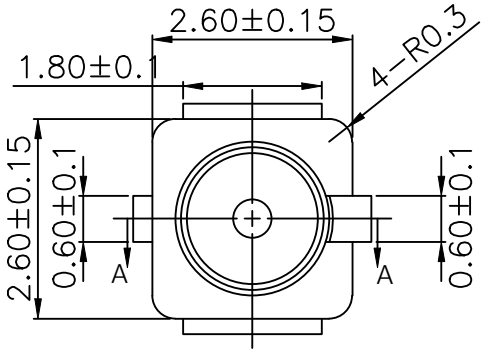





SPECIFICATION:
1.Current Rating:0.5A Max
2.IMPEDANCE;500HMNOMINAL;
3.OPERATING TEMPERATURE:−40℃~+90℃;
4.VSWR:DC−3GHZ≤1.30，3GHZ−6GHZ≤1.30;
5.DURABILITY:30CYCLES;
6.SOLDCRING HCAT RCSISTANCC:260℃ FOR 5±1SCC;


MATERIAL:
1.HOUSING (MOLDING):LCP UL94 V−0 WHITE;
2. CONTACT PIN:BRASS(C2680−H)T=0.15±0.01MM ;
3.SHELL:PHOSPHORBRONZE(C5191−H)T=0.15±0.01MM;


PLATING
1.SHELL: GOLD PLATED 1.5U",50U"MIN NICKLE, UNDERPLATED OVER ALL
2.CONTACT : GOLD PLATED 3U", 50U" MIN NICKLE, UNDERPLATED OVER ALL



A-A

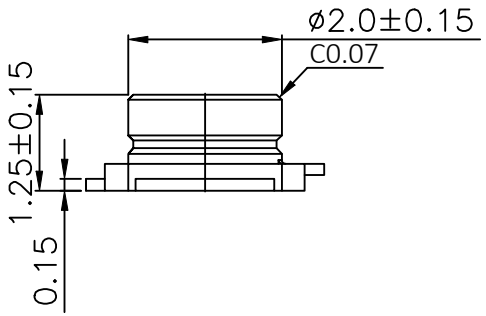



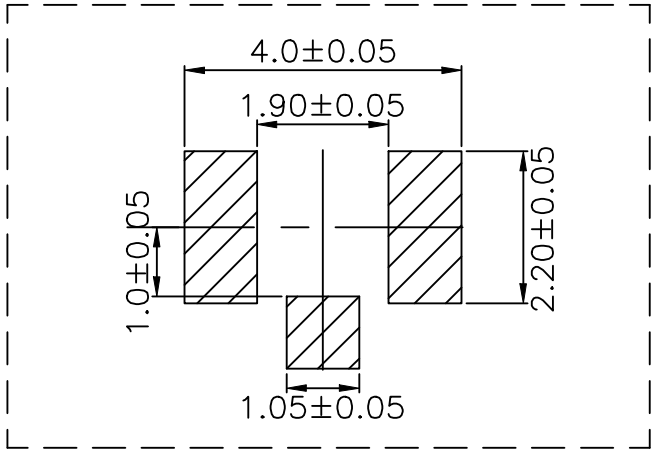

建议PBC尺寸

No.	描述 Description	材质 Material	外观处理 Finish	数量 Qty/Unit
3	Insulator	LPC	Wtite	1PCS
2	Center Contact	Brass	Gold	1PCS
1	Contact Shell	Phosphor Bronze	Gold	1PCS

COSTOMER DRAWING	深圳市莱联电子有限公司 SHENZHEN LAILIAN ELECTRONICS CO.,LTD			
DRAWING				
CHECK				
APPROVAL				
TOLERANCES ARE				
30-150 ±0.35 / 10-30 ±0.2 / 5-10 ±0.15 / 0-5 ±0.1	ANGLE ±3°	TITLE	IPEX端子插座（第一代）	REV. A
		PART NO.	LAIL-IPEX1-C2.0H1.25-02	UNITS mm
		DWG.NO.		Projection