


由 Autodesk 教育版产品制作

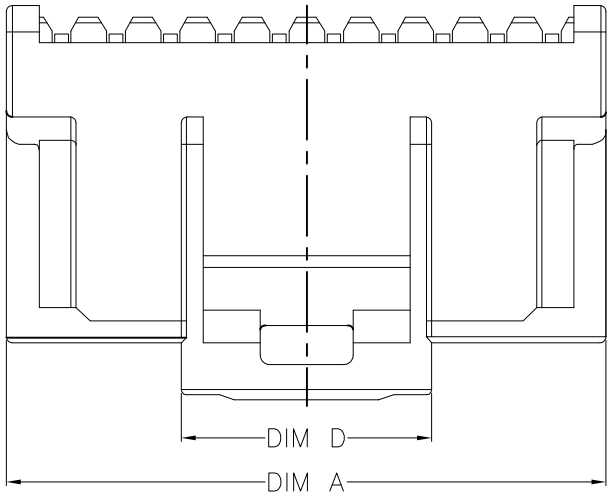

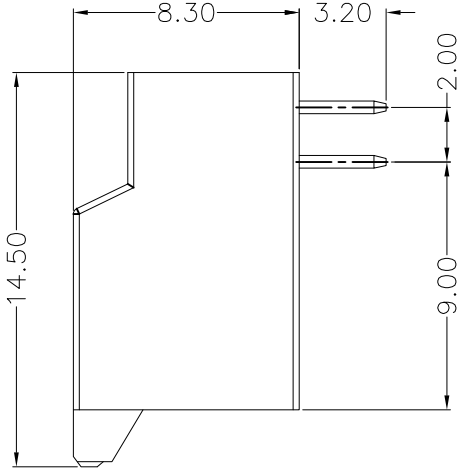

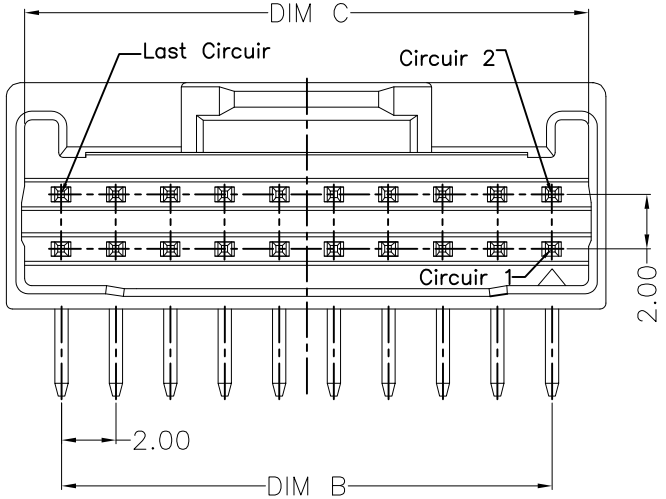


H200014-XX-XX

SERIES NO:

PIN Q'PY:
10~40

PLATING:
0T-Tin-plated
G0-G/F 0.8U"

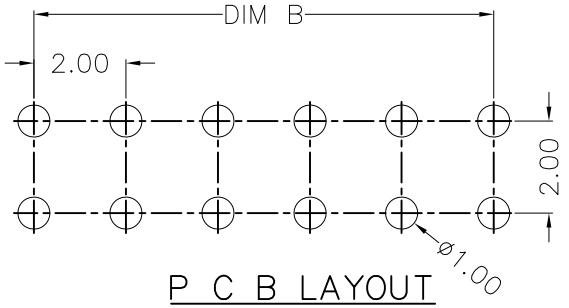

P C B LAYOUT

Features:
1. 10~40 circuits available;
2. Material:PA66 UL94V-0;
3. Contact:Brass;
4. Finished:Tin-plated;
5. Mates with H200012-XX housing;

Specification:
Current rating:1A AC/DC
Voltage rating:100V AC/DC
Contact resistance:10mΩ Max.
Insulation resistance:1000MΩ Min.
Withstanding voltage:800VAC/minute.
Ambient temperature range:-40°C~85°C.

Dimensional Information(mm)

Circuits	DIM A	DIM B	DIM C	DIM D
10	12.00	8.00	10.70	7.30
12	14.00	10.00	12.70	9.20
14	16.00	12.00	14.70	9.20
16	18.00	14.00	16.70	9.20
18	20.00	16.00	18.70	9.20
20	22.00	18.00	20.70	9.20
22	24.00	20.00	22.70	9.20
24	26.00	22.00	24.70	9.20
26	28.00	24.00	26.70	9.20
28	30.00	26.00	28.70	9.20
30	32.00	28.00	30.70	9.20
32	34.00	30.00	32.70	9.20
34	36.00	32.00	34.70	9.20
36	38.00	34.00	36.70	9.20
38	40.00	36.00	38.70	9.20
40	42.00	38.00	40.70	9.20

REV	Description	DATE	GENERAL TOLERANCES (unless specified)	UNITS	MM	DATE	2010-03-05	连兴旺电子(深圳)有限公司 LXWCONN ELECTRONICS(SHENZHEN)CO.,LTD	
A	新版发行	2010-06-05	X.X±0.4	SCALE	1:1	DRAWING	Liu zhi guo		
			X.XX±0.25	REV	A	CHECKED BY	Li peng	PRODUCT NAME	2.0 mm right angle header
			X.XXX±0.15			APPROVAL BY	OYSW	RART NUMBER	H200014-XX-XX

由 Autodesk 教育版产品制作