



This document is the property of Xinshengyue Corporation and is delivered on the express condition that it is not to be disclosed, reproduced or used, in whole or in part, for manufacture or sale by anyone other than Xinshengyue Corporation without its prior concert&that no right is granted to disclose or to use any information in this document.

REV.	ECN NO.	DESCRIPTION	DATE	DESIGN
A	ECN NO.	NEW DRAWING	2026.04.28	Janus

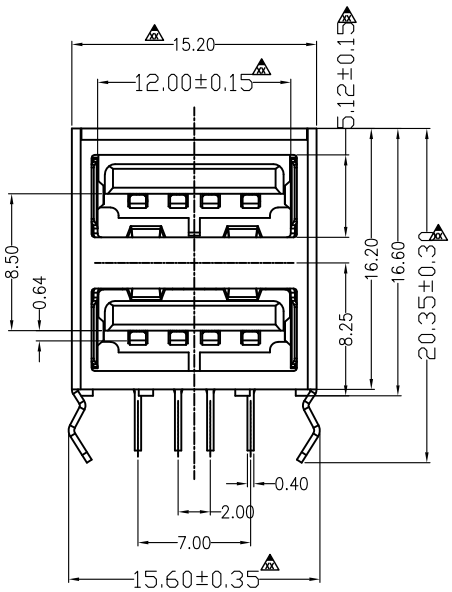


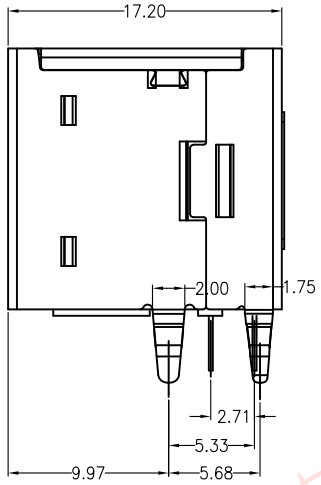

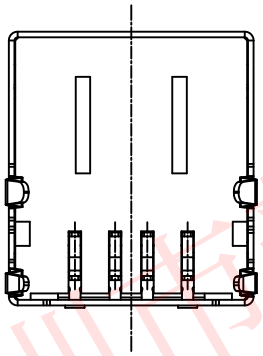

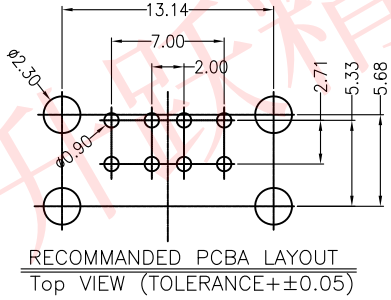

RECOMMANDED PCBA LAYOUT
Top VIEW (TOLERANCE+±0.05)

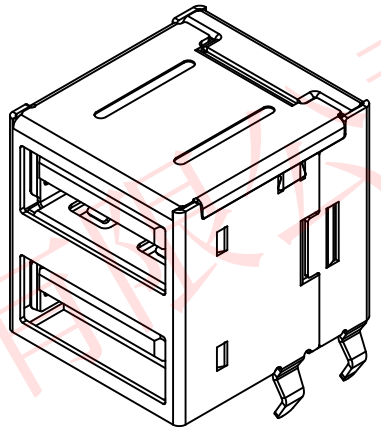

備注:
1.材质:
見附表
2.电气性能:
2.1 接触电阻:30mΩ MAXIMUM
2.2 额定电流:1.5A
2.3 耐电压:500 V R.M.S.
2.4 绝缘: 1000 MΩ MIN
2.5 工作温度:-40°C ～ 85°C
3 机械性能:
3.1 插入力:3.57kg MAX
3.2 拔出力:1.02kg MIN
3.3 寿命:1500 CYCLES
4.带"⚠"为首件检验尺寸
带"⚠"为首件及制程巡检尺寸

P/N: 103039-120101

1:DIP
PACKAGING:2.TRAY
SERIES NUMBER:01~99
CONTACT AREA PLATED
1: Au G/F
SOLDER AREA PLATED
0: SN

序号	料号	品名	材质	用量	备注
04		塑胶主体	PBT	1	黑色，UL94 V-0
03		外壳	SPCC，T=0.30	1	镀镍
01		端子	C2680，T=0.25	1set	功能接触区镀金，焊脚镀雾锡

TOLERANCE		NAME(INTENDED USE) CUSTOMER DRAWING	XSUA® 深圳市新升跃精密电子有限公司 SHENZHEN XINSHENGYUE PRECISION ELECTRONICS CO., LTD
X.X ±0.38	X.° ±10°	PART NO.	TITLE: USB 2.0 A 母座 双层 成品（直脚）
.XX ±0.25	.X° ± 8°		
.XXX ±0.02	.XX° ± 5°	DESIGN: Arvin	DRAWG NO. C-103039
UNITS	mm		SCALE 1:1 / SHEET 1/1 / REV. A
MATERILA		CHED:	
FINISH		APPD:	

深圳市新升跃精密电子有限公司