HSF RoHS c UL us CE

REVISION RECORD				
REV	ECN	DESCRIPTION	DRFT	DATE
A0		NEW		22.01.17
A1		修正视图标注	W.C	25.04.07

NOTES1:

UL Standard

1.Rated voltage/current : 300V / 15A
2.Withstanding voltage : AC2000V/1Min.
3.Torque value : M2.5 , 3.5Lb.in
4.Wire range : 28~12AWG

IEC Standard

1.

Pollution degree	2
Overvoltage category	III
Rate impulse voltage(KV)	4KV
Rate voltage(V)	320V
Rate current(A)	20A


2.Torque value : M2.5 , 0.5N·m
3.Wire range : 0.2~2.5mm²


NOTES2:


1.Dimension shall be interpreted per ASME Y14.5-2009
2.Pitch : 5.08mm, Poles : N=02~24P
3.Stripping length : 7~8mm
4.Operating temperature: -40℃~+105℃
5.Undimensioned tolerances:


Pitch range in mm			Nominal dimension range in mm					— ⌒ ▱
TO 6	Over 6 TO 10	Over 10 TO 24	TO 30	Over 30 TO 60	Over 60 TO 100	Over 100 TO 150	Over 150	0.1/10
								∠
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30	±2°


6.RoHS Compliance

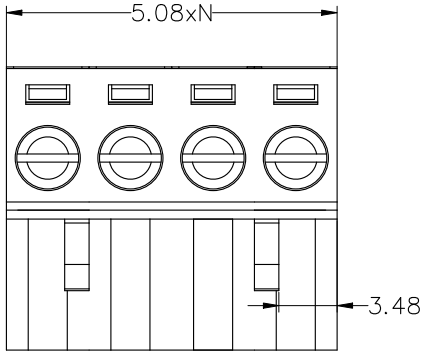

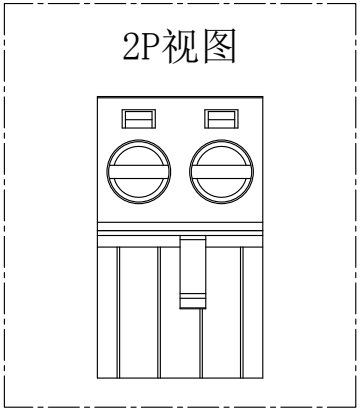



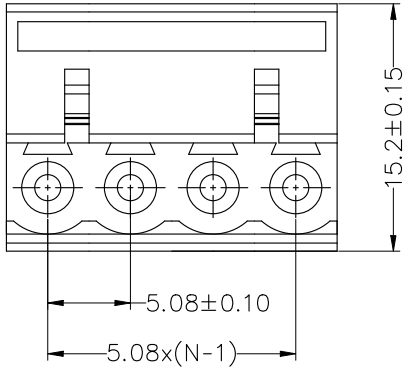



Ordering Information

JL 2EDGK - 508 XX X XX

- 508: Pitch, 508=5.08PH
- XX: No.of pins, 2~24
- X: Housing Color, B=Black, G=Green, U=Blue, R=Red, W=White, Y=Yellow, O=Orange, E=Grey
- XX: Serial code

ITEM	NAME OF PART	MATERIAL	NOTES
4	Clamp	Copper alloy	Ni plated
3	Cage	Copper alloy	M2.5/Ni plated
2	Screw	SWRCH	M2.5/Zn plated
1	Housing	PA66	UL94V-0

DRAW	SP.ZHENG	SCALE	FIT
		UNIT	mm
CHECK	W.CHEN	SIZE	A4
		SHEET	1/1
APPROVE	J.CHEN	PROJ.	

JiLN® 东莞市锦凌电子有限公司 DONGGUAN JINLING ELECTRONICS CO.,LTD

PART NO.	JL2EDGK-508XXXXX
TITLE:	JL2EDGK-5.08-XXP插拔式母座/铜方块