HSF RoHS cULus CE

REVISION RECORD				
REV	ECN	DESCRIPTION	DRFT	DATE
A0		NEW	Z.S.P	22.4.1

NOTES1:

UL Standard

1.Rated voltage/current : 300V / 8A
2.Withstanding voltage : AC1500V/1Min.
3.Torque value : M2 , 1.77Lb.in
4.Wire range : 28~16AWG

IEC Standard

1.

Pollution degree	2
Overvoltage category	Ⅲ
Rate impulse voltage(KV)	2.5KV
Rate voltage(V)	250V
Rate current(A)	7A

2.Torque value : M2 , 0.2N·m
3.Wire range : 0.5~1.5mm²

NOTES2:

1.Dimension shall be interpreted per ASME Y14.5-2009
2.Pitch : 3.5mm, Poles : N=02~22P
3.Stripping length : 6~7mm
4.Operating temperature: -40℃~+105℃
5.Undimensioned tolerances:

Pitch range in mm			Nominal dimension range in mm					— ⌒ ▱
TO 6	Over 6 TO 10	Over 10 TO 24	TO 30	Over 30 TO 60	Over 60 TO 100	Over 100 TO 150	Over 150	0.1/10
								∠
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30	±2°

6.RoHS Compliance

Ordering Information

JL15EDGKB - 350 XX X XX

- Pitch: 350=3.5PH
- No.of pins: 02~24P
- Housing Color: B=Black, G=Green, U=Blue, R=Red, W=White, Y=Yellow, O=Orange, E=Grey
- Stream code: 01~99

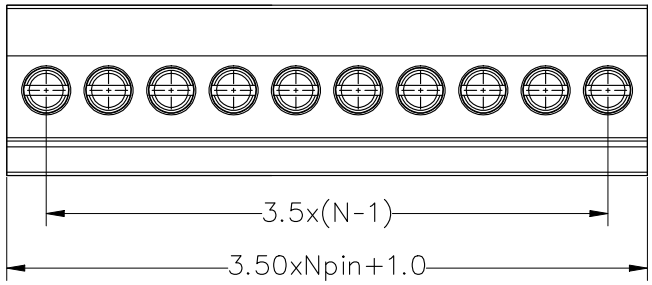

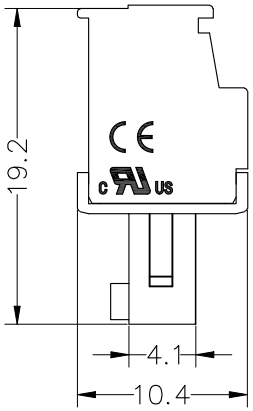

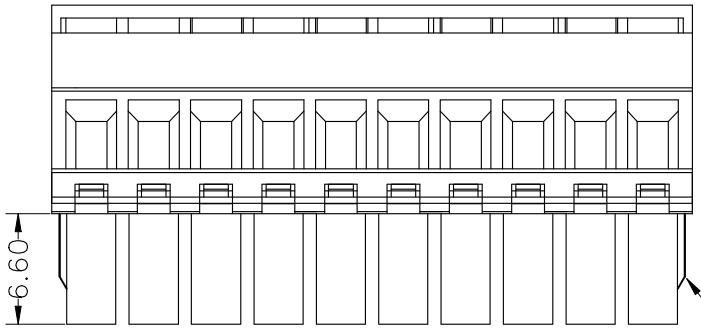



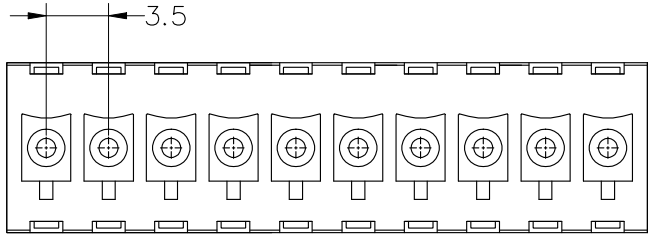

DRAW	SHUANGPING ZHENG	SCALE	FIT
		UNIT	mm
CHECK	LICHAO LIU	SIZE	A4
		SHEET	1/1
APPROVE	YONGLIANG GAO	PROJ.	

JILN® 东莞市锦凌电子有限公司 DONGGUAN JINLING ELECTRONIC CO., LTD

PART NO.	JL15EDGKB-350XXXXX
TITLE:	JL15EDGKB-3.5-XXP插拔式母座