





2 Pin



3D 图示（参考）

Specifications:
规格：
Voltage rating:250V AC/DC
额定电压：250V AC/DC
Current rating:3A AC/DC
额定电流：3A AC/DC
Withstanding voltage:800V AC/minute
耐受电压：800V AC/分钟
Temperature range:-40℃-+85℃
温度范围：-40℃-+85℃
Insulation resistance:1000MΩ min
绝缘电阻：1000MΩ Min
Contact resistance:20mΩ Max
接触电阻：20mΩ Max

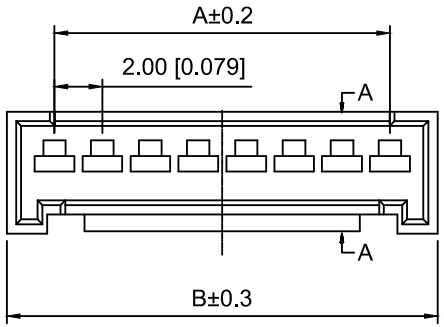







A-A

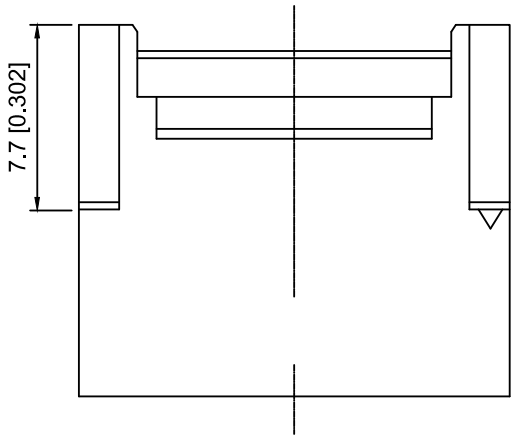


X2011 H F - 05 A - N0
① ② ③ ④ ⑤ ⑥

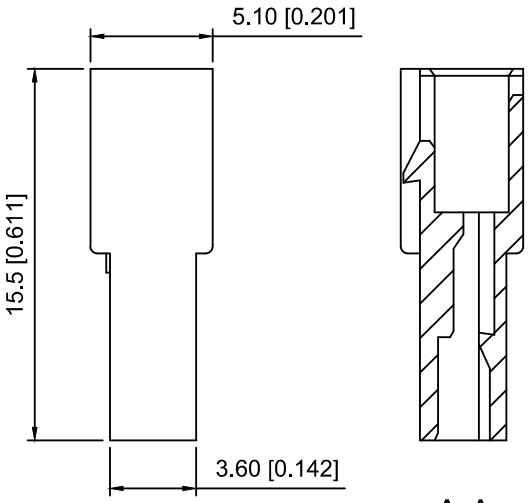1.Series No
2.Category:H-HSG
3.Category:F-Female Housing
4.Row No.Pin No:XX-02~15 Pin
5.Special No:A-With Lock
6.Material:N0-PA66 UL94V-0

| Poles | Dimensions(mm) | | Poles | Dimensions(mm) | |
|---|---|---|---|---|---|
| | A | B | | A | B |
| 02 | 2.00 | 5.98 | 09 | 16.00 | 19.98 |
| 03 | 4.00 | 7.98 | 10 | 18.00 | 21.98 |
| 04 | 6.00 | 9.98 | 11 | 20.00 | 23.98 |
| 05 | 8.00 | 11.98 | 12 | 22.00 | 25.98 |
| 06 | 10.00 | 13.98 | 13 | 24.00 | 27.98 |
| 07 | 12.00 | 15.98 | 14 | 26.00 | 29.98 |
| 08 | 14.00 | 17.98 | 15 | 28.00 | 31.98 |

| X2011HF-05A-N0 | PA66 | X2011W | X2011TM |
|---|---|---|---|
| PART N0 | Material | Suitable XKB Wafer | Suitable XKB Terminal |
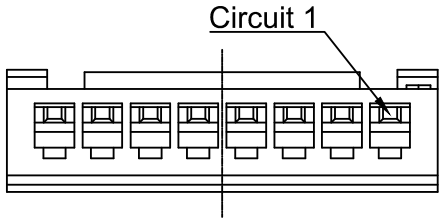
| | | | | | | |
|---|---|---|---|---|---|---|
| | | | | | ANGLAR | ±5° |
| ΔX | | | | | L≤ 4 | ±0.2 |
| ΔX | | | | | 4<L≤ 16 | ±0.3 |
| ΔX | | | | | 16<L≤ 63 | ±0.4 |
| MARK | DESCRIPTION | DATE | REVISED | APPROVED | L> 63 | ±0.5 |
| REVISIONS | | | | | UNSPECIFIED TOLERANCES | |

www.helloxkb.com www.helloxkb.cn www.xk-dg.cn

XKB

| | | | |
|---|---|---|---|
| DSND | | SCALE: N/A | MODEL TYPE: 2.0mm Crimp Style Connector |
| DWN | | VIEW: | PART NO.: X2011HF-05A-N0 |
| CHKD | | UNIT: mm/in | DWG NO.: X-X2011HF-05A-N0 |
| APPD | | SIZE: A4 | |

XKB INDUSTRIAL PRECISION CO.,LIMITED

| WEIGHT | SHEET | REVISION |
|---|---|---|
| | 1/1 | A0 |