东莞市讯普电子科技有限

Dongguan Xunpu Electronic Technology Co.,

# 承　认　书

# SPECIFICATION FOR APPROVAL

客 户 名 称 Customer：_____

贵司料号CUSTOMER P/N：_____

FFC cable 1.0mm,50P,total length 100mm,reverse,gold finger 4mm,reinforcing plate 8mm

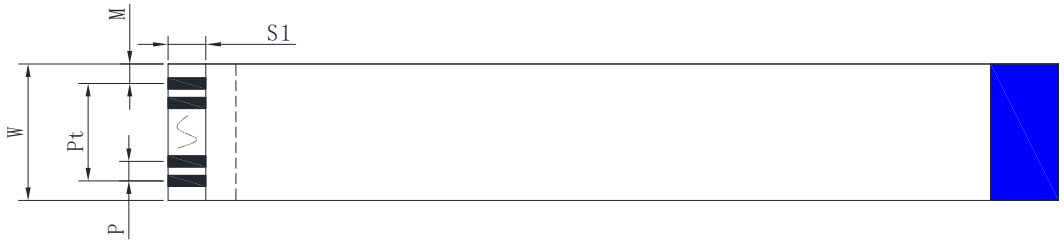
敝司料号INTERIOR P/N：FFC-1.0-50-100-B-4-8

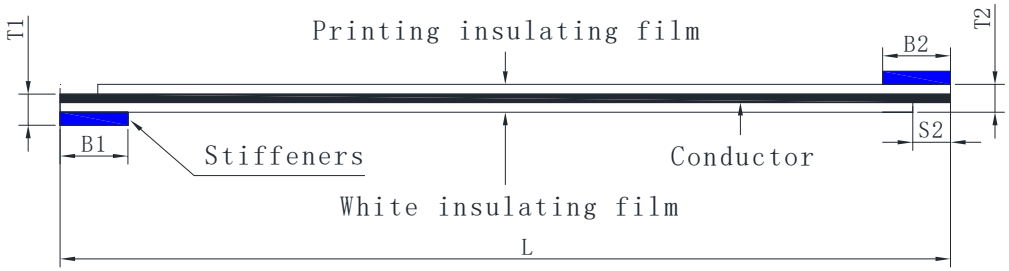
贵公司承认印 Approal slgnatures

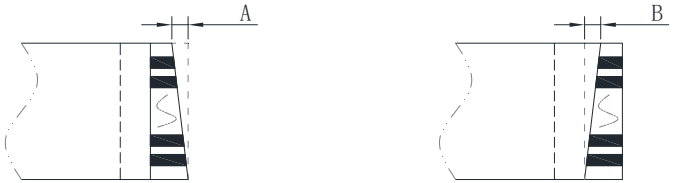
| 料 号/Part No. | 签　章/Signatures |
|---|---|
| | |

Send us a copy of reference, thank you!　　日期 Date:

| | |
|---|---|
| 拟制/Drawn | 李晓 |
| 审核/Check | 陈军 |
| 批准/Approved | 钰 |




| Structure | | | | |
|---|---|---|---|---|
| NO. | Project | Specification | | Remark |
| 1 | Insulating film | Print 20624 | 43um | 60V 80C |
| | | Blank film | 43um | |
| 2 | Stiffeners | Blue | 225um | PET |
| 3 | Conductor tinning | Thickness | 0.035 | ±0.005 |
| | | Width | 0.3 | ±0.03 |
| 4 | Conductor plating | Electroplate | Tin Sn | ⩾40u" |
| | | Electroplate | | |

| Size | | | |
|---|---|---|---|
| Number of conductor cores | N | 50 | |
| Spacing | P | 1.0 | ±0.05 |
| Total spacing | Pt | 49 | ±0.08 |
| Overall width | W | 51 | ±0.08 |
| Edge width | M | 1.0 | ±0.08 |
| Overall length | L | 100 | ±1.5 |
| Mating thickness | T1 | 0.3 | ±0.05 |
| Thickness of the thread | T2 | 0.12 | ±0.03 |
| The inclination of the line mouth | A | | ⩽0.3 |
| Punching inclination | B | | ⩽0.5 |
| The length of the bare copper at the wire port | S1/S2 | 4/4 | ±0.05 |
| Length of stiffener | B1/B2 | 8/8 | ±1 |

| Ancillary checklists | | | |
|---|---|---|---|
| NO. | Project | Specification | Quantity |
| 1 | | | |
| 2 | | | |
| 3 | | | |

Precautions

1. The body image is for relationship comparison only, and everything is subject to the specifications of the data sheet.

1. Shelf life: 12 months for gold plating; Tin plating for 6 months.
2. Storage environment: temperature 0°C'38°C; Humidity 20%'70%RH.

| Specifications and models: | FFC-1.0-50-100-B-4-8 | | |
|---|---|---|---|
| Customer part number: | | Customer model: | |

XunPu 东莞市讯普电子科技有限公司

| Version | Content of change | date | Name: | FFC flexible cable | Figure number: | XP2024080501 | Drawing: | Li ming |
|---|---|---|---|---|---|---|---|---|
| A/O | New production | 2022/09/05 | Proportion: | FIT | Unit: | Millimetre(mm) | Audit: | Chen Jun |
| | | | Vision: | | Page number: | Page 1 of 1 | Approved: | Xiang Yu |