
Kinghelm®

REVISIONS					
REV	NUMBER	DESCRIPTION	DWN	CHK	DATE
A		DESIGN			

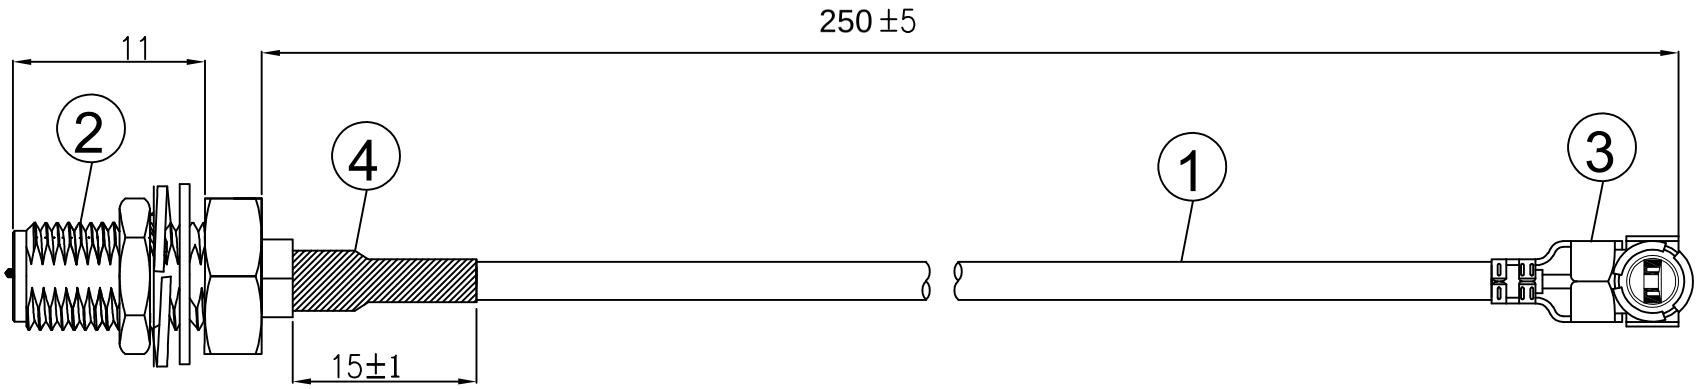

ITEM NO.	PART NUMBER	DESCRIPTION	QTY.
④	套管	黑色热缩套管，OD:2.0MM	AS
③	端子	国产I-PEX 0.81 1代端子，镀金	1
②	接头	SMA母头公针(反极性),11牙镀金,配件:华司/螺母/弹垫/红帽子	1
①	同轴线	RF0.81黑色同轴线,外被:FEP,OD:0.80mm	AS

NOTES:

1. ELECTRICAL:
   1.1. VOLTAGE RATING:DCV 300V 10MS
   1.2. CONDUCTANCE RESISTANCE: 3.0 OHM/MAX.
   1.3. INSULATION RESISTANCE: 5.0M OHM/MIN.
   1.4. THE CABLE SHOULD BE 100% ELECTRICAL TEST
   1.5. IT SHOULD BE NO ANY OPEN/SHORT, MISWIRING AND INTERMITTENT FAILURES.
2. MATERIAL:
   2.1. SEE TABLE
3. MECHANICALL:
   3.1. SMA PULL FORCE: 12.0KGS.
4. ALL COMPONENTS ARE RoHS COMPLIANT.

CUSTOMER P/N:

深圳市金航标电子有限公司

ALL DIMENSION ARE IN MM	DRAWN Jamy	DATE 2026 /07 /10	
	ENG.		TITLE: KH-RPSMAK-IPEX-RG0.81-B250MM I-PEX0.81 1代端子转SMA11牙母头公针
COMPUTER GENERATED IN SOLIDWORKS DO NOT SCALE THIS DRAWING	MFG.		
	Q.A.		SIZE B / Number / REV A
PROJECTION	GENERAL TOLERANCE FOR ANGLES X.X X.XX X.XXX ± 1° ± 0.3 ± 0.25 ± 0.150		SCALE: Free / TYPE / SHEET 1 OF 1