

© 2023 TE Connectivity. All Rights Reserved.

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	A3	REVISED(ECR-24-216835)	06AUG2024	DH	KT
	A4	REVISED(ECR-24-229346)	10DEC2024	DH	KT
	A5	REVISED(ECR-25-232626)	20JAN2025	DH	KT
	A6	REVISED(ECR-25-237918)	18MAR2025	HW	KT


P/N : 2446060-1/5,1897753-1,1743654-1,1743655-1,1743656-1,1897598-1

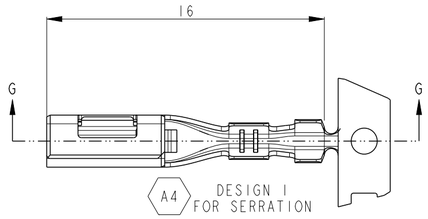



A4 DESIGN 1 FOR SERRATION




A6 DESIGN 2 FOR SERRATION



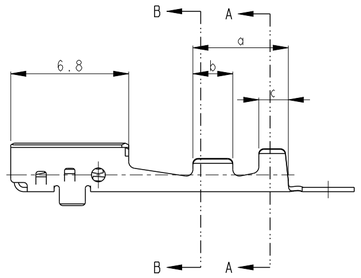






SECTION B-B



SECTION A-A










SECTION G-G


P/N : 2446060-2/3/4,368083-1,368084-1,368085-1

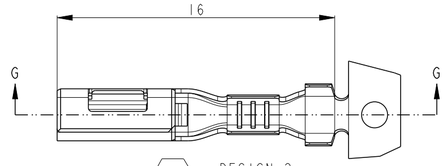


A4 DESIGN 2 FOR SERRATION



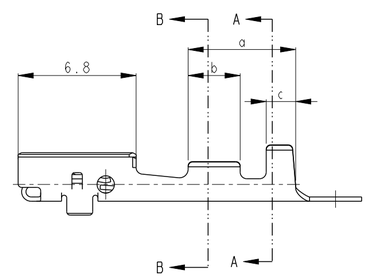






SECTION B-B



SECTION A-A



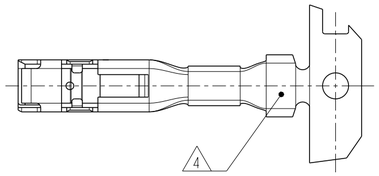



SECTION G-G

1. APPLICATOR FEED : 12.5 mm

A3 2. GENERAL TOLERANCE : 0≤XX<10: ±0.2mm, 10≤XX<30: ±0.25mm, ±3°

3. THIS PRODUCT IS DESIGNED TO BE COMPATIBLE WITH UN-SEALED APPLICATION.

4 TRADE MARK

<TERMINAL PART NUMBER INFORMATION> A4

REMARK	PART NUMBER	WIRE RANGE(mm²)	INSULATION Ø	DESIGN	MATERIAL	FINISH	a	b	c	d	(e)	f	(g)
~~SUPERSEDED BY 2446060-4~~	~~1743656-1~~	1.5~2.0	2.2~3.4	2	CuNiSi	PRE-TIN	~~6.7~~	~~3.5~~	~~1.7~~	~~3.25~~	~~3.4~~	~~3.92~~	~~4.12~~
~~SUPERSEDED BY 2446060-3~~	~~1743655-1~~	A5 0.75~1.25	1.8~2.2	2			~~6.2~~	~~3.0~~	~~1.7~~	~~2.76~~	~~2.88~~	~~3.92~~	~~4.12~~
~~SUPERSEDED BY 2446060-2~~	~~1743654-1~~	0.3~0.5	1.4~1.7	2			~~6.2~~	~~3.0~~	~~1.7~~	~~2.05~~	~~2.05~~	~~3.0~~	~~3.2~~
~~SUPERSEDED BY 2446060-5~~	~~1897598-1~~	2.5	2.9~3.1	2			~~6.85~~	~~3.8~~	~~1.7~~	~~3.5~~	~~4.1~~	~~3.8~~	~~4.1~~
~~SUPERSEDED BY 2446060-4~~	~~368083-1~~	2.0	2.6~2.7	2			~~7.0~~	~~3.8~~	~~1.7~~	~~3.0~~	~~3.07~~	~~4.5~~	~~3.9~~
~~SUPERSEDED BY 2446060-3~~	~~368084-1~~	0.85~1.25	1.8~2.2	2			~~7.2~~	~~4.0~~	~~1.7~~	~~3.0~~	~~2.97~~	~~4.5~~	~~3.9~~
~~SUPERSEDED BY 2446060-2~~	~~368085-1~~	0.3~0.5	1.4~1.7	2			~~6.2~~	~~3.0~~	~~1.7~~	~~2.3~~	~~2.29~~	~~3.6~~	~~3.25~~
~~SUPERSEDED BY 2446060-1~~	~~1897753-1~~	0.22	1.0~1.05	1			~~5.5~~	~~2.3~~	~~1.7~~	~~2.1~~	~~1.92~~	~~2.5~~	~~2.48~~
-	2446060-5	2.5	2.9~3.1	2	BRASS		6.85	3.8	1.7	3.5	4.1	3.8	4.1
-	2446060-4	2.0	2.6~2.7	2			7.0	3.8	1.7	3.0	3.07	4.5	3.9
-	2446060-3	A2 0.85~1.5	1.8~2.6	2			7.2	4.0	1.7	3.2	2.97	4.5	3.9
-	2446060-2	A5 0.3~0.85	1.4~1.9	2			6.2	3.0	1.7	2.3	2.29	3.6	3.25
-	2446060-1	A5 0.22~0.3	0.9~1.05	1			5.5	2.3	1.7	2.1	1.92	2.5	2.48

1471-9 (3/13)

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC	±
1 PLC	±0.1
2 PLC	±0.01
3 PLC	±0.001
4 PLC	±0.0001
ANGLES	±

MATERIAL: SEE TABLE

FINISH: SEE TABLE

DWN	JW SEO
CHK	DH PARK
APVD	KT JUNG
PRODUCT SPEC	108-160883
APPLICATION SPEC	114-160527
WEIGHT	-

TE Connectivity

NAME: 090K RECEPTACLE TERMINAL

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A2	00779	C-2446060	-

CUSTOMER DRAWING | SCALE 4:1 | SHEET 1 OF 1 | REV A6