


| 修订 REV | 标记 MARK | 修改摘要 REVISION DESCRIPTION | 签名 SIGNATURE | 日期 DATE |
|---|---|---|---|---|
| AO | | NEW DWG | | 2016-03-12 |
| | | | | |

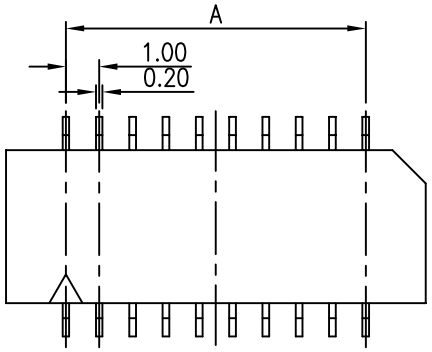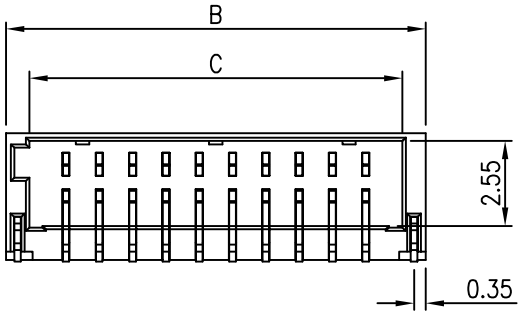



NOTES:

1. MATERIAL:
   HOUSING: HIGHT-TEMP PLASTIC,UL 94-V0,COLOR:NATURE OR BLACK;
   CONTACT: COPPER ALLOY;
   LEG: COPPER ALLOY;
2. PLATING:
   CONTACT: GOLD PLATED ON NICKEL OVERALL.
   LEG: : MATT TIN PLATED ON NICKEL OVERALL.
3. RATING:
   CURRENT RATING: 1.0A AC/DC
   VOLTAGE RATING: 50V AC/DC
   OPERATING TEMPERATURE : -40°C~+85°C;
4. PART NO:

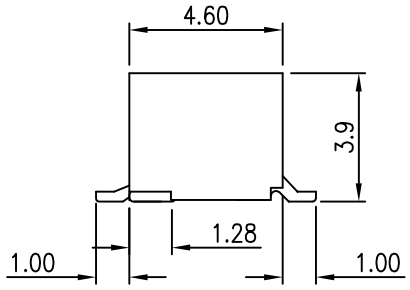


RECOMMANDED PCB LAYOUT
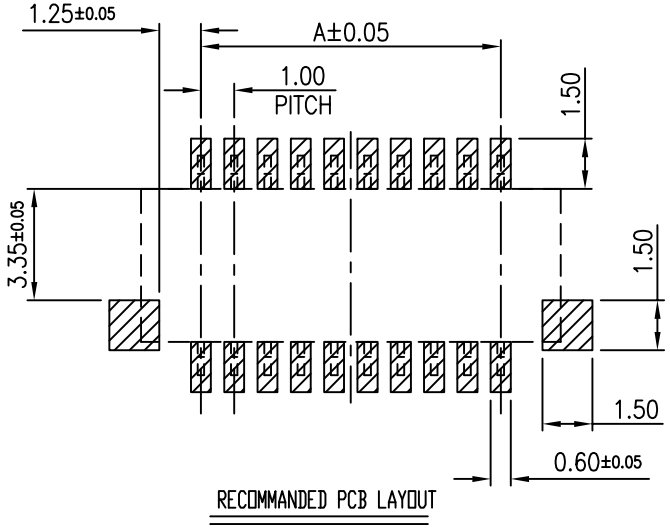
| CKT. | DIM A | DIM B | DIM C |
|---|---|---|---|
| 6 | 2.00 | 5.60 | 4.20 |
| 8 | 3.00 | 6.60 | 5.20 |
| 10 | 4.00 | 7.60 | 6.20 |
| 12 | 5.00 | 8.60 | 7.20 |
| 14 | 6.00 | 9.60 | 8.20 |
| 16 | 7.00 | 10.60 | 9.20 |
| 18 | 8.00 | 11.60 | 10.20 |
| 20 | 9.00 | 12.60 | 11.20 |
| 22 | 10.00 | 13.60 | 12.20 |
| 24 | 11.00 | 14.60 | 13.20 |
| 26 | 12.00 | 15.60 | 14.20 |
| 28 | 13.00 | 16.60 | 15.20 |
| 30 | 14.00 | 17.60 | 16.20 |
| 32 | 15.00 | 18.60 | 17.20 |
| 34 | 16.00 | 19.60 | 18.20 |
| 36 | 17.00 | 20.60 | 19.20 |
| 38 | 18.00 | 21.60 | 20.20 |
| 40 | 19.00 | 22.60 | 21.20 |
| 42 | 20.00 | 23.60 | 22.20 |
| 44 | 21.00 | 24.60 | 23.20 |
| 46 | 22.00 | 25.60 | 24.20 |
| 48 | 23.00 | 26.60 | 25.20 |
| 50 | 24.00 | 27.60 | 26.20 |


深圳市华德共创科技有限公司
Shenzhen Huade co-create Technology Co.,LTD
电话：0755-27111216 传真：0755-29940187


| -TOLERANCES- UNLESS OTHERWISE SPECIFIED 公差参数表 | | | | | | | |
|---|---|---|---|---|---|---|---|
| X.X ±0.30 | X.X° ±3° | APPD: 核准: | TITLE: 产品名称: | SHD1.0双排卧贴针座H=3.9 | | | |
| X.XX ±0.20 | X.XX° ±2° | CHECK: 校对: 王建业 | PART NO: 产品编号: | HDGC1002WRA-S-2XnP | | | |
| X.XXX ±0.10 | X.XXX° ±1° | DRAW: 绘图: 黄艳兰 | DATE | SCALE | UNIT | CODE NUMBER | |
| | | | 2016-03-12 | 1:1 | mm | A001 | |